


Auxiliary Power Cable Instructions For Hard Powering Passport 1000 P2 Installations (91- Option)

SARGENT
ASSA ABLOY

SECTION I: OVERVIEW

1. Description (Fig. 1).

 The auxiliary power cable (P/N 52-4029) is intended for use in Passport 1000 P2 installations when AA batteries are not used as the primary power source. It is intended only for use when connecting through an ElectroLynx™ harness to Sargent 3267 power supplies.

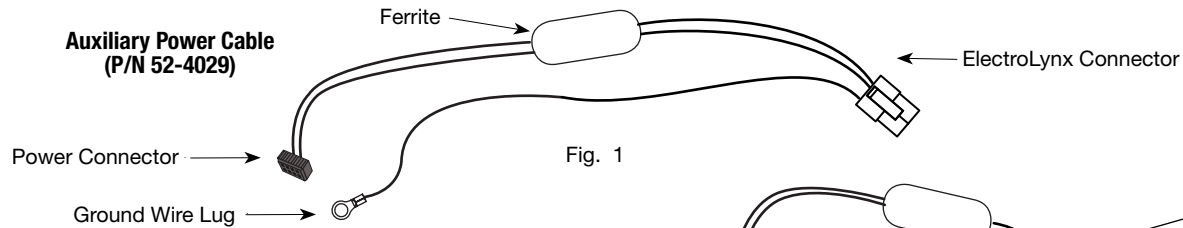

SECTION II: INSTALLATION PROCEDURE

1. Route ElectroLynx cable through the door.

Install cable while installing the door harness and lock assembly.

Note: This step is only necessary when not using a pre-wired door.

2. Connect auxiliary power cable to 8-pin ElectroLynx cable (Fig. 2).

Notes:

Connectors go on only one way.

- Do not force and do not offset connectors.
- Be sure they are completely seated (flush).

3. Route connector and ground wire (Fig 3).

Keep ferrite behind the fire plate and bring power connector and ground wire to the front.

4. Fasten ground wire and motor ground wire (Fig. 3).

- Fasten ground wire along with motor ground wire using lower right escutcheon screw.

5. Connect Hirose connector to circuit board (Fig. 4).

- Plug power connector to back of circuit board.
- Snap housing into place.

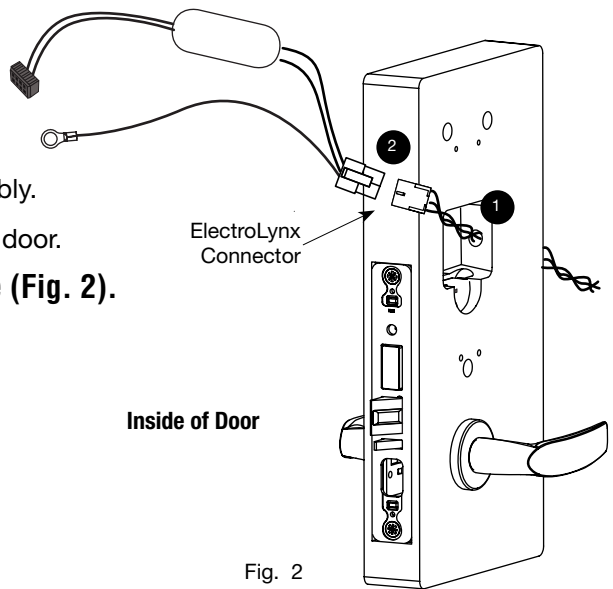


Fig. 2

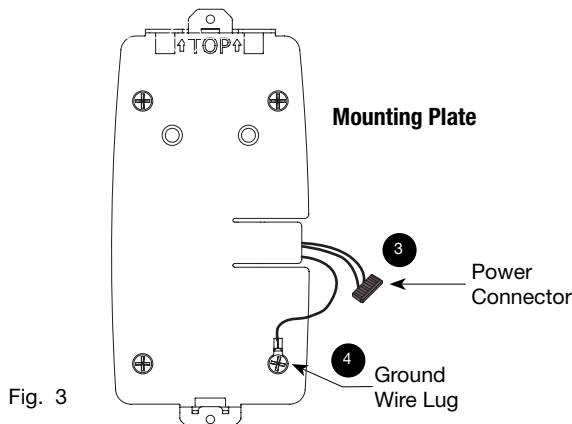


Fig. 3

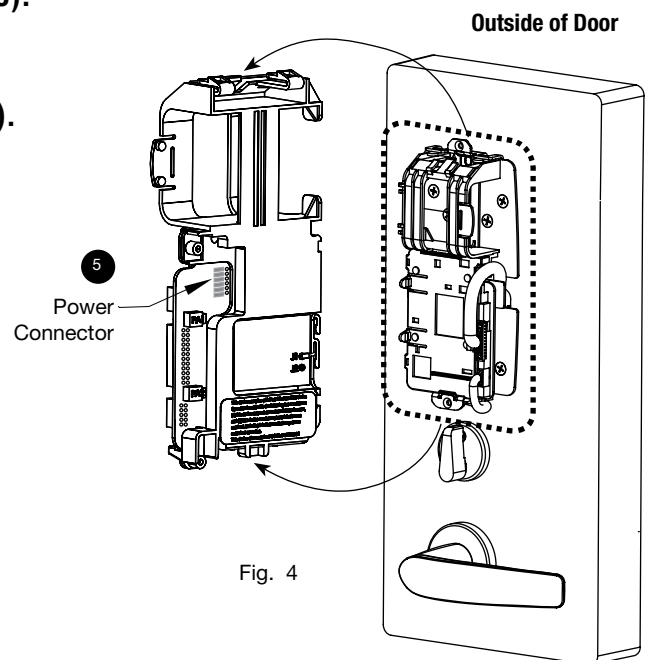


Fig. 4

FOR INSTALLATION ASSISTANCE CONTACT SARGENT • 1-800-810-WIRE (9473) • www.sargentlock.com