



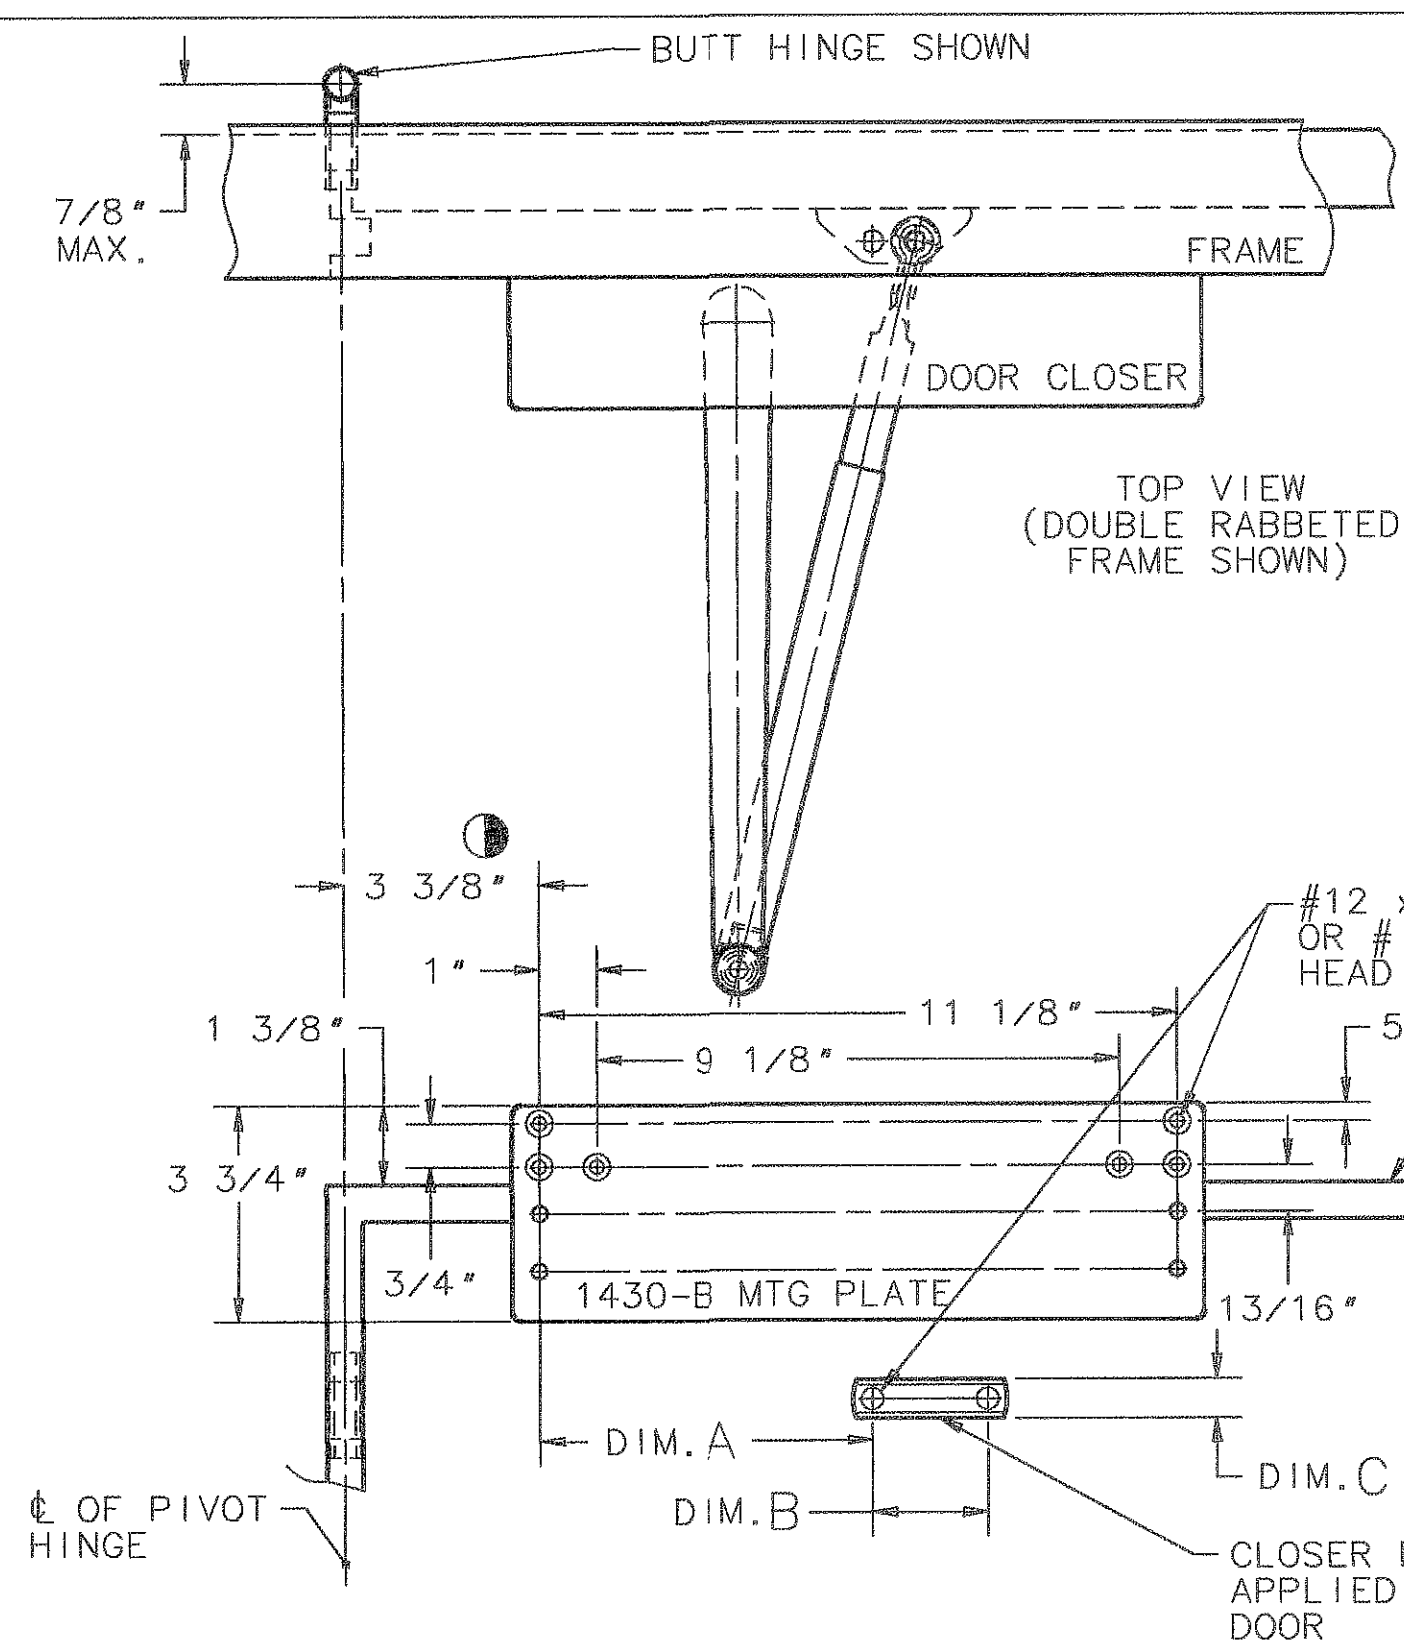

DESCRIPTION	TYPE ARM	DIM. A	DIM. B	DIM. C	DEPTH OF REVEAL	MAX. DOOR OPENING	RANGE OF HOLD OPEN
REGULAR ARM WITHOUT HOLD OPEN	RO & O	6"	2"	11/16"	0" TO 2"	180°	
	OZ	6 3/4"			2 1/8" TO 5"	140°	
	OZA	7 1/2"			5 1/8" TO 8"	140°	
90° HOLD OPEN FUSIBLE LINK	F	6"	2"	11/16"	0" TO 2"	140°	80°-130°
	FZ	6 3/4"			2 1/8" TO 5"	140°	
	FZA	7 1/2"			5 1/8" TO 8"	140°	
90°-180° HOLDER ARM	H	5 3/4"	2 1/2"	1 1/8"	0" TO 2"	180°	80°-180°
	HZ	6 1/2"			2 1/8" TO 5"	140°	
	HZA	7 1/4"			5 1/8" TO 8"	140°	

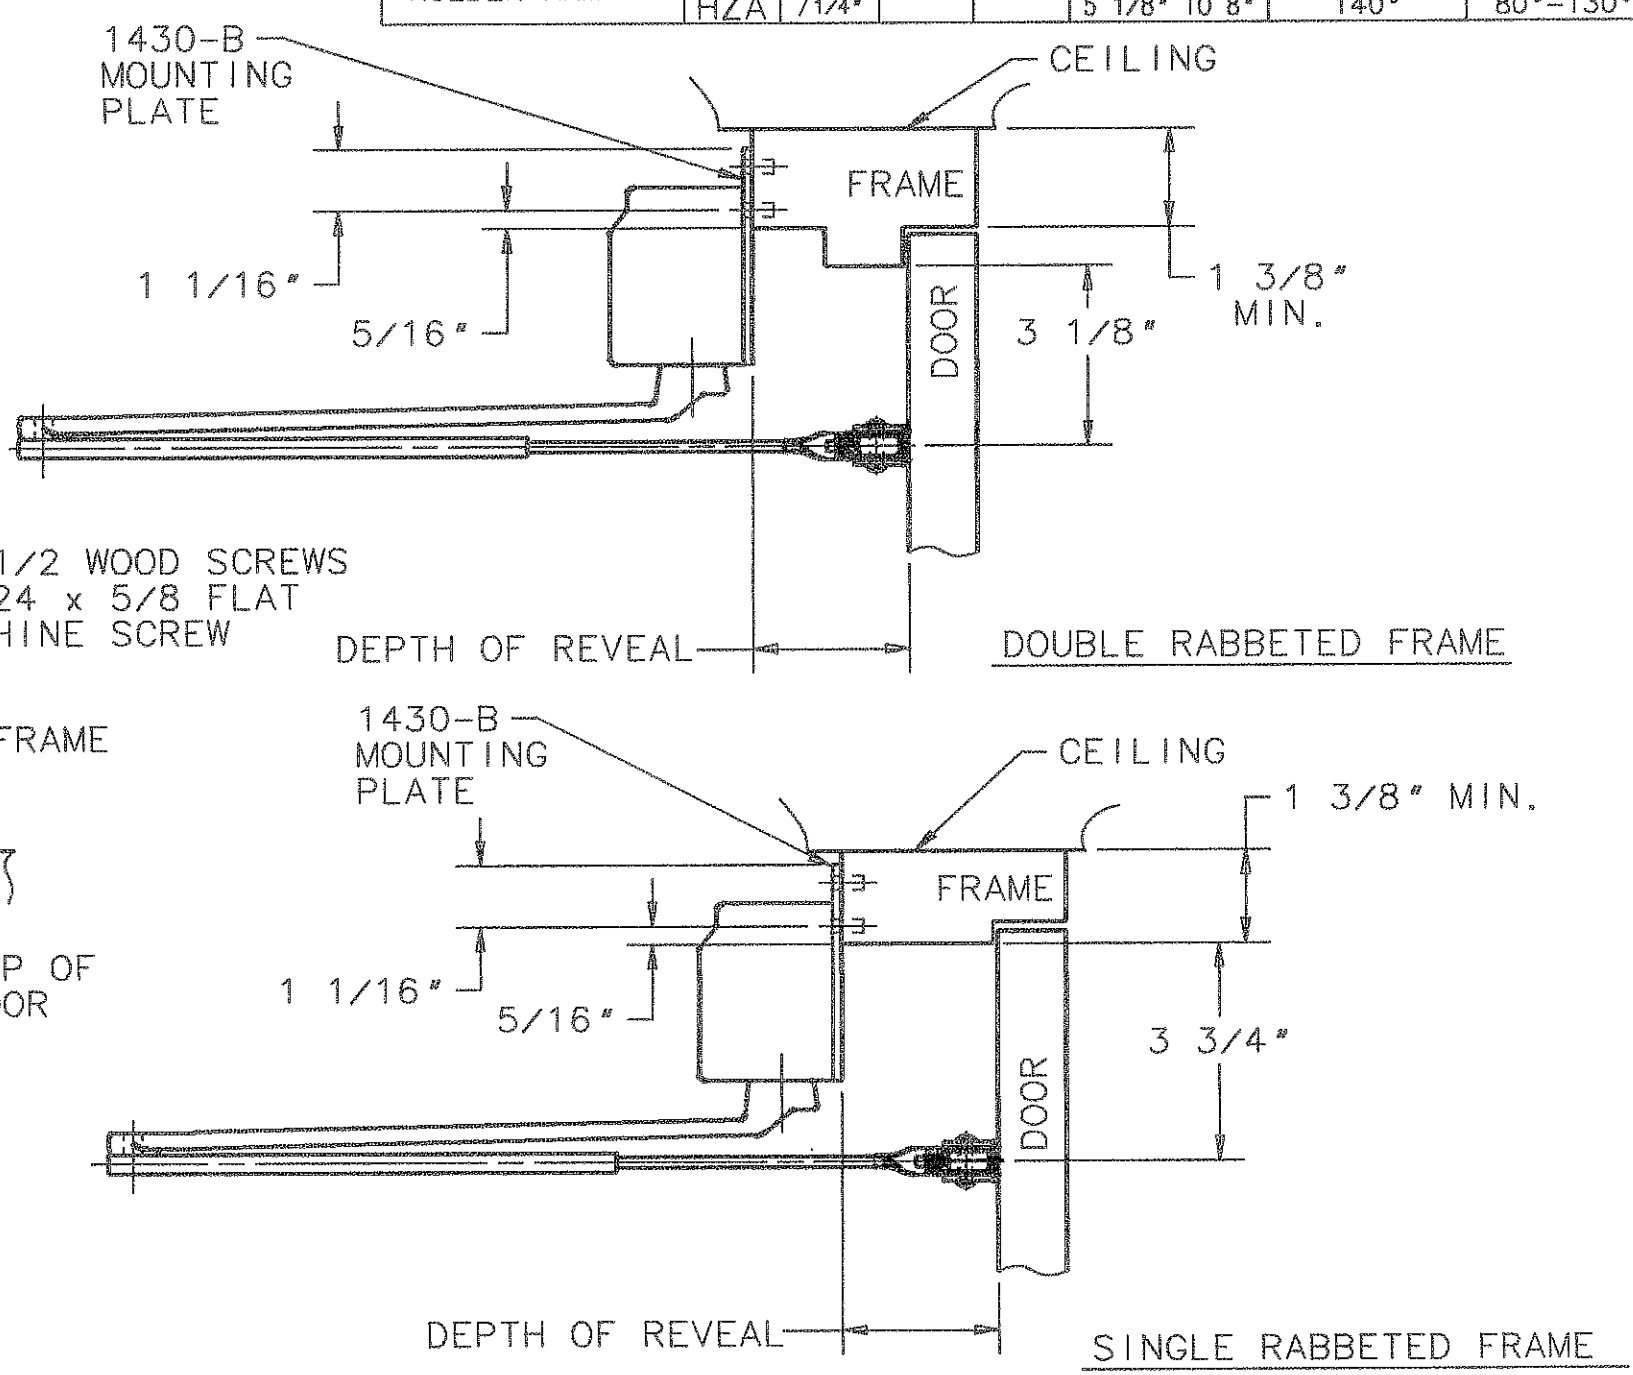

- ③ — LEFT HAND DOOR SHOWN, RIGHT HAND OPPOSITE.
- ② — MAXIMUM DOOR OPENINGS SHOWN IN CHARTS APPLY TO DOORS UP TO 2 1/4" THICK ONLY.
- ① — 12 GAUGE MIN. REINFORCEMENTS REQUIRED FOR METAL DOORS AND FAMES.
- ④ — THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.

SARGENT MANUFACTURING COMPANY		NEW HAVEN, CONN. 06511	
DATA SHEET: 1430 SERIES CLOSER x TOP JAMB x LOW CEILING CONDITIONS APPLICATION - O, RO, H & F ARMS			EFFECTIVE DATE 15 JAN 99
			TEMPLET NO. A7167 B