
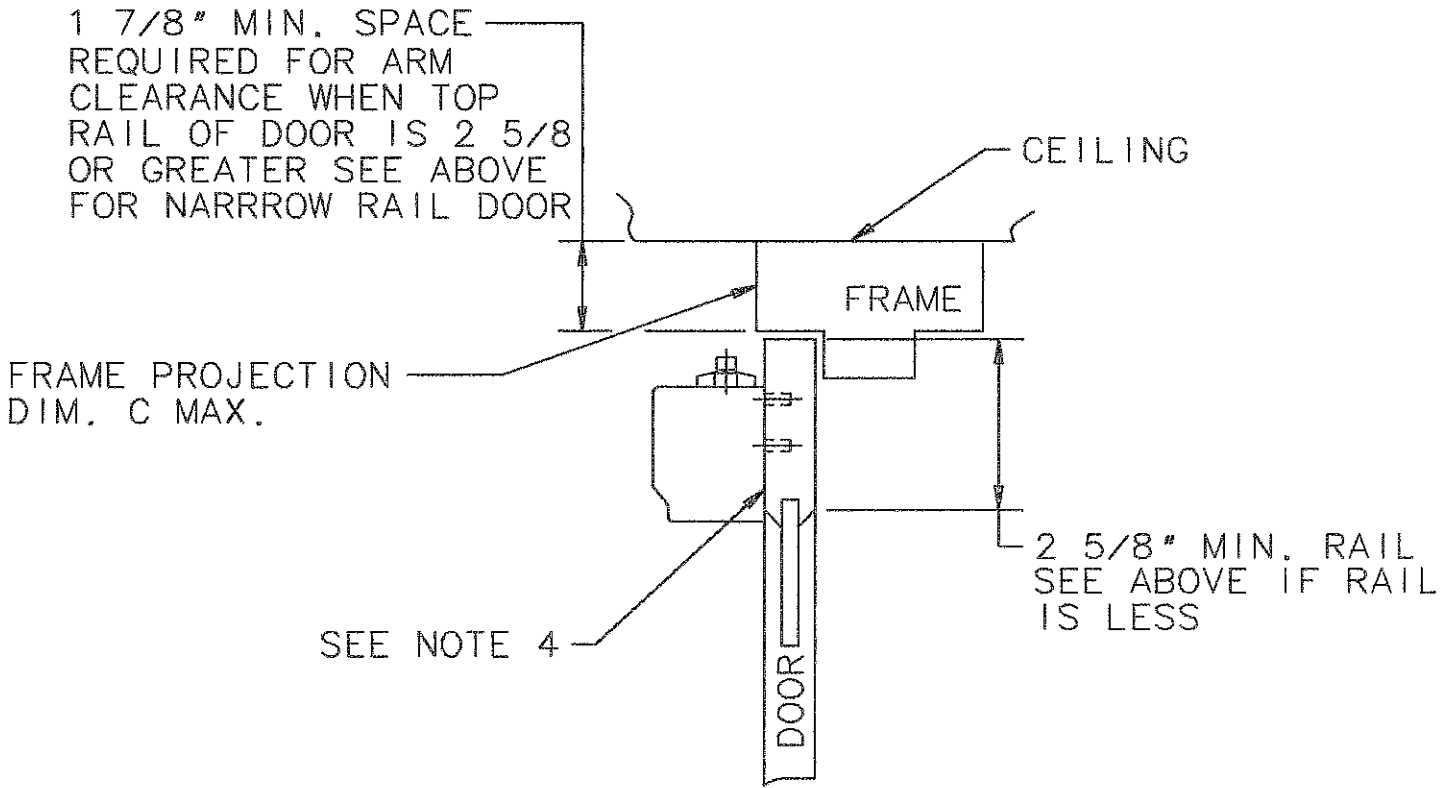
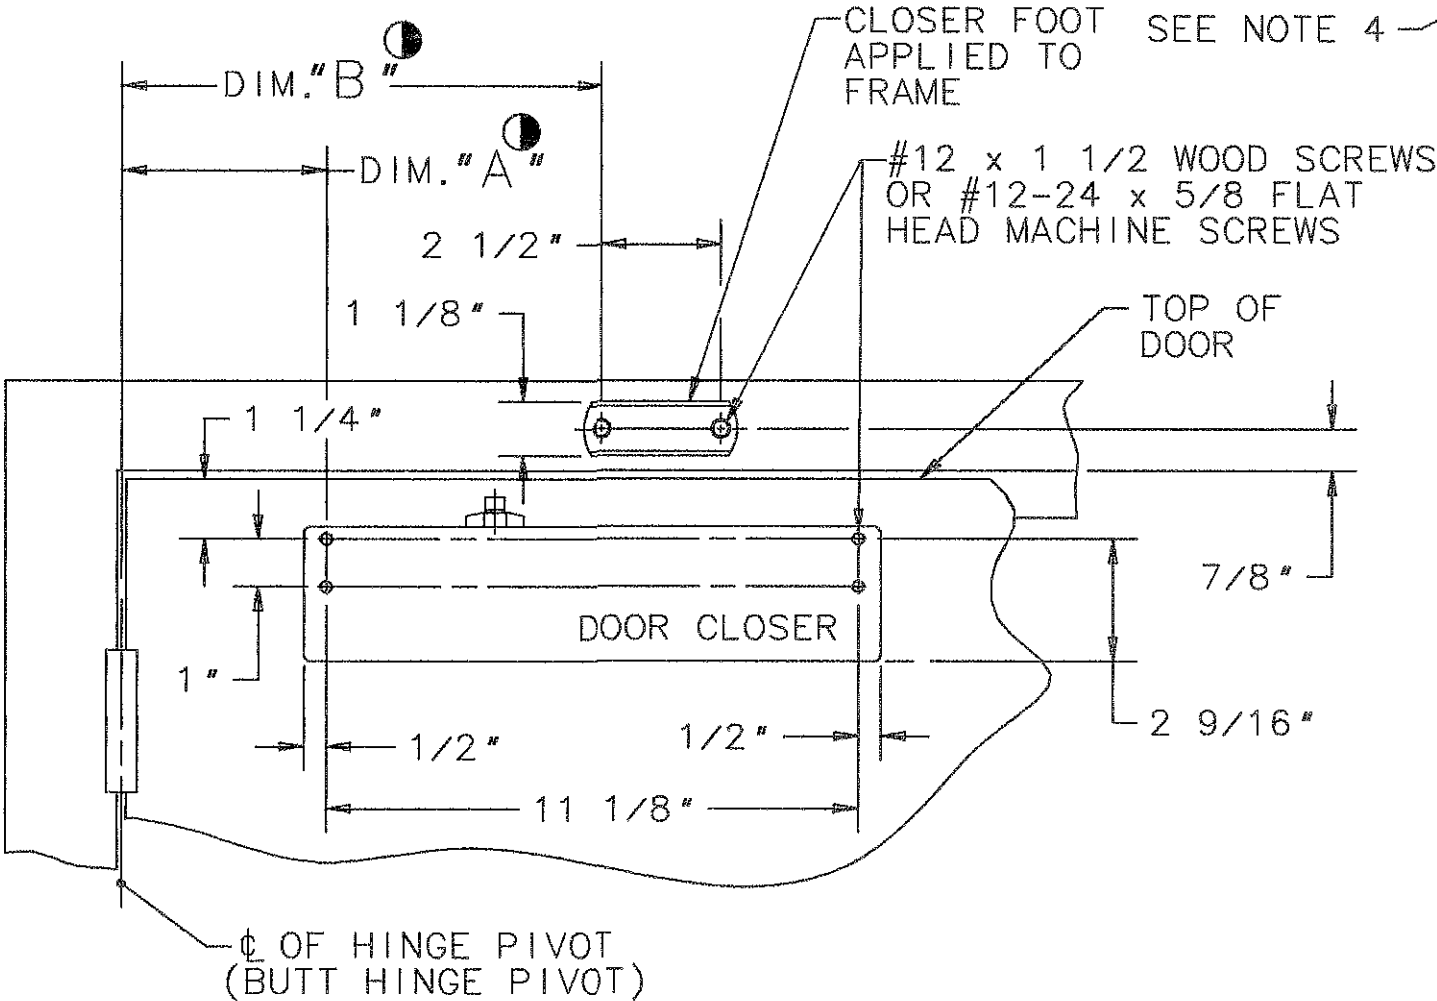


IMPORTANT: USE ALTERNATE MOUNTING IF DOOR CAN OPEN BEYOND LIMITS SHOWN FOR STANDARD MOUNTING

ARM TYPE	MOUNTING	MAX. DOOR OPENING	DIM. A	DIM. B
"H" HOLDER ARM	STANDARD	105°	7 1/2"	13 1/4"
	ALTERNATE	160°	4 1/4"	10"

FRAME PROJECTION PERMITTED FROM FACE OF DOOR

TOP DOOR RAIL MIN.	DIM. MAX. C
2 5/8	7/16
2 1/8 - 2 9/16	1/8
1 3/4 - 2 1/16	0

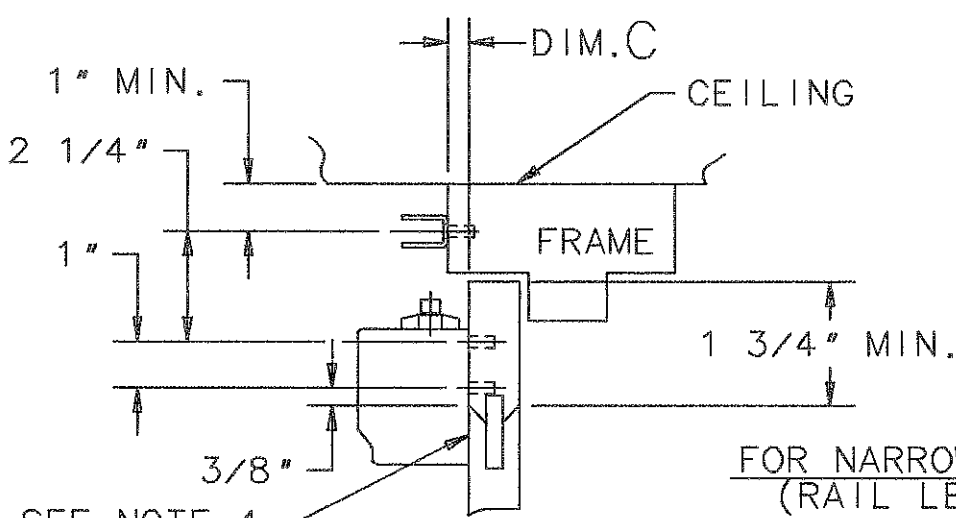

- ③ IF BUTT, FRAME AND WALL CONDITIONS PERMIT, CLOSER WILL ALLOW DOOR TO OPEN 180°.
- ② RIGHT HAND DOOR SHOWN. LEFT HAND OPPOSITE.
- ① 12 GAUGE MIN. REINFORCEMENT REQUIRED FOR METAL DOORS & FRAMES.

- ⑤ THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.
- ④ 1430-J COVER PLATE MAY BE USED WHEN CLOSER IS VIEWED THRU GLASS PANEL.

SARGENT MANUFACTURING COMPANY		NEW HAVEN, CONN. 06511	
DATA SHEET: 1430		EFFECTIVE DATE	
SERIES CLOSER x STANDARD ARM		1 SEPT. 97	
APPLICATION - "H" TYPE ARM		TEMPLET NO. A7127 A	