
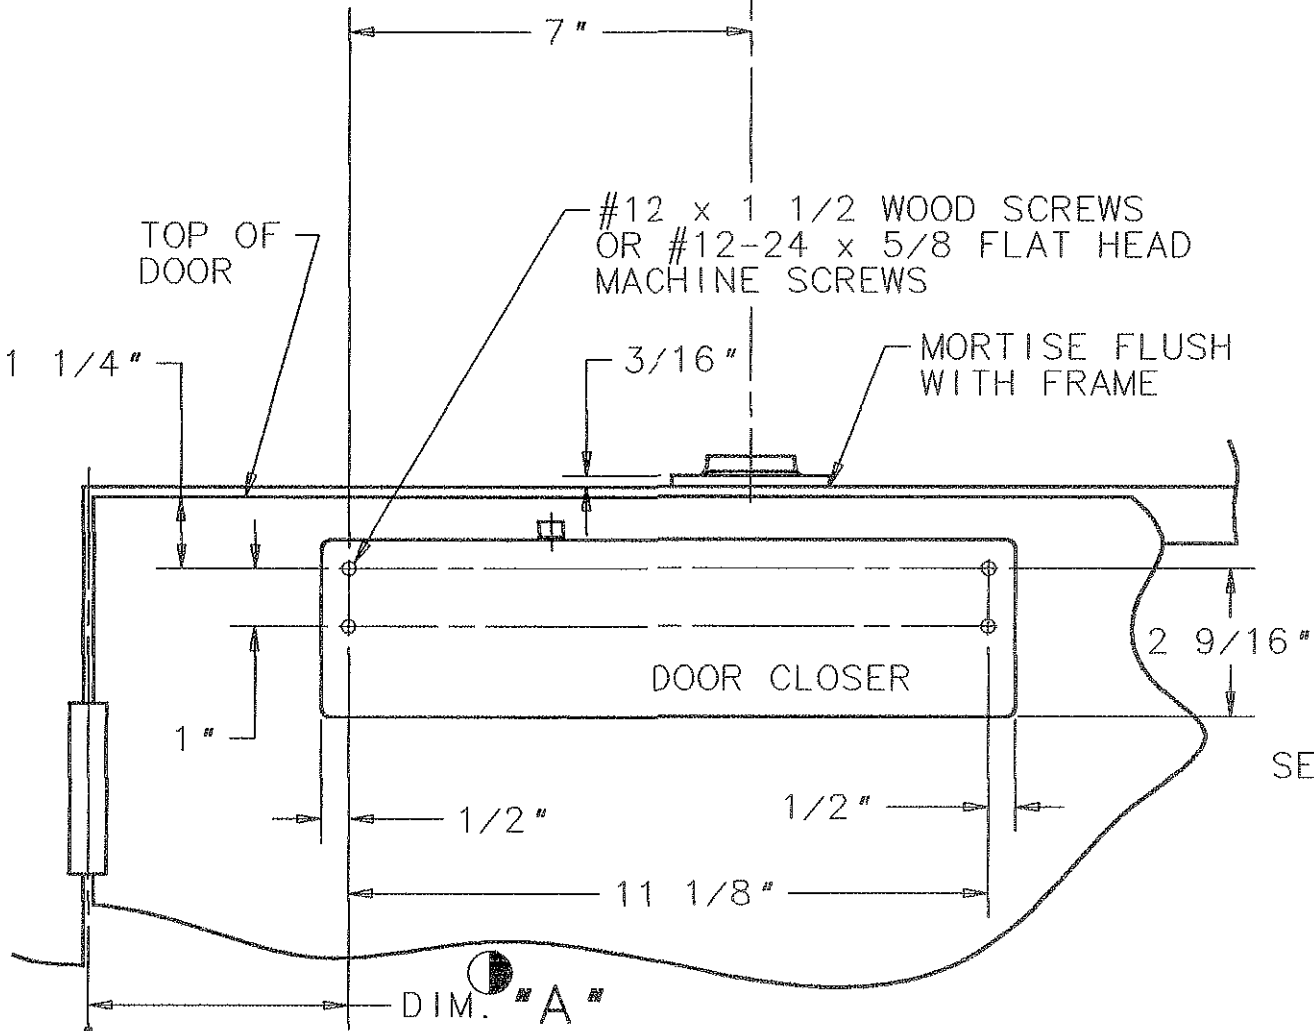
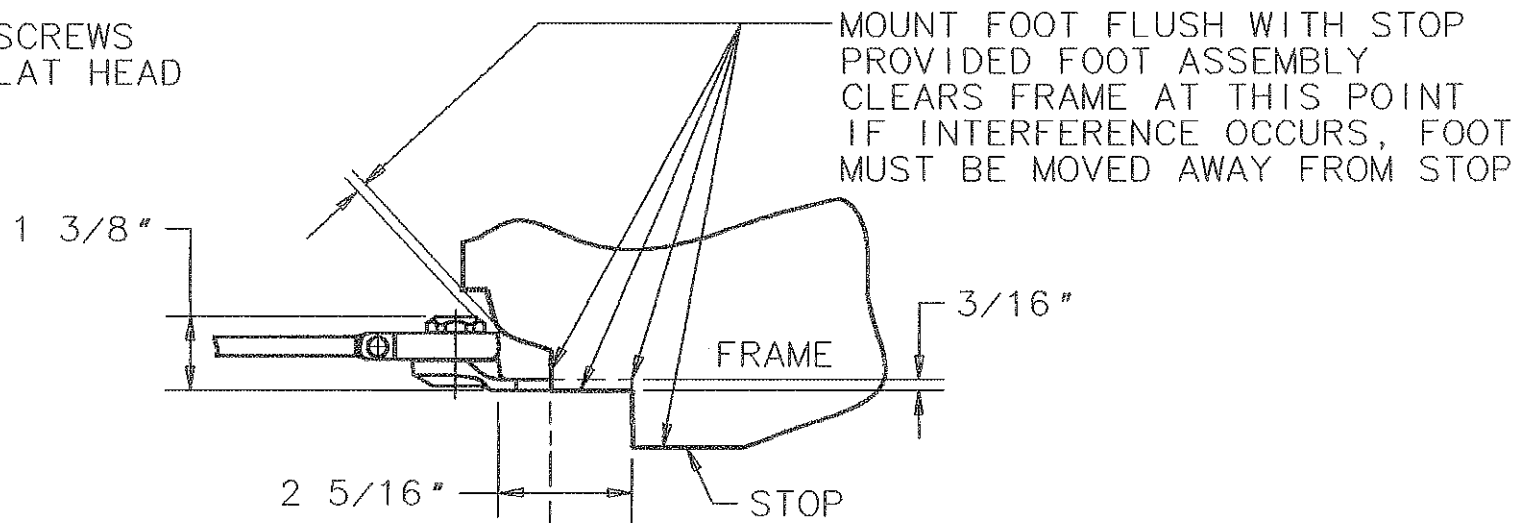



IMPORTANT: USE ALTERNATE MOUNTING IF DOOR CAN OPEN BEYOND LIMITS SHOWN FOR STANDARD MOUNTING

ARM TYPE	DESCRIPTION	STANDARD MOUNT		ALTERNATE MOUNT	
		DIM. A	MAXIMUM DOOR OPENING	DIM. A	MAXIMUM DOOR OPENING
H8	90°-180° HOLD OPEN ARM	7 1/2"	105°	4 1/2"	160°

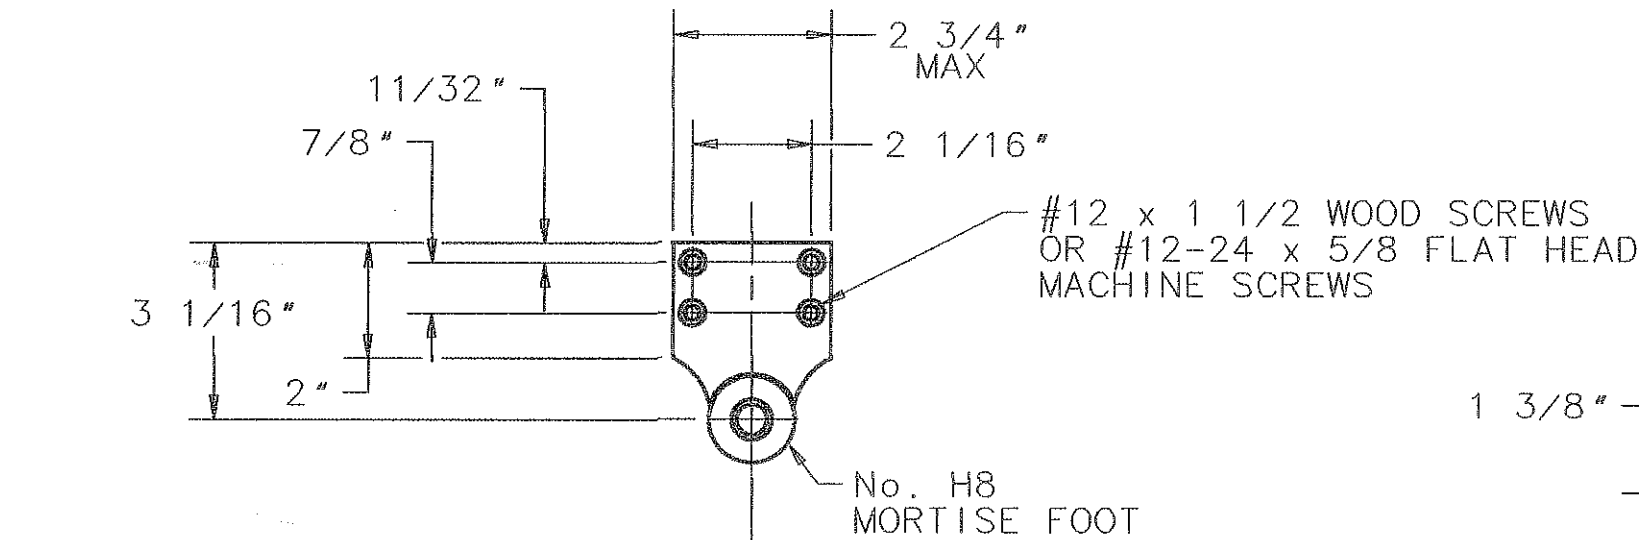

7/16 MAX. FRAME PROJECTION OF THIS SURFACE FROM FACE OF DOOR

DOOR RABBETED IN FRAME IF THIS DIMENSION IS GREATER THAN 1 15/16, MOVE FOOT AWAY FROM STOP BY THE FOLLOWING AMOUNT: (ACTUAL DIMENSION) MINUS (1 15/16)

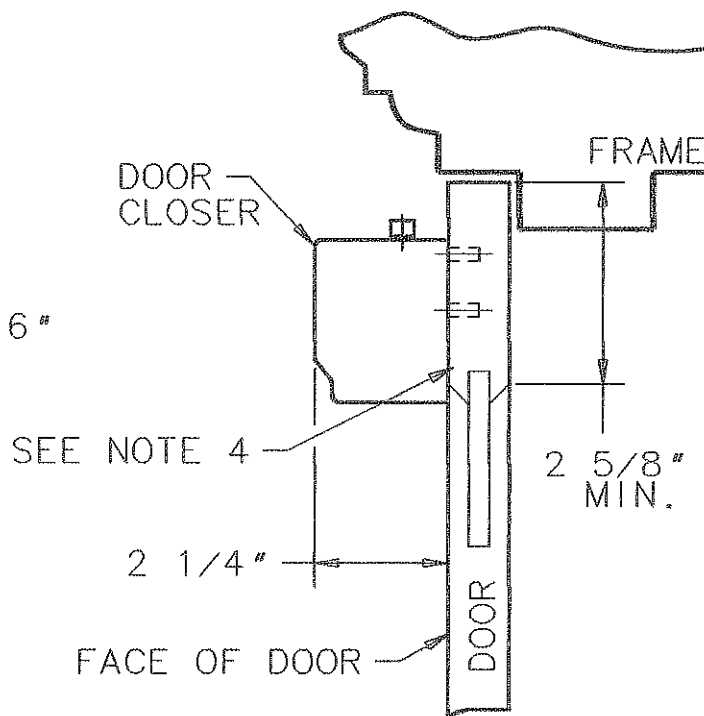

- ⑥ TYPE "H8" ARM ASSEMBLY HANDED AND MUST BE SAME HAND AS DOOR.
- ⑤ THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.
- ④ 1430-J COVER PLATE MAY BE USED WHEN CLOSER IS VIEWED THRU GLASS PANEL.
- ③ IF BUTT, FRAME AND WALL CONDITIONS PERMIT, CLOSER WILL ALLOW DOOR TO OPEN 180°.
- ② RIGHT HAND DOOR SHOWN. LEFT HAND OPPOSITE.
- ① 12 GAUGE MIN. REINFORCEMENT REQUIRED FOR METAL DOORS & FRAMES.

CL OF HINGE PIVOT:
BUTTS, OFFSET PIVOTS,
SWING CLEAR, CENTER HUNG
OR INVISIBLE HINGES

SARGENT MANUFACTURING COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET: 1430
SERIES CLOSER x STANDARD
ARM APPLICATION -H8 ARM

EFFECTIVE DATE
27 OCT 97
TEMPLET NO. A7206 B