



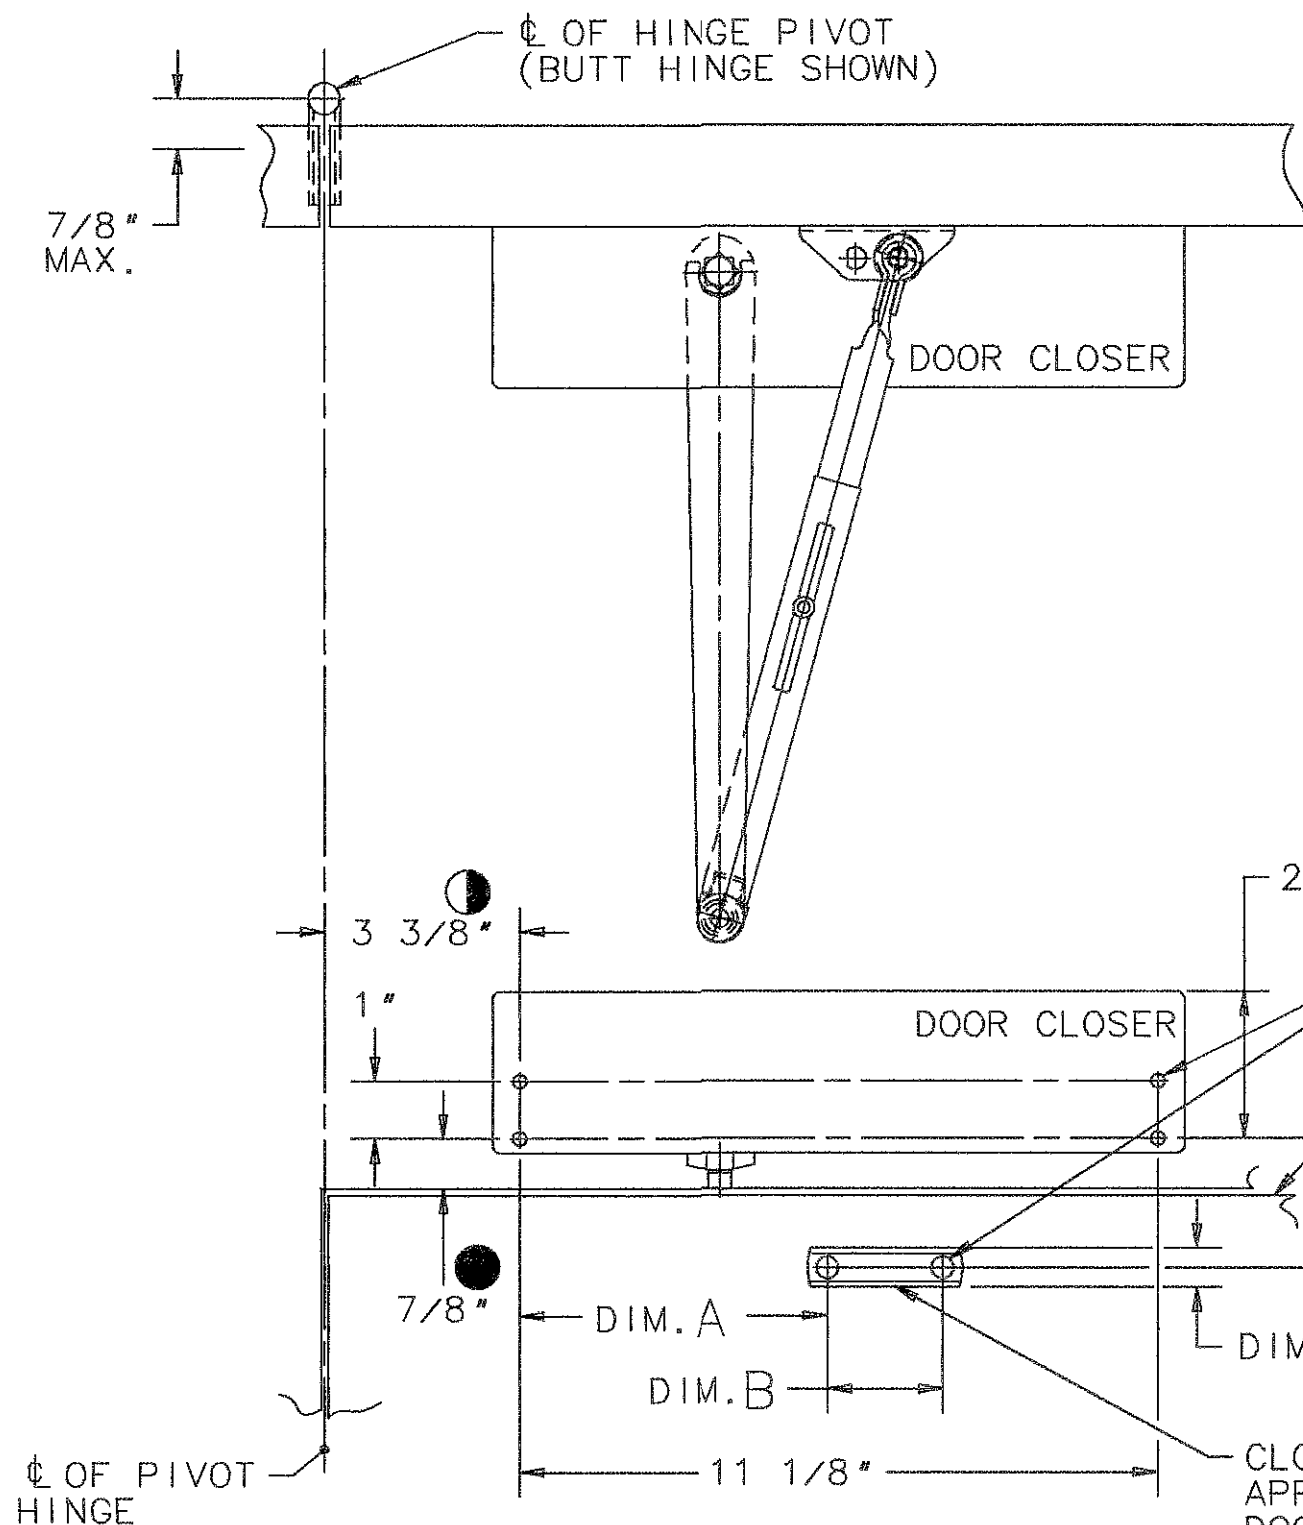


FOR FLUSH HEADER ONLY

DESCRIPTION	TYPE ARM	DIM. A	DIM. B	DIM. C	MAX. DOOR OPENING	RANGE OF HOLD OPEN
REGULAR ARM WITHOUT HOLD OPEN	RO & O	5 ³ / ₈ "	2"	11/16"	180°	
90° HOLD OPEN FUSIBLE LINK	F	5 ³ / ₈ "	2"	11/16"	140°	80°-130°
90°-180° HOLDER ARM	H	5 ³ / ₄ "	2 ¹ / ₂ "	1 ¹ / ₈ "	180°	80°-180°

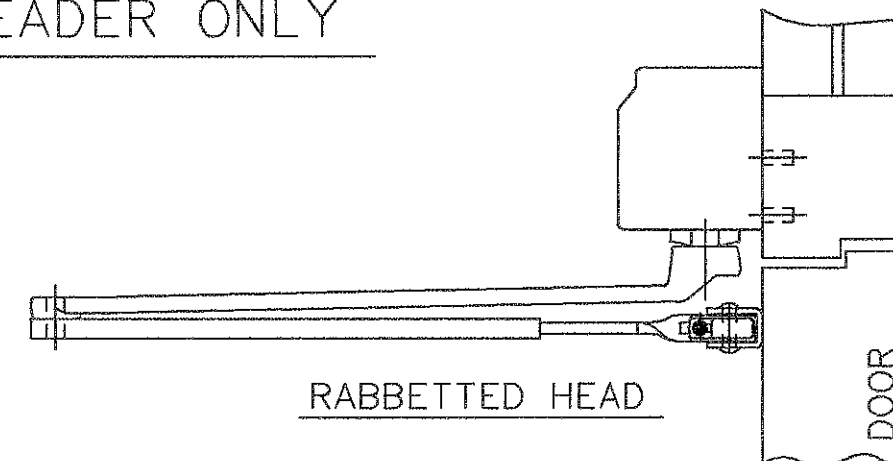

RABBETTED HEAD

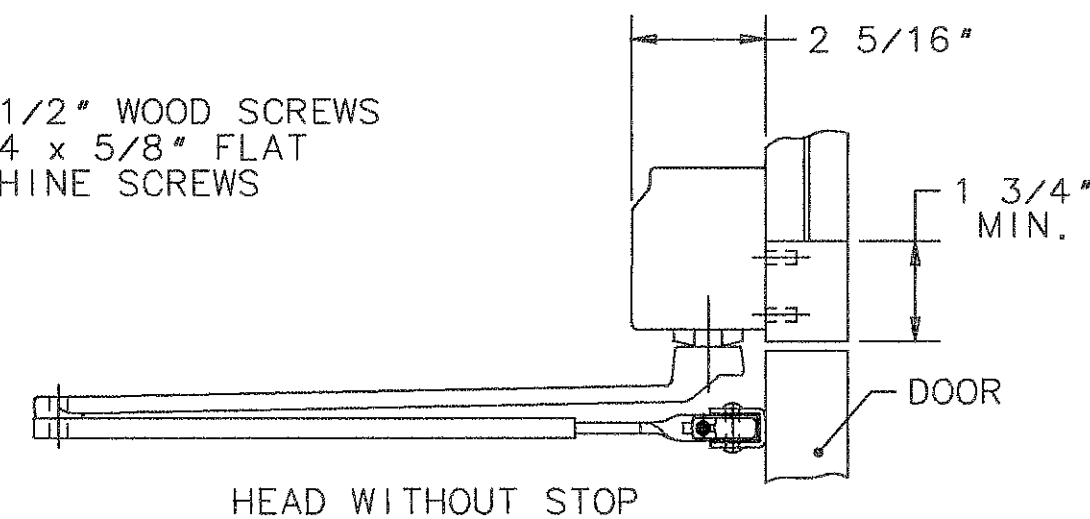

HEAD WITHOUT STOP

② — MAXIMUM DOOR OPENINGS SHOWN IN CHARTS APPLY TO DOORS UP TO 2 1/4" THICK ONLY.

① — 12 GAUGE MIN. REINFORCEMENTS REQUIRED FOR METAL DOORS AND FAMES.

⑥ — ● THIS DIMENSION MAY BE REDUCED TO 3/8" MIN. IF RAIL ON TOP CASING IS NARROW OR LOW CEILING CONDITIONS EXIST.

⑤ — LEFT HAND DOOR SHOWN, RIGHT HAND OPPOSITE.

④ — ● THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.

SARGENT MANUFACTURING COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET: 1430
SERIES CLOSER x TOP JAMB
APPLICATION - O, RO, H & F ARMS

EFFECTIVE DATE
1 SEPT. 97
TEMPLET NO. A7145 A