



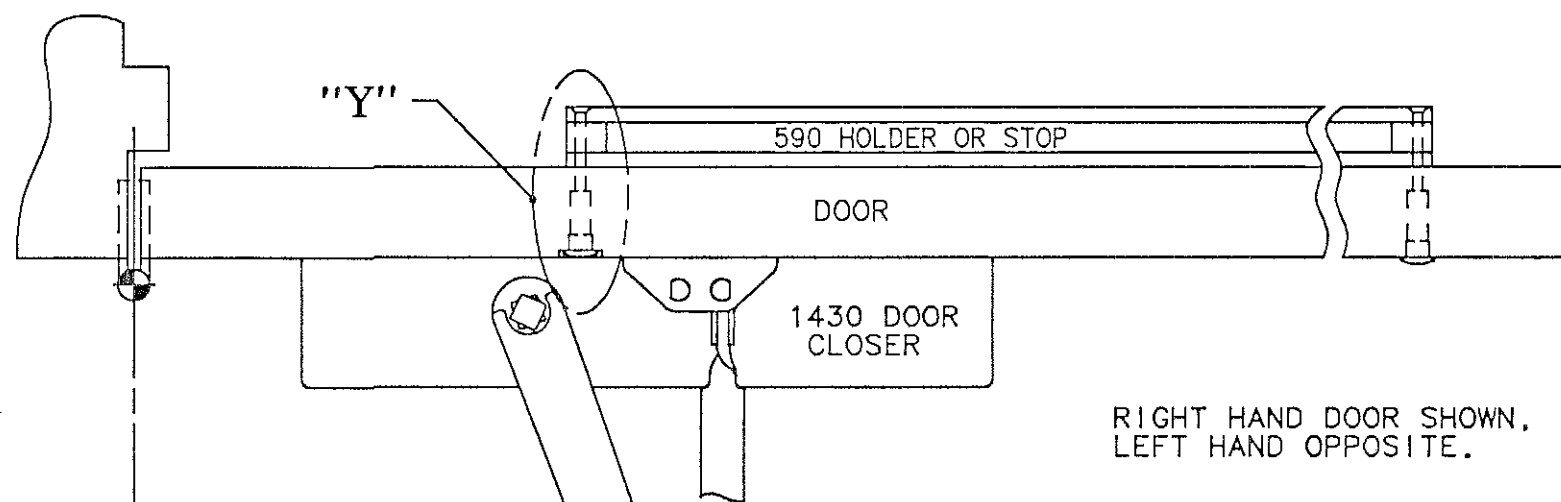


HOLDER/STOP MODEL NO.	DIM "A"	DIM "B"
597H & 597S	6 3/4"	12 1/8"
598H & 598S	4 3/4"	10 1/8"
599H & 599S	6 3/4"	12 1/8"

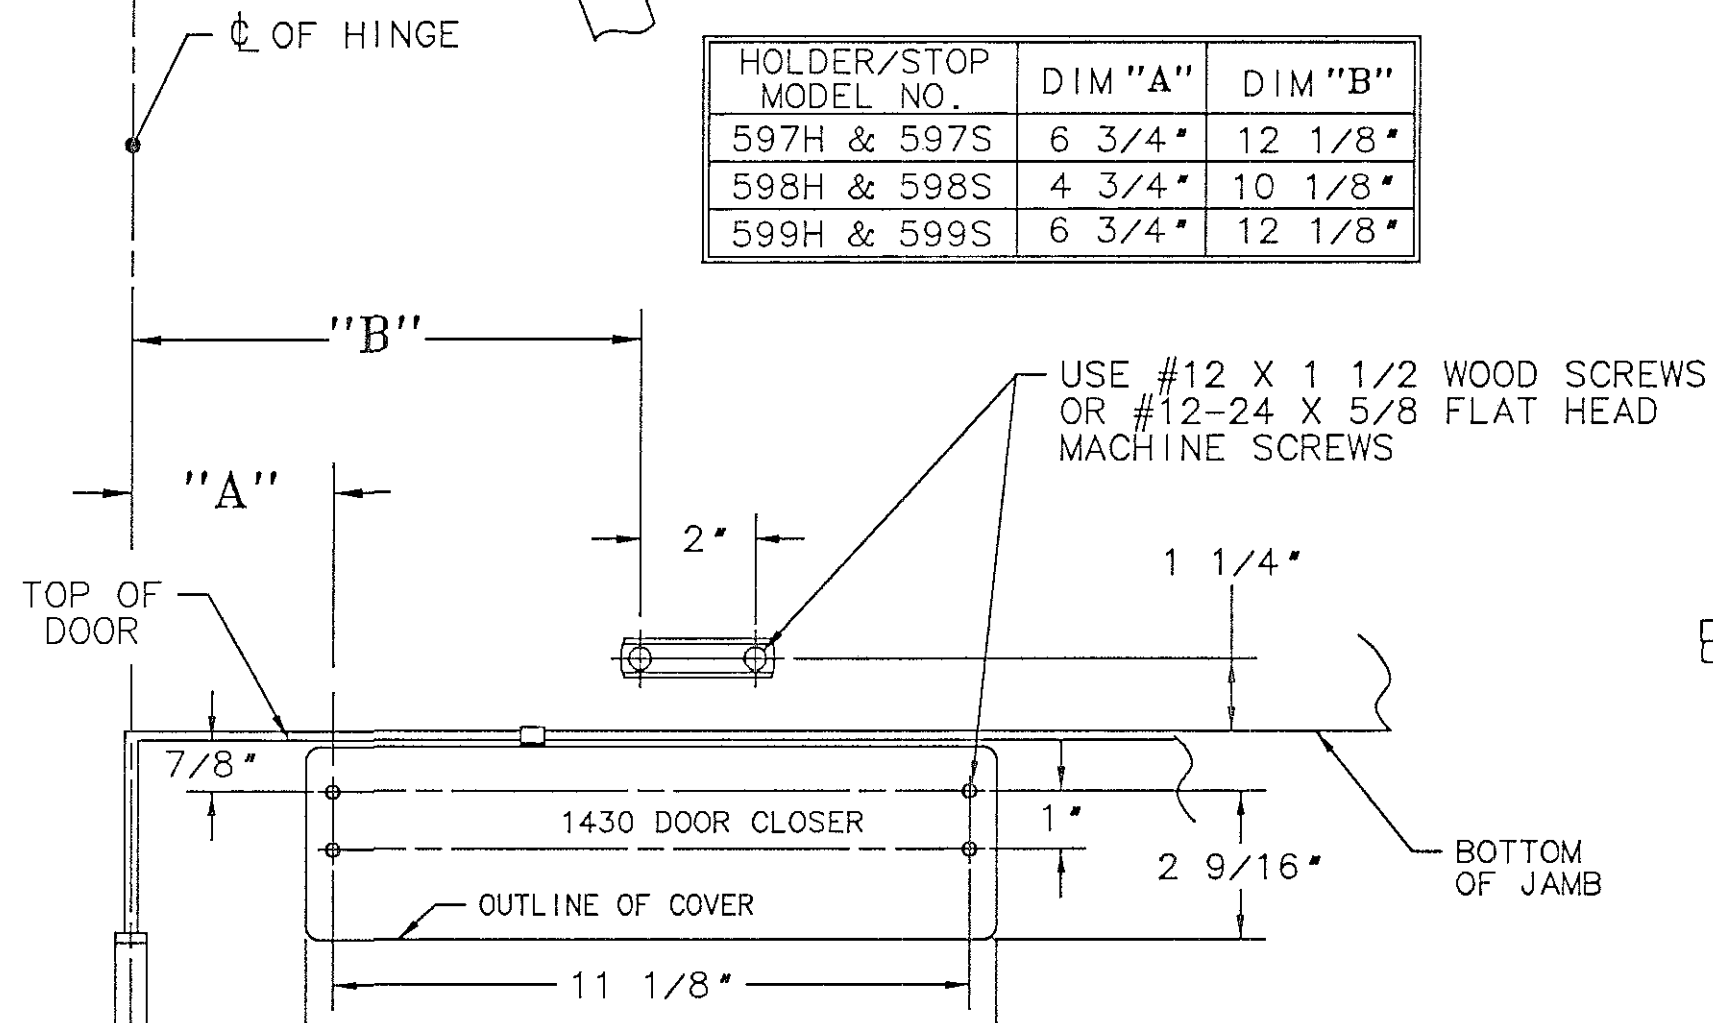

NOTES


1. REINFORCE METAL DOORS AND FRAMES PER ANSI A250.8 AND SDI-100 STANDARDS, 12 GAUGE RECOMMENDED.
2. FOR THIN TOP RAIL DOORS, USE 1430-D DROP PLATE SEE TEMPLATE A7168.
3. FOR 597-599 INSTALLATION, SEE TEMPLATES A7479 THRU A7481.
4. 1430-J COVER PLATE MAY BE USED WHEN CLOSER IS VISIBLE THROUGH GLASS.

WHEN THRU-BOLTING DOOR CLOSER,
THE TOP MORTISE NUTS MAY HAVE
TO BE RECESSED.

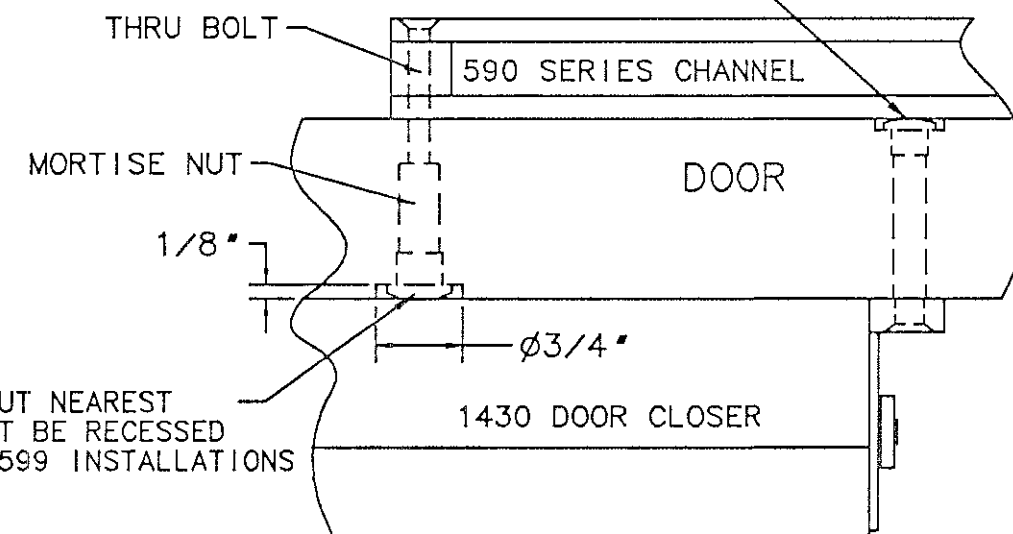

VIEW "Y"

MORTISE NUT HEADS MUST BE RECESSED
INTO DOOR WHEN CONFLICTS OCCUR.

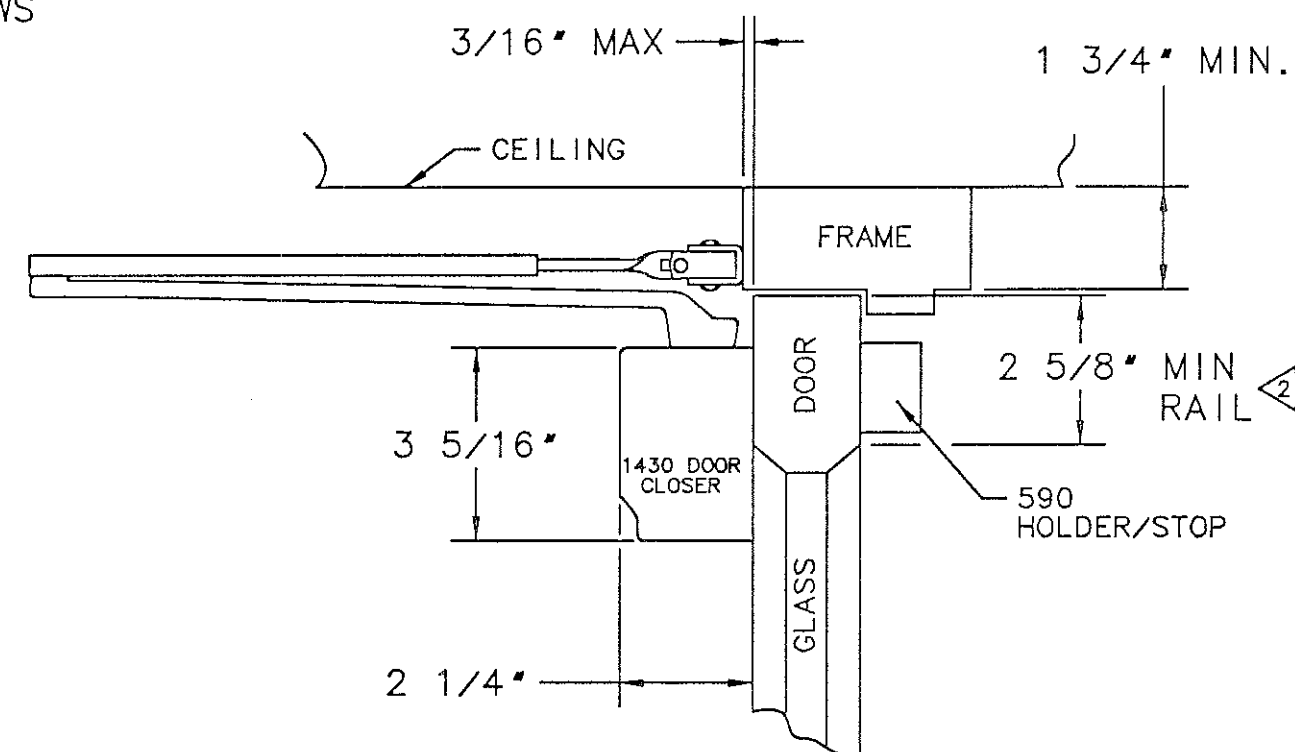

SARGENT® Manufacturing Company
100 Sargent Drive New Haven, CT 06511

DATA SHEET:
1430 SERIES CLOSER WITH STANDARD
APPLICATION O & RO ARM & 597-599
SERIES HOLDER OR STOP

EFFECTIVE DATE
APRIL 02
TEMPLATE NO.
A7550 B