



ARM TYPE	DESCRIPTION	STANDARD MOUNTING		
		DIM. A	DIM. B	MAXIMUM DOOR OPENING
"OLC"	LOW PROFILE REGULAR ARM (WITHOUT HOLDER)	6 3/4"	12 1/8"	120°
		ALTERNATE MOUNTING		
		DIM. A	DIM. B	MAXIMUM DOOR OPENING
		4 3/4"	10 1/8"	160°

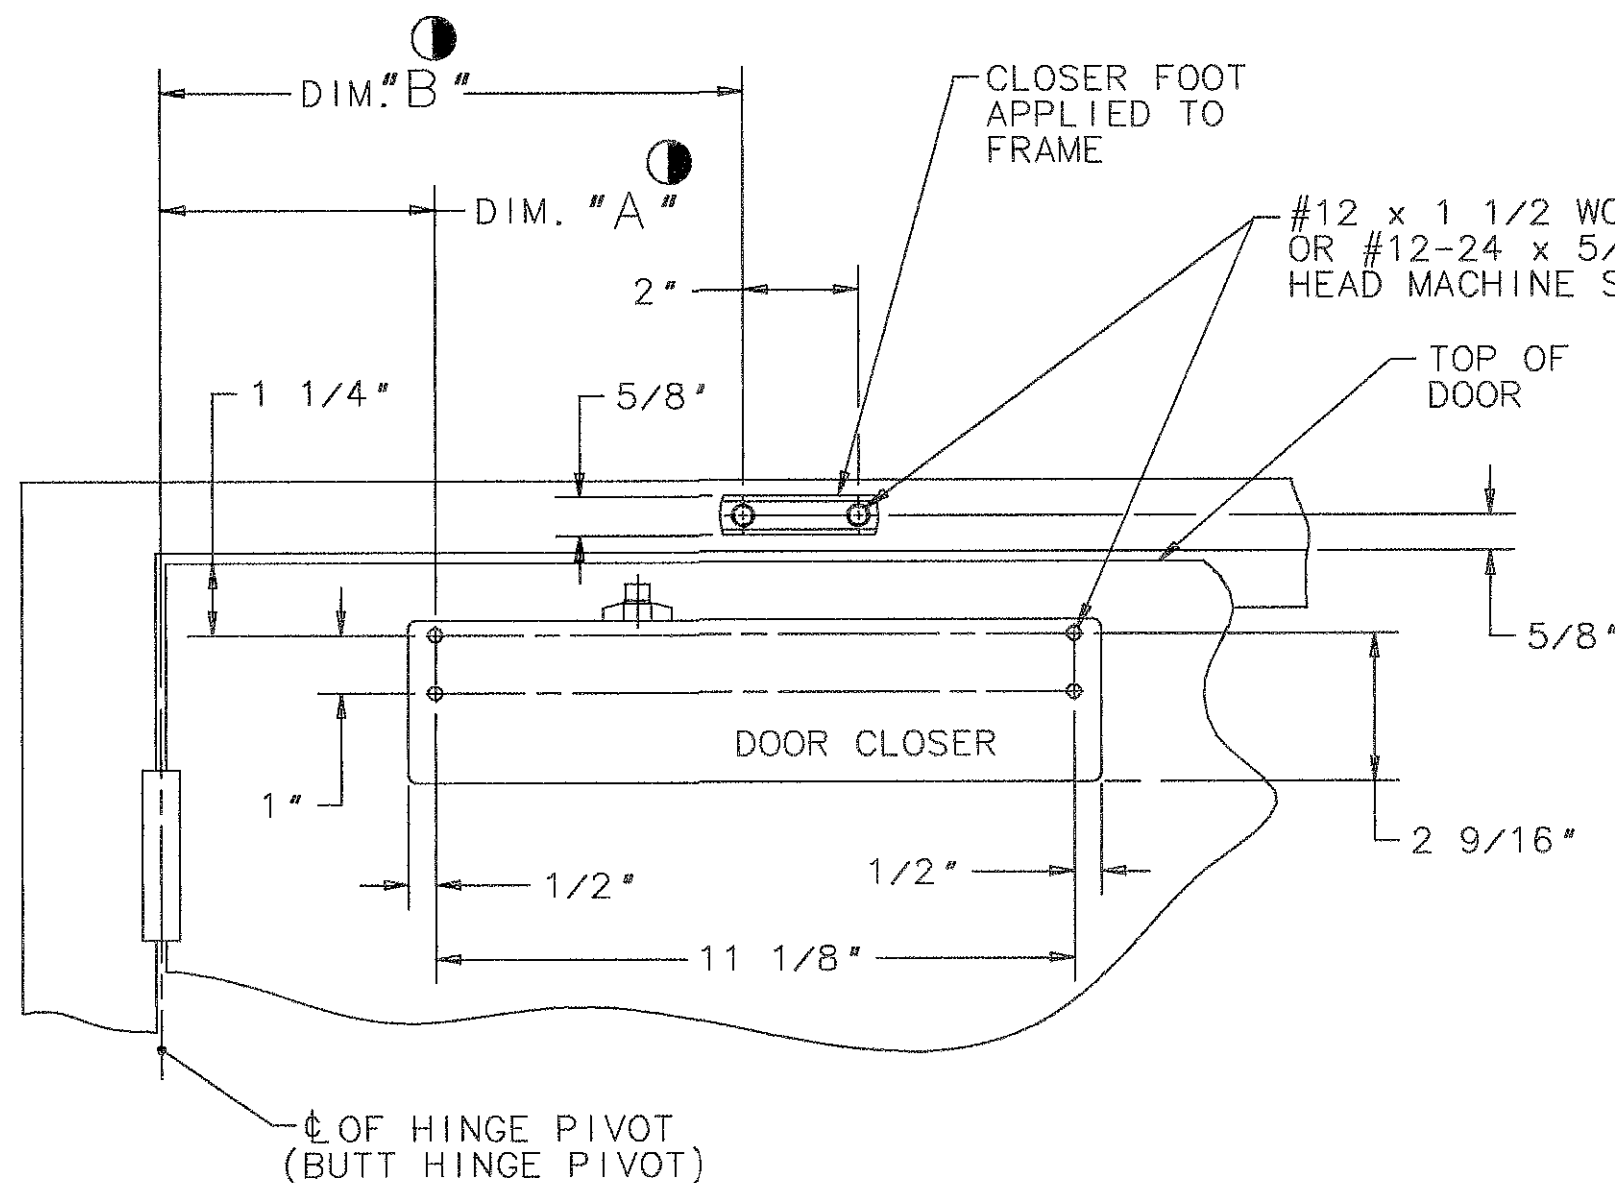

1 1/4 MIN. SPACE
REQUIRED FOR ARM
CLEARANCE

7/16 MAX. FRAME
PROJECTION PERMITTED
FROM FACE OF DOOR

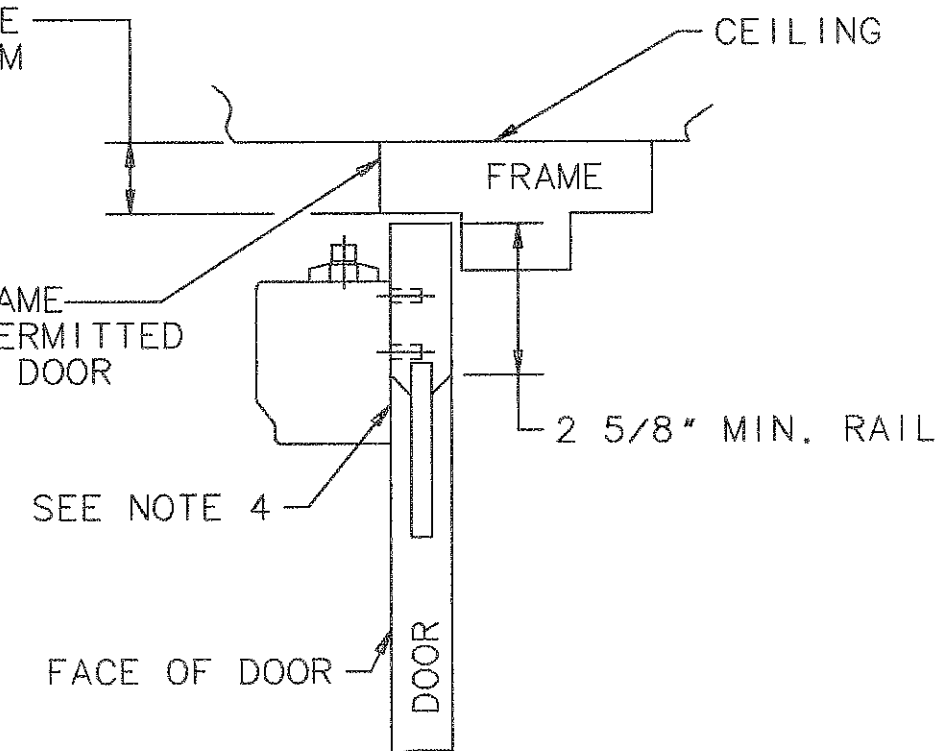

- ⑤ THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.
- ④ 1430-J COVER PLATE MAY BE USED WHEN CLOSER IS VIEWED THRU GLASS PANEL.
- ③ IF BUTT, FRAME AND WALL CONDITIONS PERMIT, CLOSER WILL ALLOW DOOR TO OPEN 180°.
- ② RIGHT HAND DOOR SHOWN. LEFT HAND OPPOSITE.
- ① 12 GAUGE MIN. REINFORCEMENT REQUIRED FOR METAL DOORS & FRAMES.

SARGENT MANUFACTURING COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET: 1430
SERIES CLOSER x STANDARD ARM
APPLICATION - OLC

EFFECTIVE DATE
1 SEPT. 97
TEMPLET NO. A7126 A