
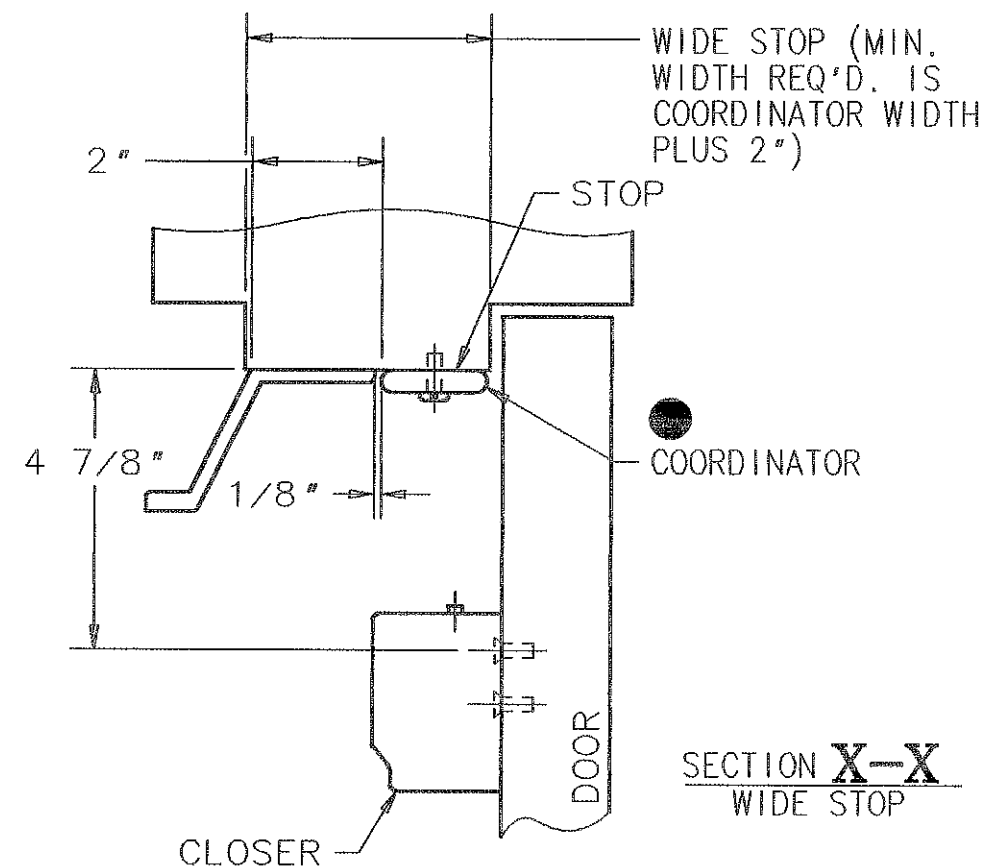
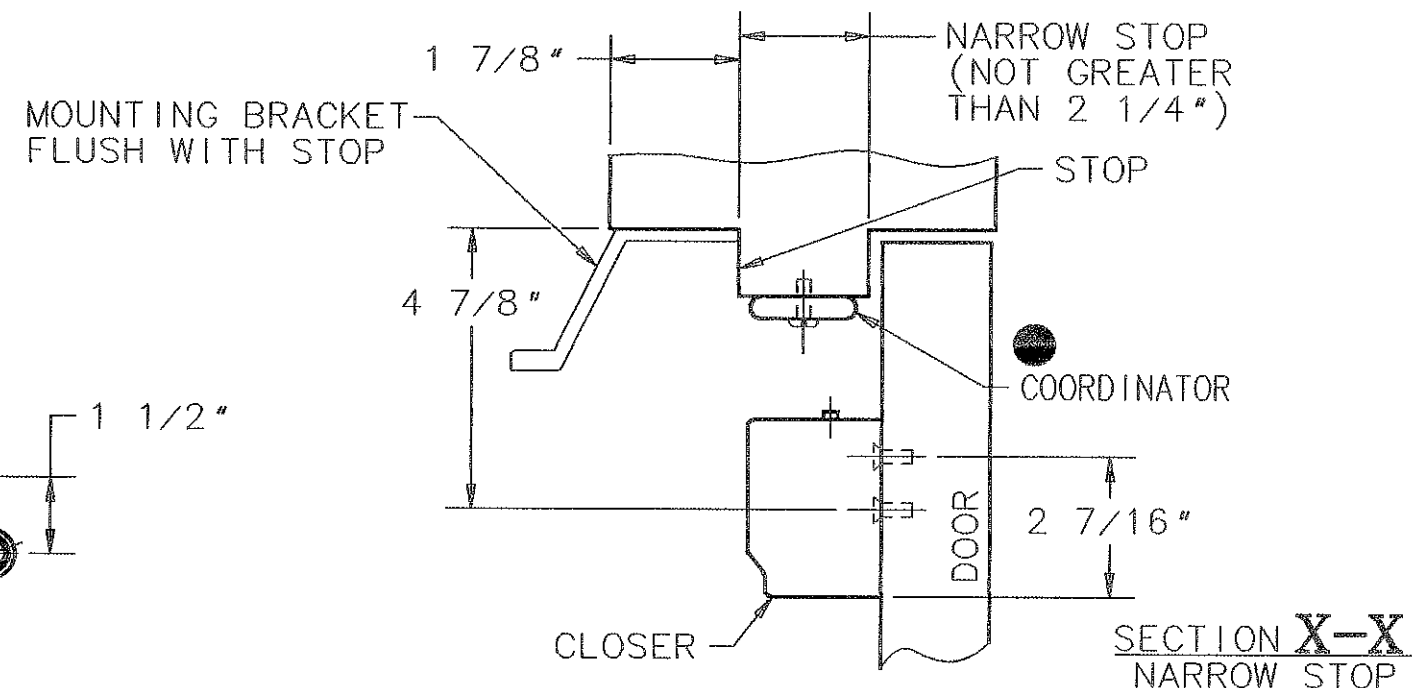


IMPORTANT: USE ALTERNATE MOUNTING IF DOOR CAN OPEN BEYOND LIMITS SHOWN FOR STANDARD MOUNTING

ARM TYPE	DESCRIPTION	STANDARD MOUNTING			ALTERNATE MOUNTING		
		DIM. A	DIM. B	MAX. DOOR OPENING	DIM. A	DIM. B	MAX. DOOR OPENING
P3A	WITHOUT HOLDER	4"	10"	120°	1 1/4"	6 3/4"	180°

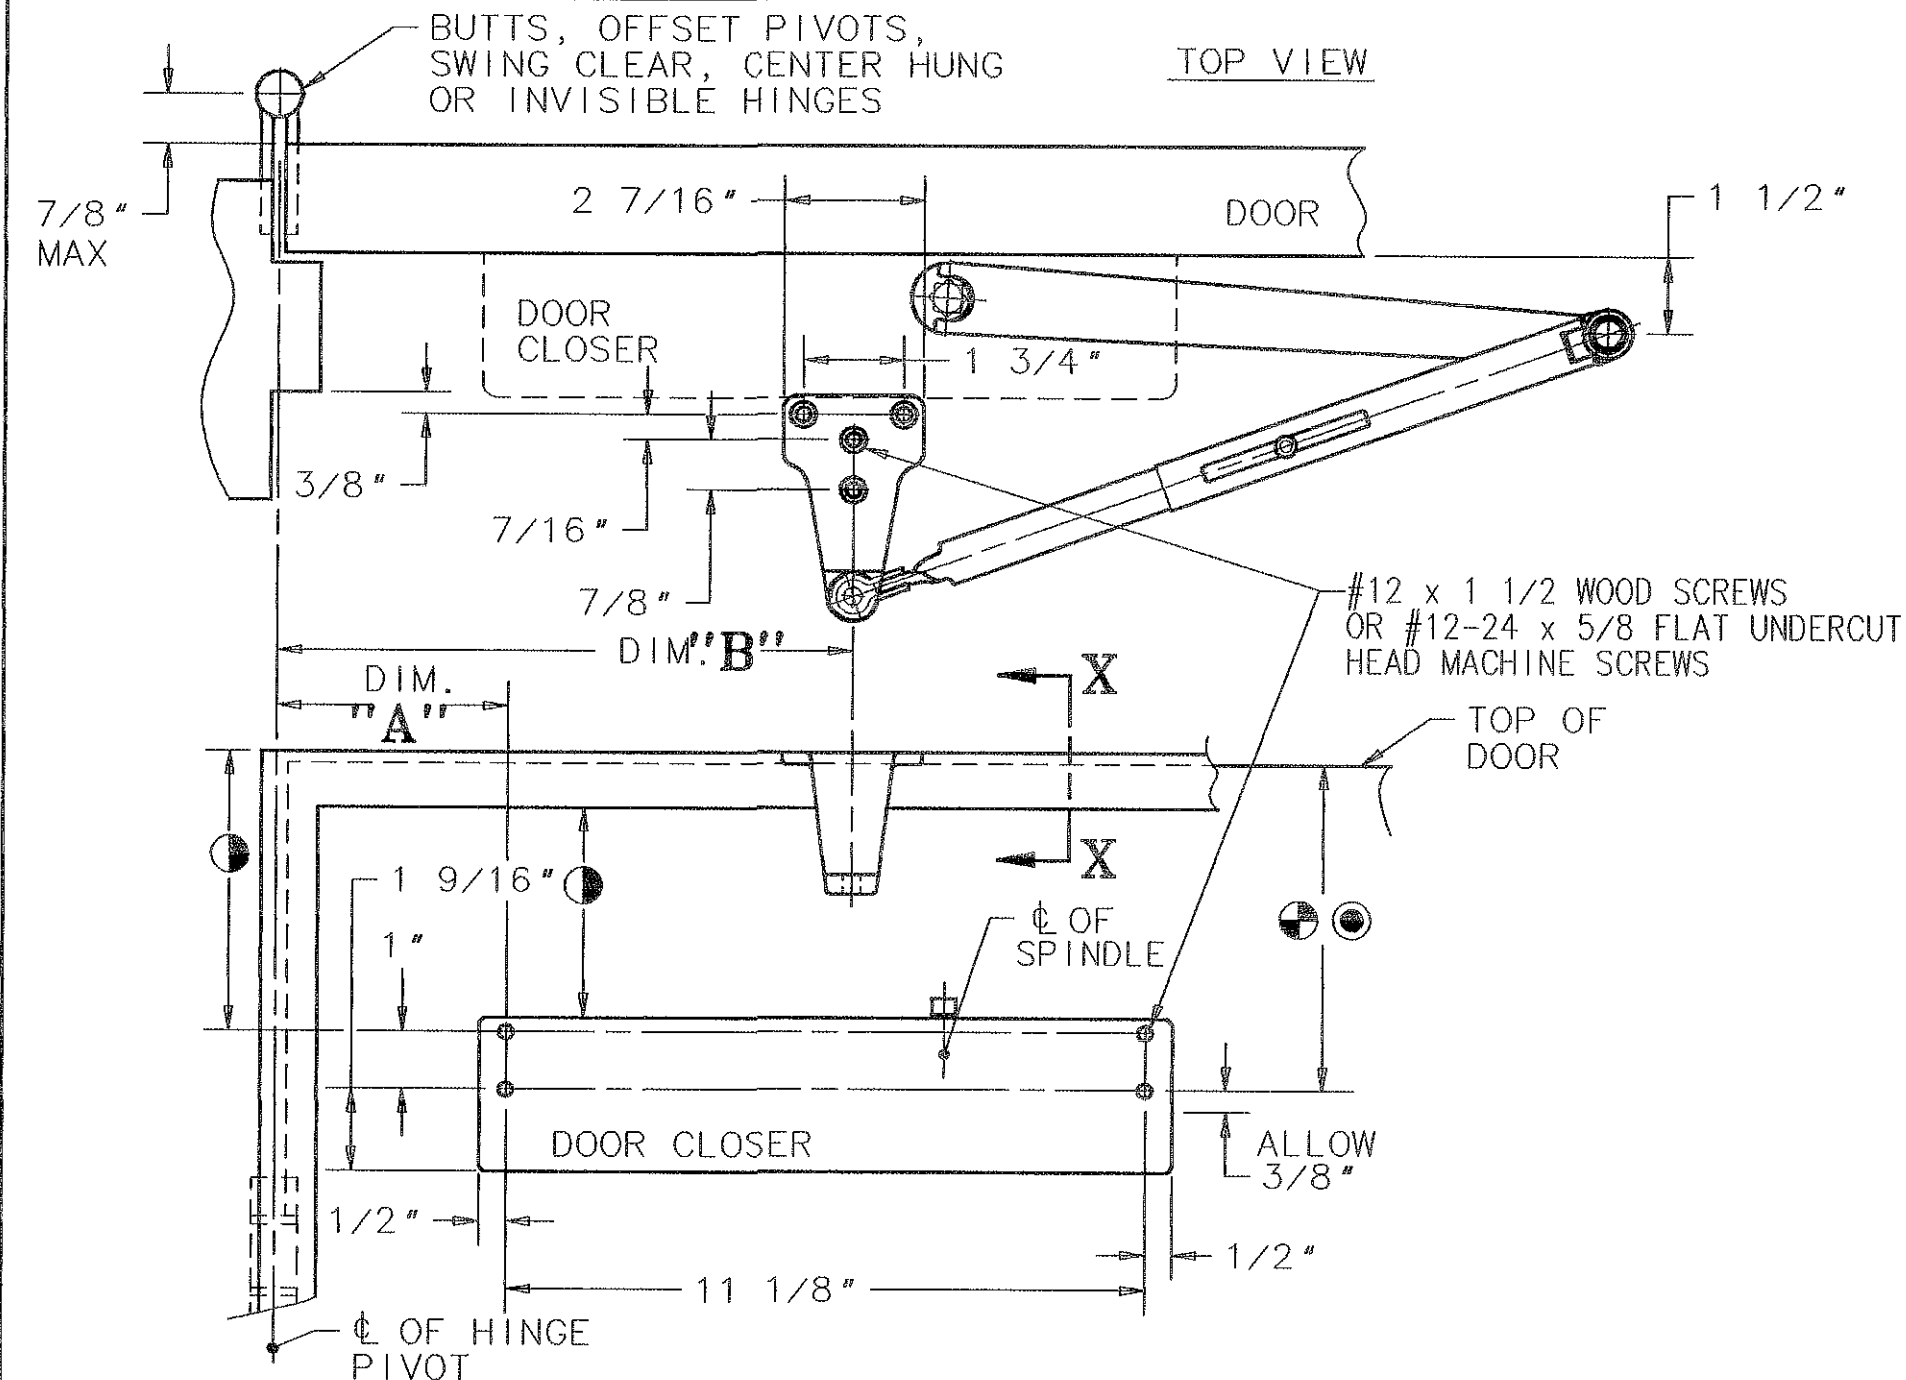

- ④ COORDINATOR APPLICATION SHOWN. USE SAME TEMPLATING FOR APPLIED STOPS WITH "SOUNDSEAL/SMOKE SEAL" FEATURES.
- ③ 1430-J COVER PLATE MAY BE USED WHEN CLOSER IS VIEWED THRU GLASS PANEL.
- ② LEFT HAND DOOR SHOWN. RIGHT HAND OPPOSITE.
- ① 12 GAUGE MIN. REINFORCEMENT REQUIRED FOR METAL DOORS & FRAMES.

- ⑥ SPACE REQUIRED TO MOUNT CLOSER ON TOP RAIL. ADD DIMENSIONS INVOLVED TO DETERMINE SPACE REQUIREMENTS. IF SPACE IS LESS THAN REQUIRED USE 1430 DROP BRACKET (DATA SHEET A7168).
- ⑤ SEE SECTION X-X FOR MOUNTING DIMENSIONS AND CORRECT POSITIONING OR LOCATION OF P3A FOOT BRACKET ON DOOR FRAME.

SARGENT MANUFACTURING COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET: 1430 SERIES PARALLEL ARM CLOSER WITH TYPE P3A ARM & DOOR FRAME WITH COORDINATOR MOUNTED ON STOP (ALSO FOR APPLIED STOPS)

EFFECTIVE DATE
12 JUN 98
TEMPLAT NO.
A7201 B