


IMPORTANT: USE ALTERNATE MOUNTING IF DOOR CAN OPEN BEYOND LIMITS SHOWN FOR STANDARD MOUNTING

ARM TYPE	DESCRIPTION	STANDARD MOUNTING			ALTERNATE MOUNTING		
		DIM. A	DIM. B	MAX. DOOR OPENING	DIM. A	DIM. B	MAX. DOOR OPENING
PF9	90°-180° HOLD OPEN FUSIBLE LINK	4"	9 1/2"	110°	1 1/4"	6 3/4"	180°

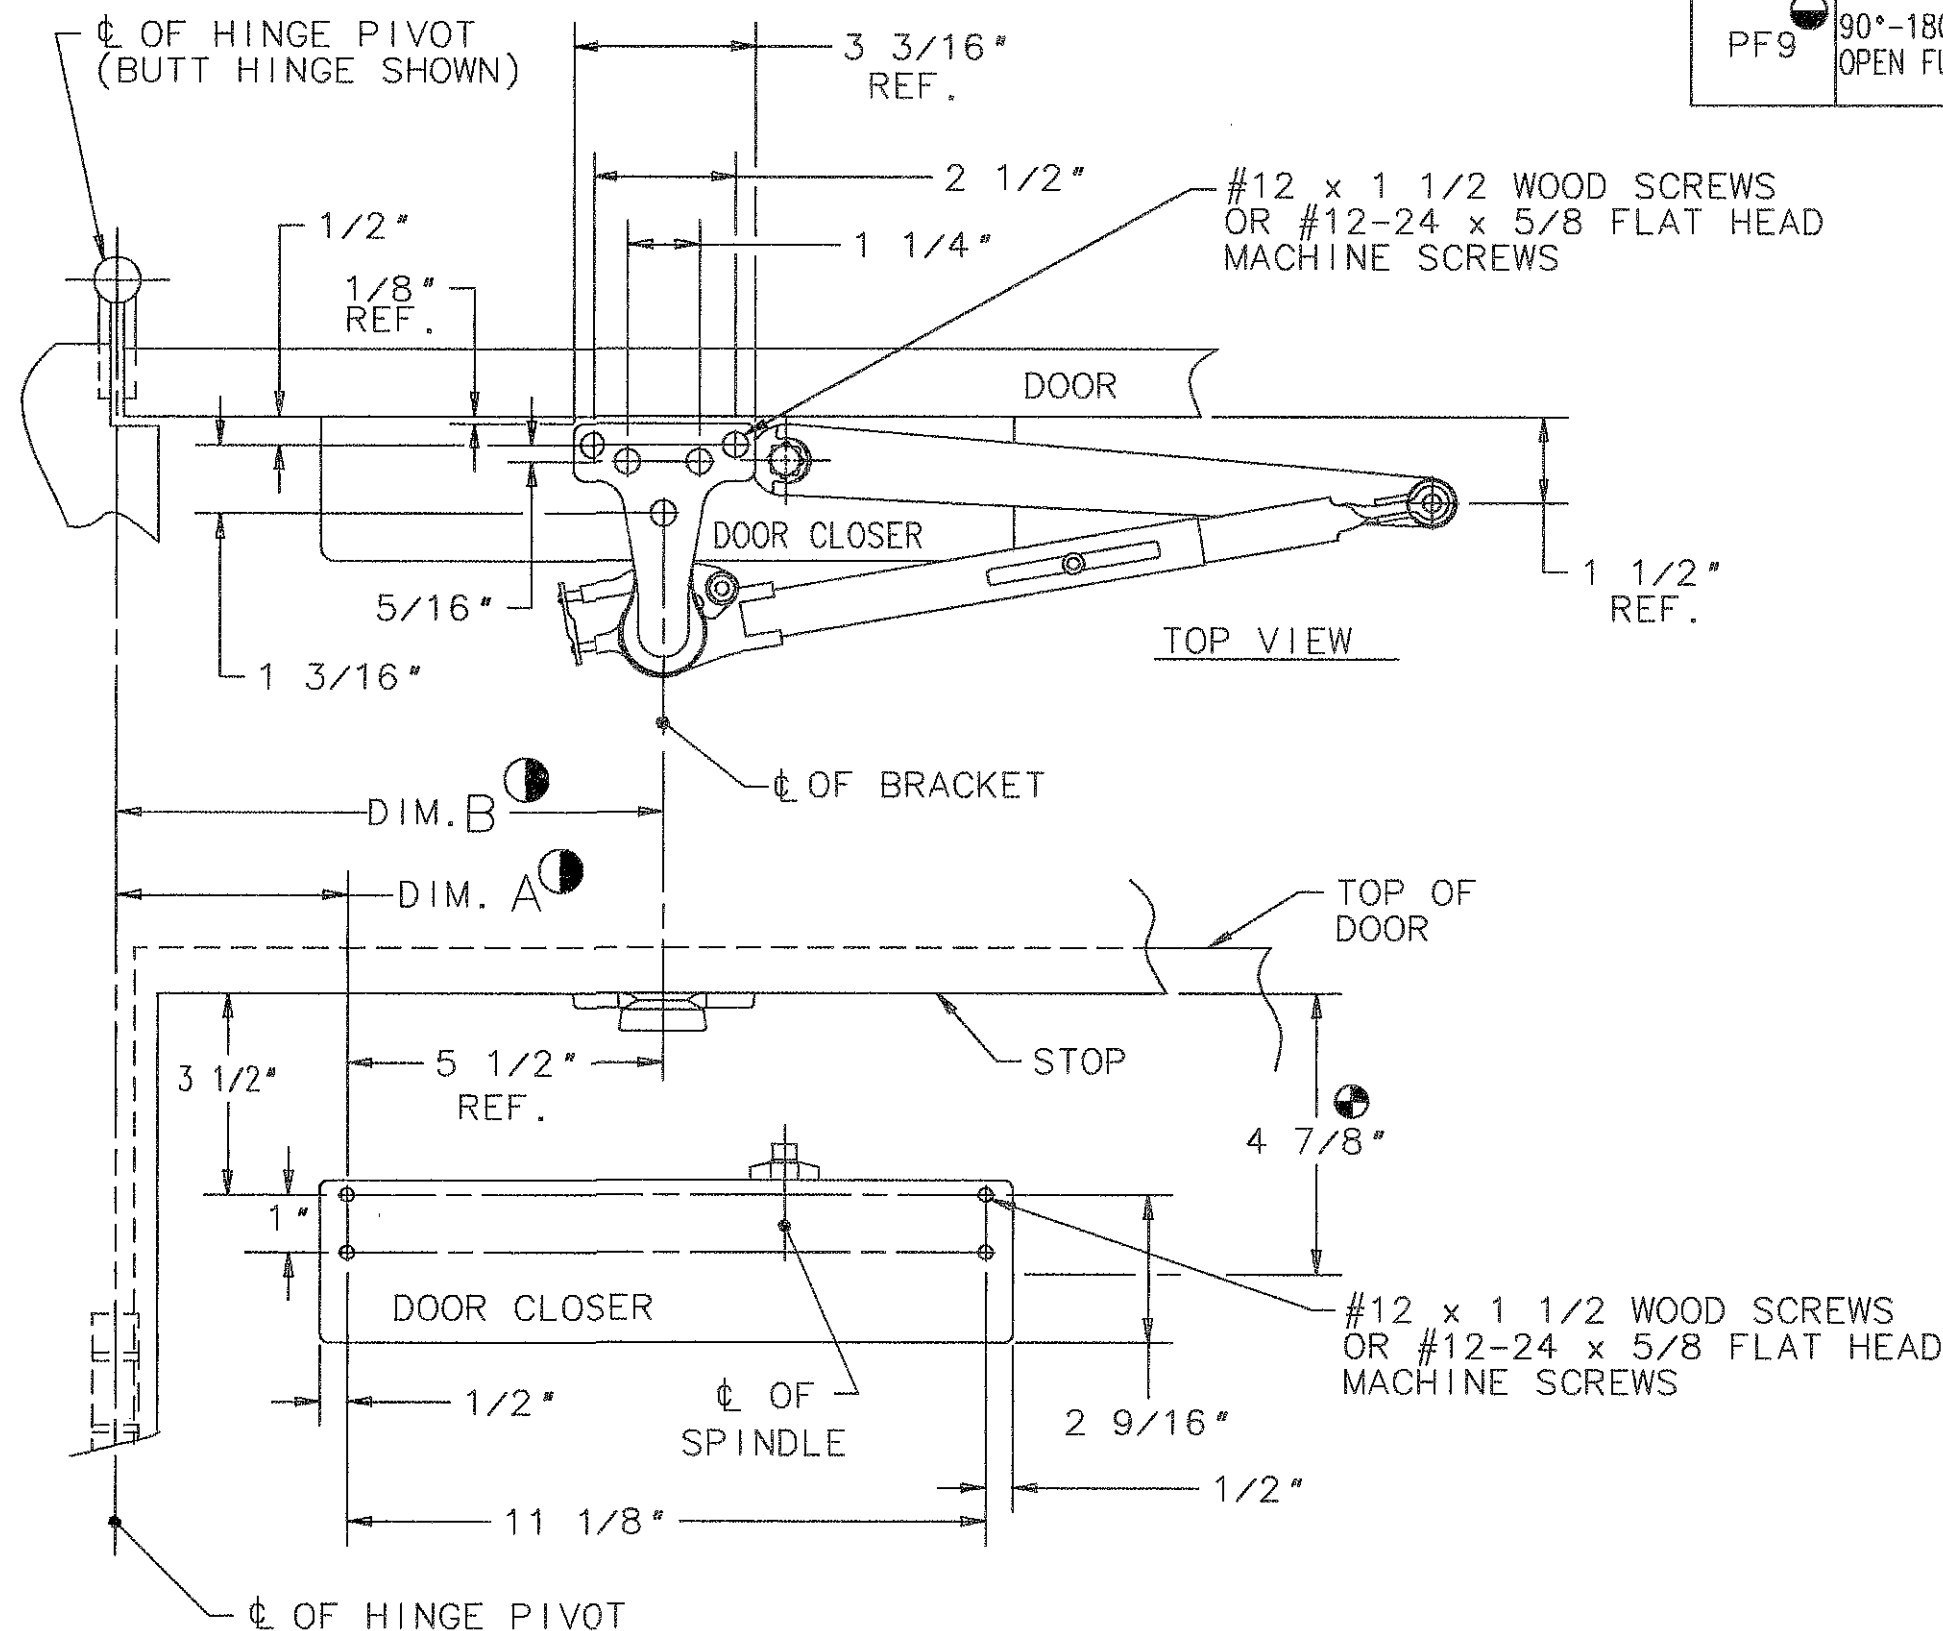

- ⑦ SPACE REQUIRED TO MOUNT CLOSER ON RAIL. IF SPACE IS LESS THAN SHOWN USE 1430-D DROP BRACKET.
- ⑥ THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.
- ⑤ 1430-J COVER PLATE MAY BE USED WHEN CLOSER IS VIEWED THRU GLASS PANEL.
- ④ FUSIBLE LINK ARM IS HANDED AND MUST BE THE SAME HAND AS DOOR.
- ③ DO NOT USE THIS MOUNTING FOR "SWING CLEAR" HINGES.
- ② LEFT HAND DOOR SHOWN, RIGHT HAND OPPOSITE.
- ① 12 GAUGE MIN. REINFORCEMENT REQUIRED FOR METAL DOORS & FRAMES.

SARGENT MANUFACTURING COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET: 1430 SERIES
CLOSER x PARALLEL ARM
APPLICATION-PF9 ARM

EFFECTIVE DATE

1 SEPT. 97

TEMPLATE NO.

A7120 A