
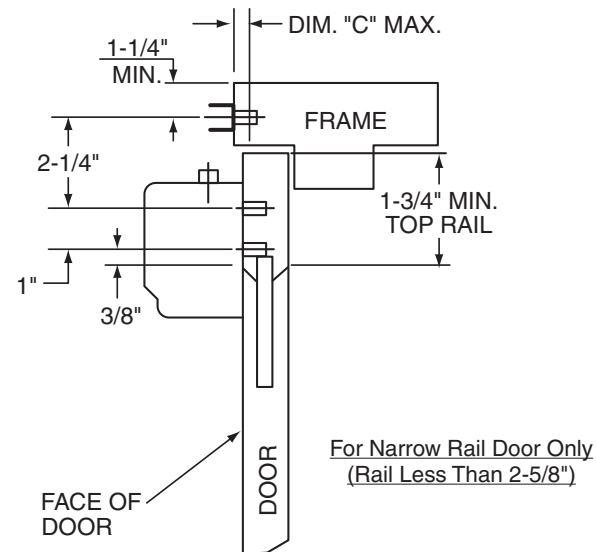


MAX DOOR OPENING	DIM. A	DIM. B
120°	6-3/4"	12-1/8"
160°**	4-3/4"	10-1/8"

**IF BUTT, FRAME AND WALL CONDITIONS PERMIT, DOOR WILL OPEN 180°


Notes:

1. 12 Gauge Min. Reinforcement Req'd for Metal Doors & Frames.
2. Right Hand Door Shown. Left Hand Opposite.
3. 1430 Cover Plate may be used when closer is viewed thru glass panel.

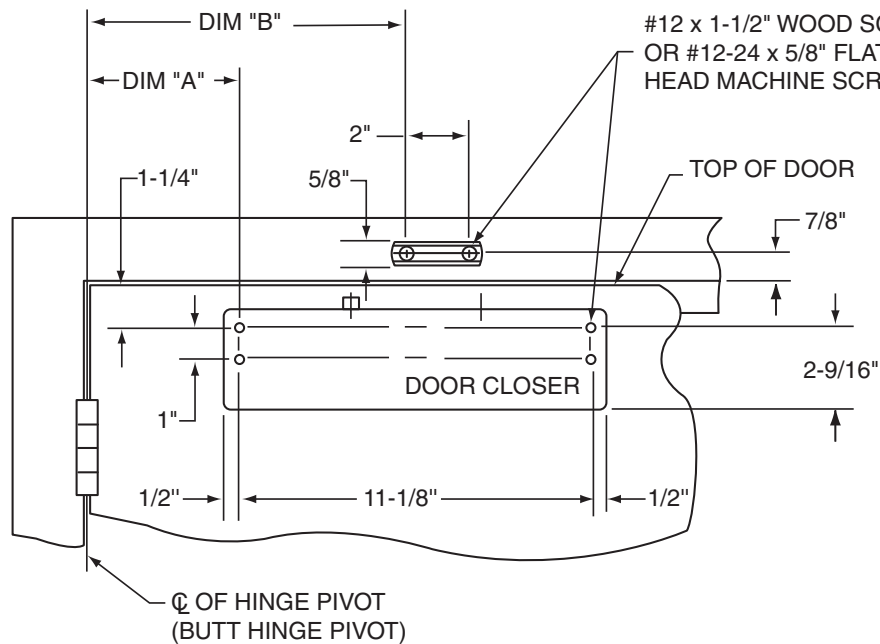

For Narrow Rail Door Only
(Rail Less Than 2-5/8")

1-1/2" MIN. SPACE
REQUIRED FOR ARM
CLEARANCE WHEN TOP
RAIL OF DOOR IS 2-5/8"
OR GREATER SEE ABOVE
FOR NARROW RAIL DOOR

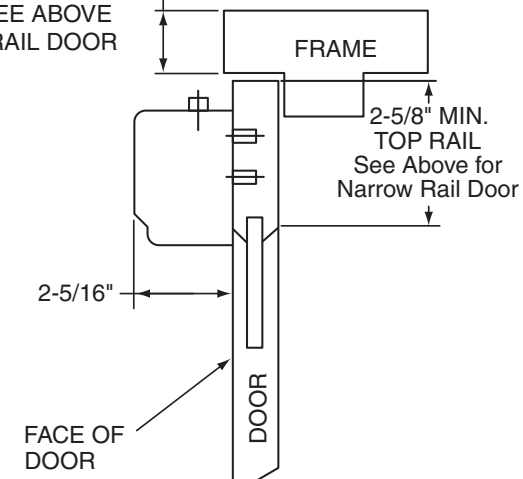

Frame Projection Permitted From Face of Door	
Top Door Rail Min.	Dim. "C"
2-5/8"	7/16"
2-1/8" - 2-9/16"	1/8"
1-3/4" - 2-1/16"	0

SARGENT
ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

Copyright © 2014, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.

1430 Series Closer
x Standard Arm
Hold Open
Fusible Link Application - "F"

DATE
03-14
TEMP NO.
A7129D