
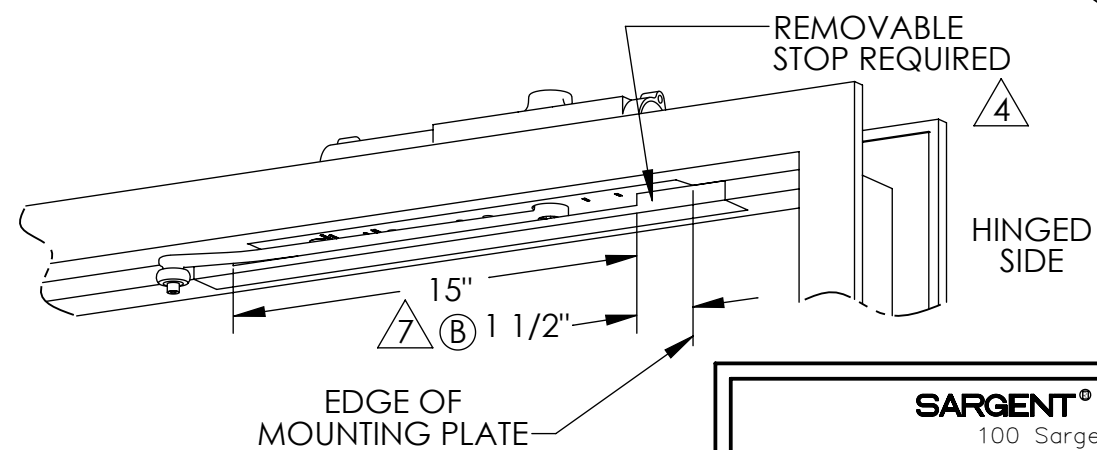
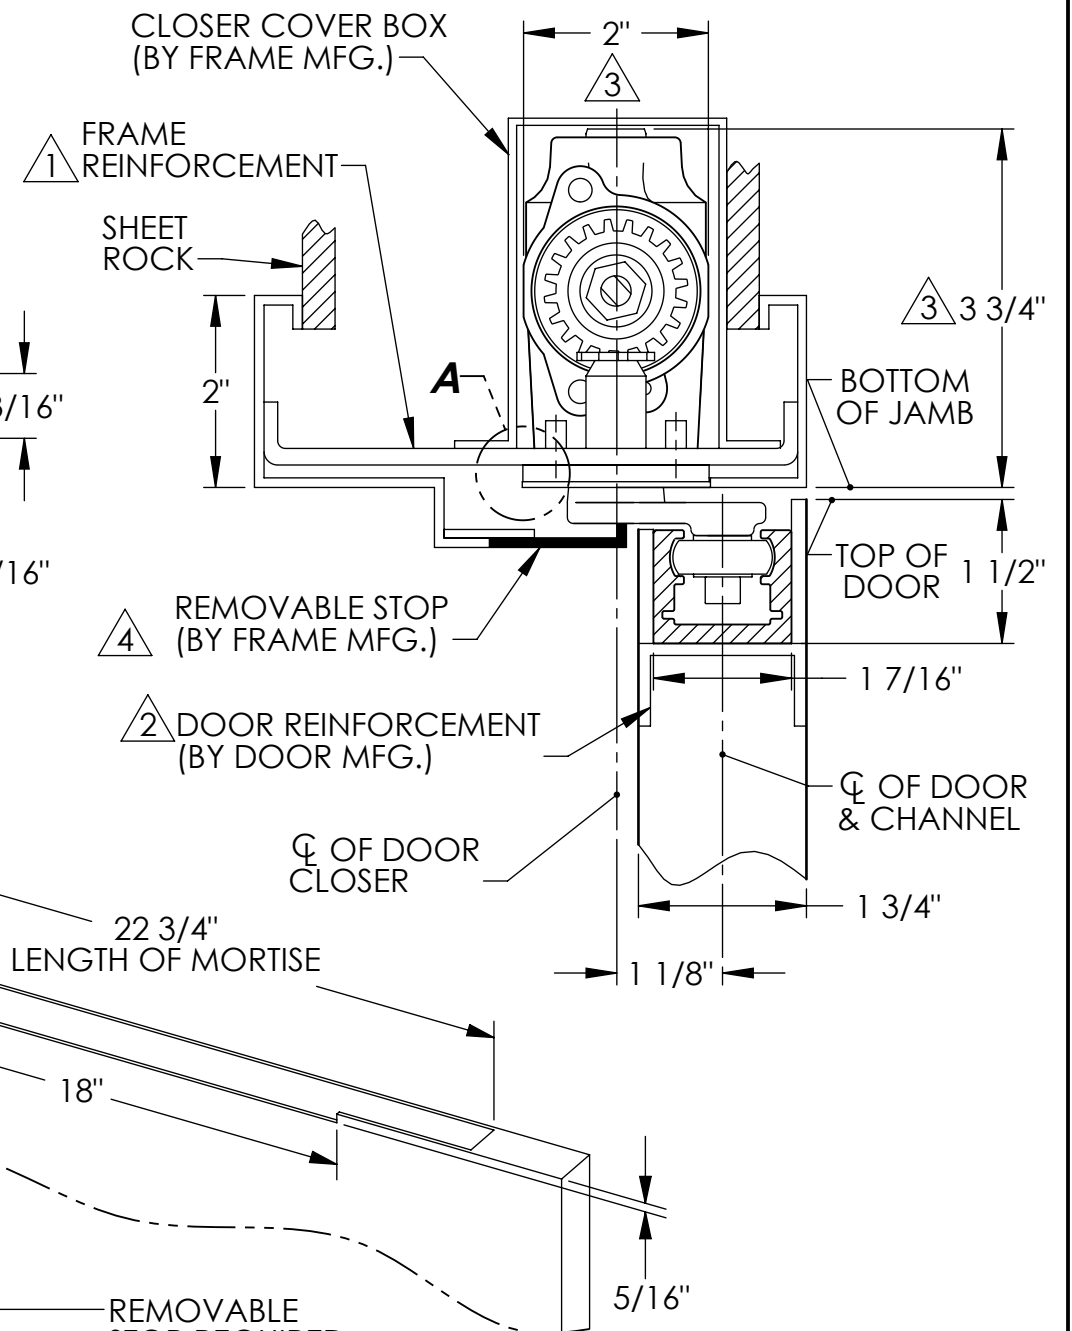
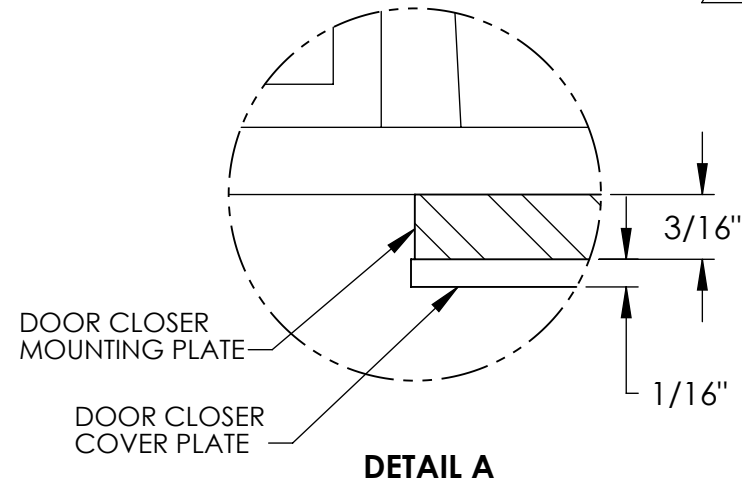
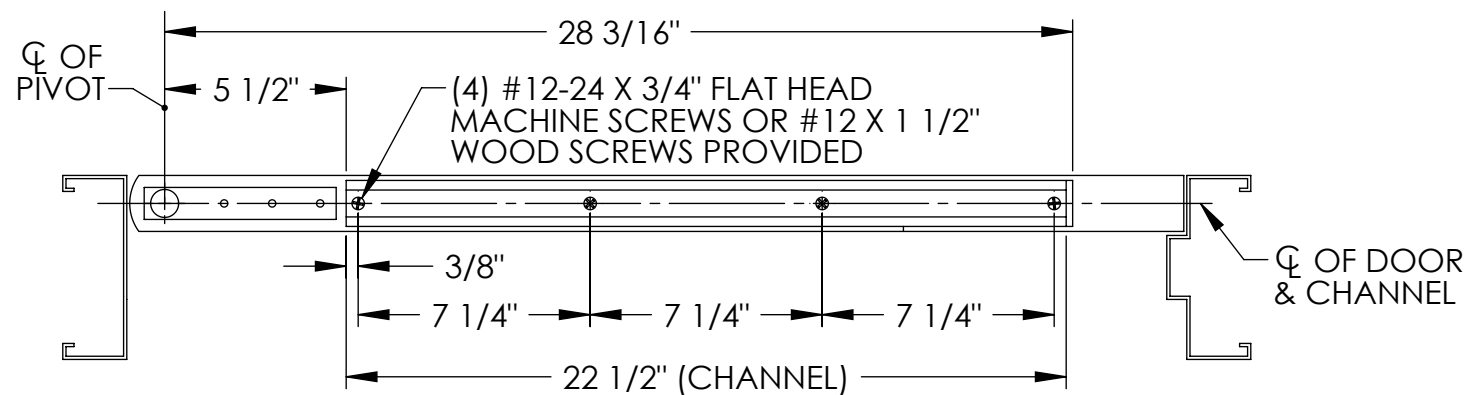
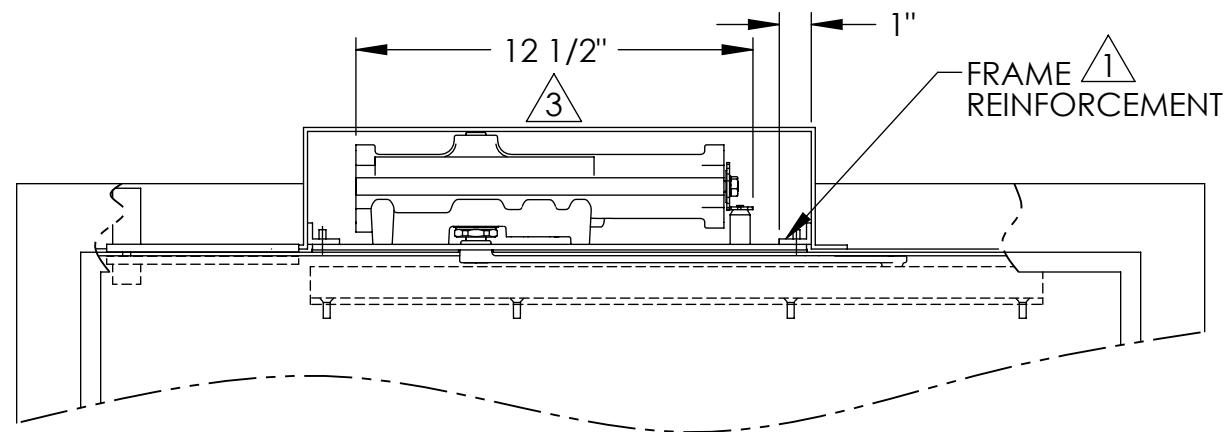


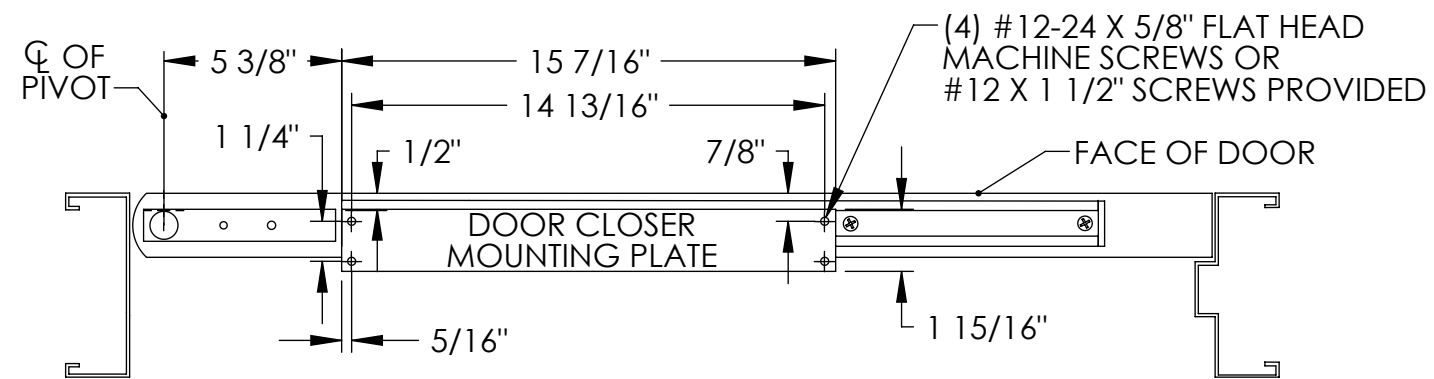

NOTES:

- 1 USE 7 GAUGE REINFORCEMENT FOR HOLLOW METAL FRAMES.
- 2 USE 12 GAUGE REINFORCEMENT FOR HOLLOW METAL DOORS.
- 3 MINIMUM OPENING REQUIRED FOR CLOSER BODY.
- 4 A SECTION OF THE STOP BELOW CLOSER MUST BE REMOVABLE, CONSULT FACTORY FOR AN ALTERNATE FRAME CONFIGURATION FOR A 2" DOOR THAT DOES NOT REQUIRE A REMOVEABLE STOP.
- 5 MAXIMUM DEGREE OF OPENING 100°.
- 6 LEFT HAND DOOR AND CLOSER SHOWN, RIGHT HAND OPPOSITE.
- 7 A SECTION OF THE REMOVEABLE STOP MUST BE LEFT OPEN FOR ARM CLEARANCE.

SARGENT® Manufacturing Company
100 Sargent Drive New Haven, CT 06511

DATA SHEET:
269 OVERHEAD CONCEALED CLOSER
WITH CENTER HUNG PIVOT,
1 3/4" DOOR AND 2" FACE FRAME

RELEASE DATE
FEB-4-2013
TEMPLATE NO.
A7987