
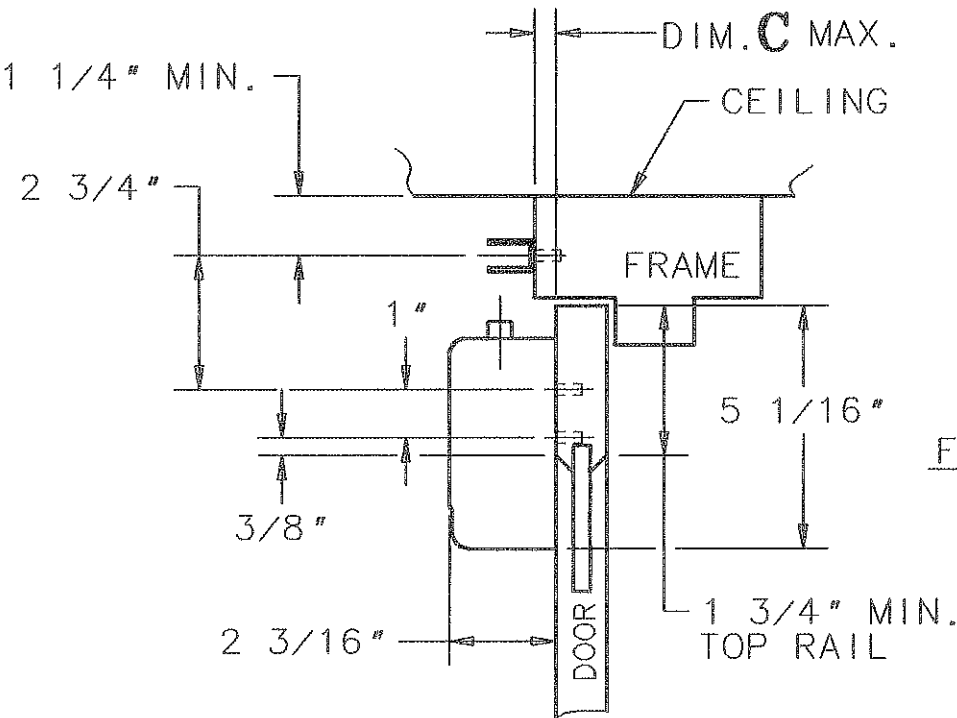



IMPORTANT: USE ALTERNATE MOUNTING IF DOOR CAN OPEN BEYOND LIMITS SHOWN FOR STANDARD MOUNTING

ARM TYPE	MOUNTING	MAX. DOOR OPENING	DIM. A	DIM. B
HOLD OPEN FUSIBLE LINK	STANDARD	110°	7"	12 1/8"
	ALTERNATE	135°	5"	10 1/8"

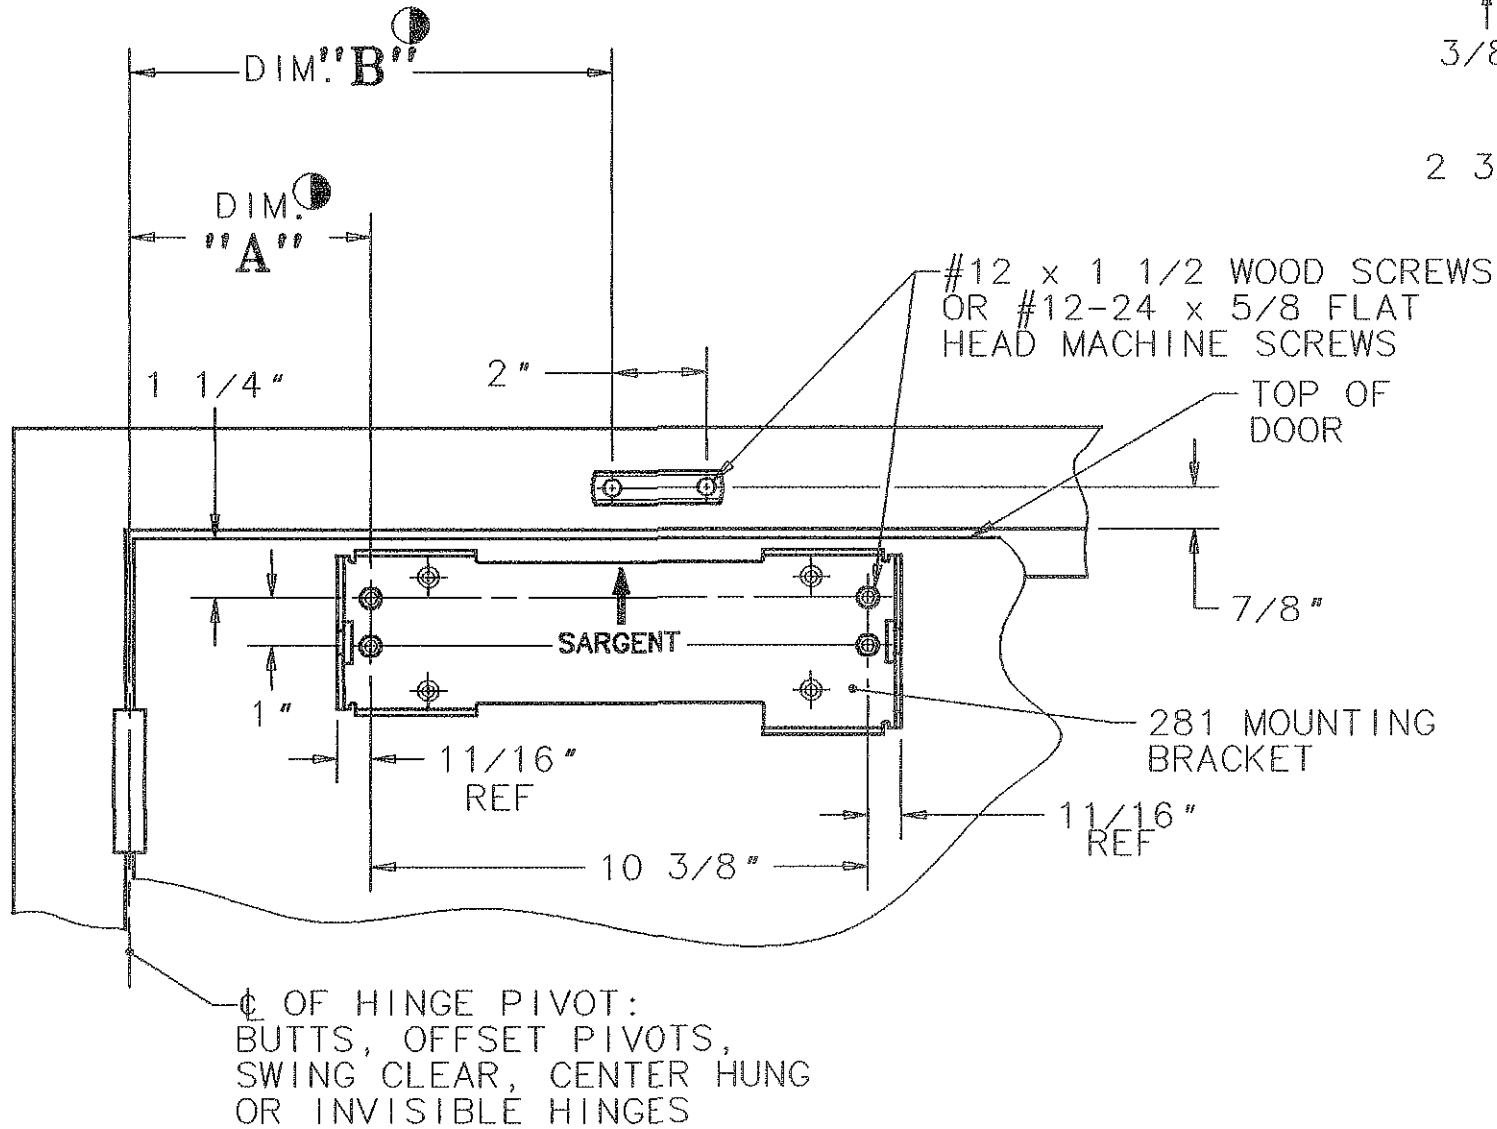

FOR NARROW RAIL DOOR ONLY
(RAIL LESS THAN 2 5/8)

FRAME PROJECTION PERMITTED FROM FACE OF DOOR	
TOP DOOR RAIL MIN.	DIM. C
2 5/8	7/16
2 1/8 - 2 9/16	1/8
1 3/4 - 2 1/16	0

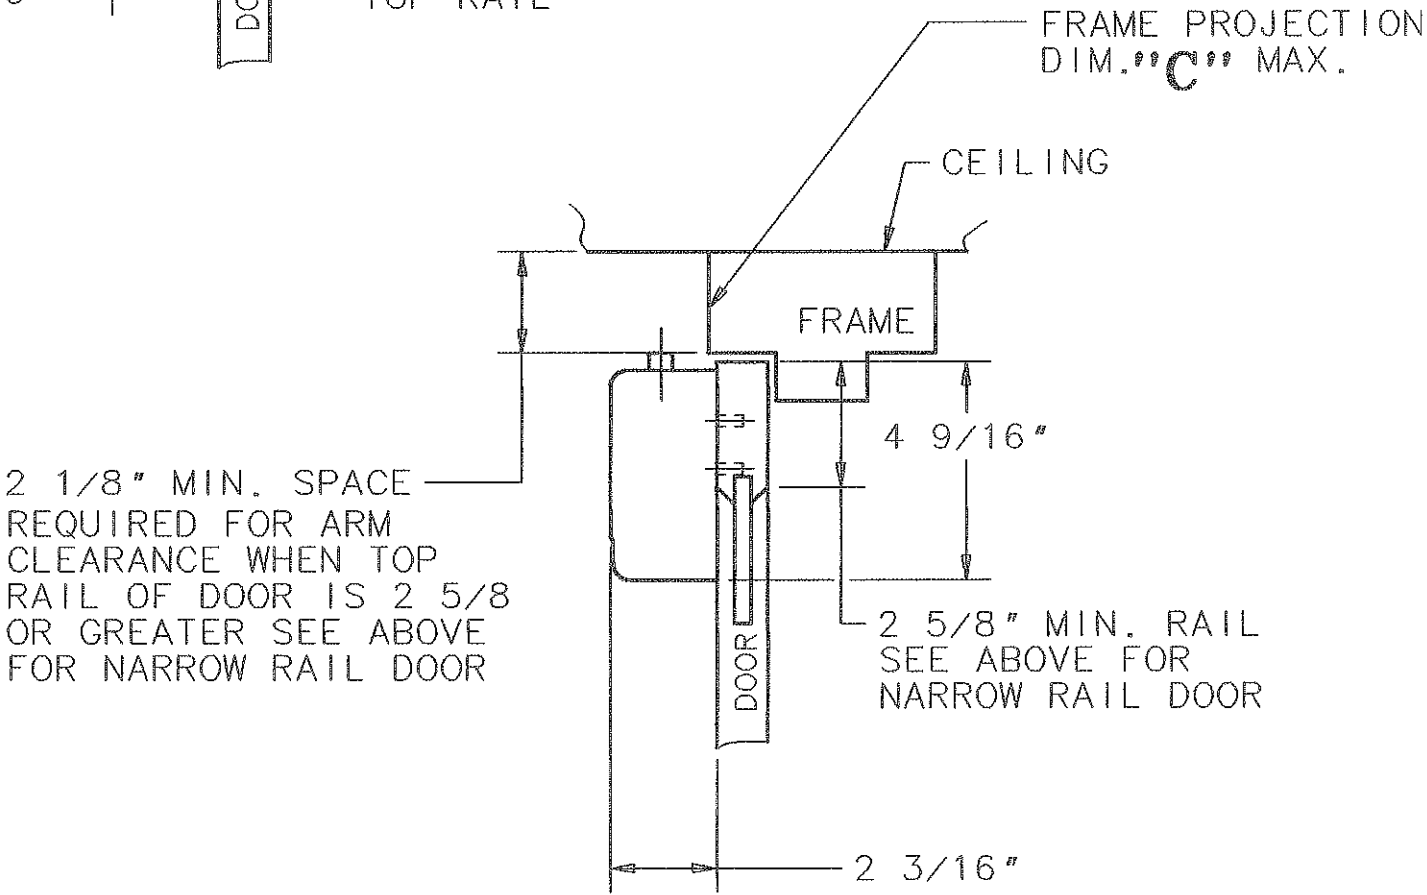

- ③ THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.
- ② RIGHT HAND DOOR SHOWN. LEFT HAND DOOR OPPOSITE.
- ① 12 GAUGE MIN. REINFORCEMENT REQ'D. FOR METAL DOORS & FRAMES.

SARGENT MANUFACTURING COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET: 281
SERIES CLOSER x STANDARD ARM
HOLD OPEN FUSIBLE LINK
APPLICATION - "F"

EFFECTIVE DATE
DEC. 98
TEMPLET NO. A7236 A