
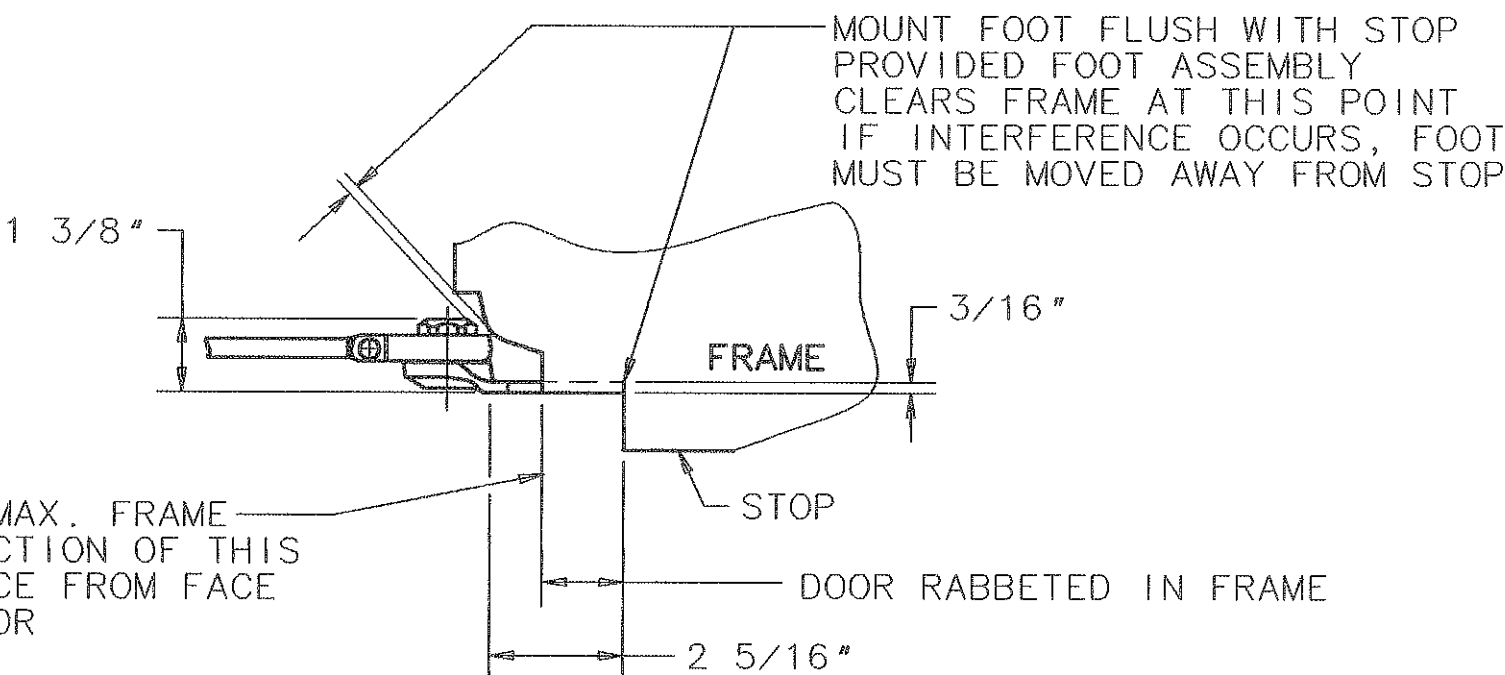


IMPORTANT: USE ALTERNATE MOUNTING IF DOOR CAN OPEN BEYOND LIMITS SHOWN FOR STANDARD MOUNTING

ARM TYPE	DESCRIPTION	STANDARD MOUNT		ALTERNATE MOUNT	
		DIM. A	MAXIMUM DOOR OPENING	DIM. A	MAXIMUM DOOR OPENING
H8	90°-180° HOLD OPEN ARM	7 3/4"	105°	4 1/2"	160°

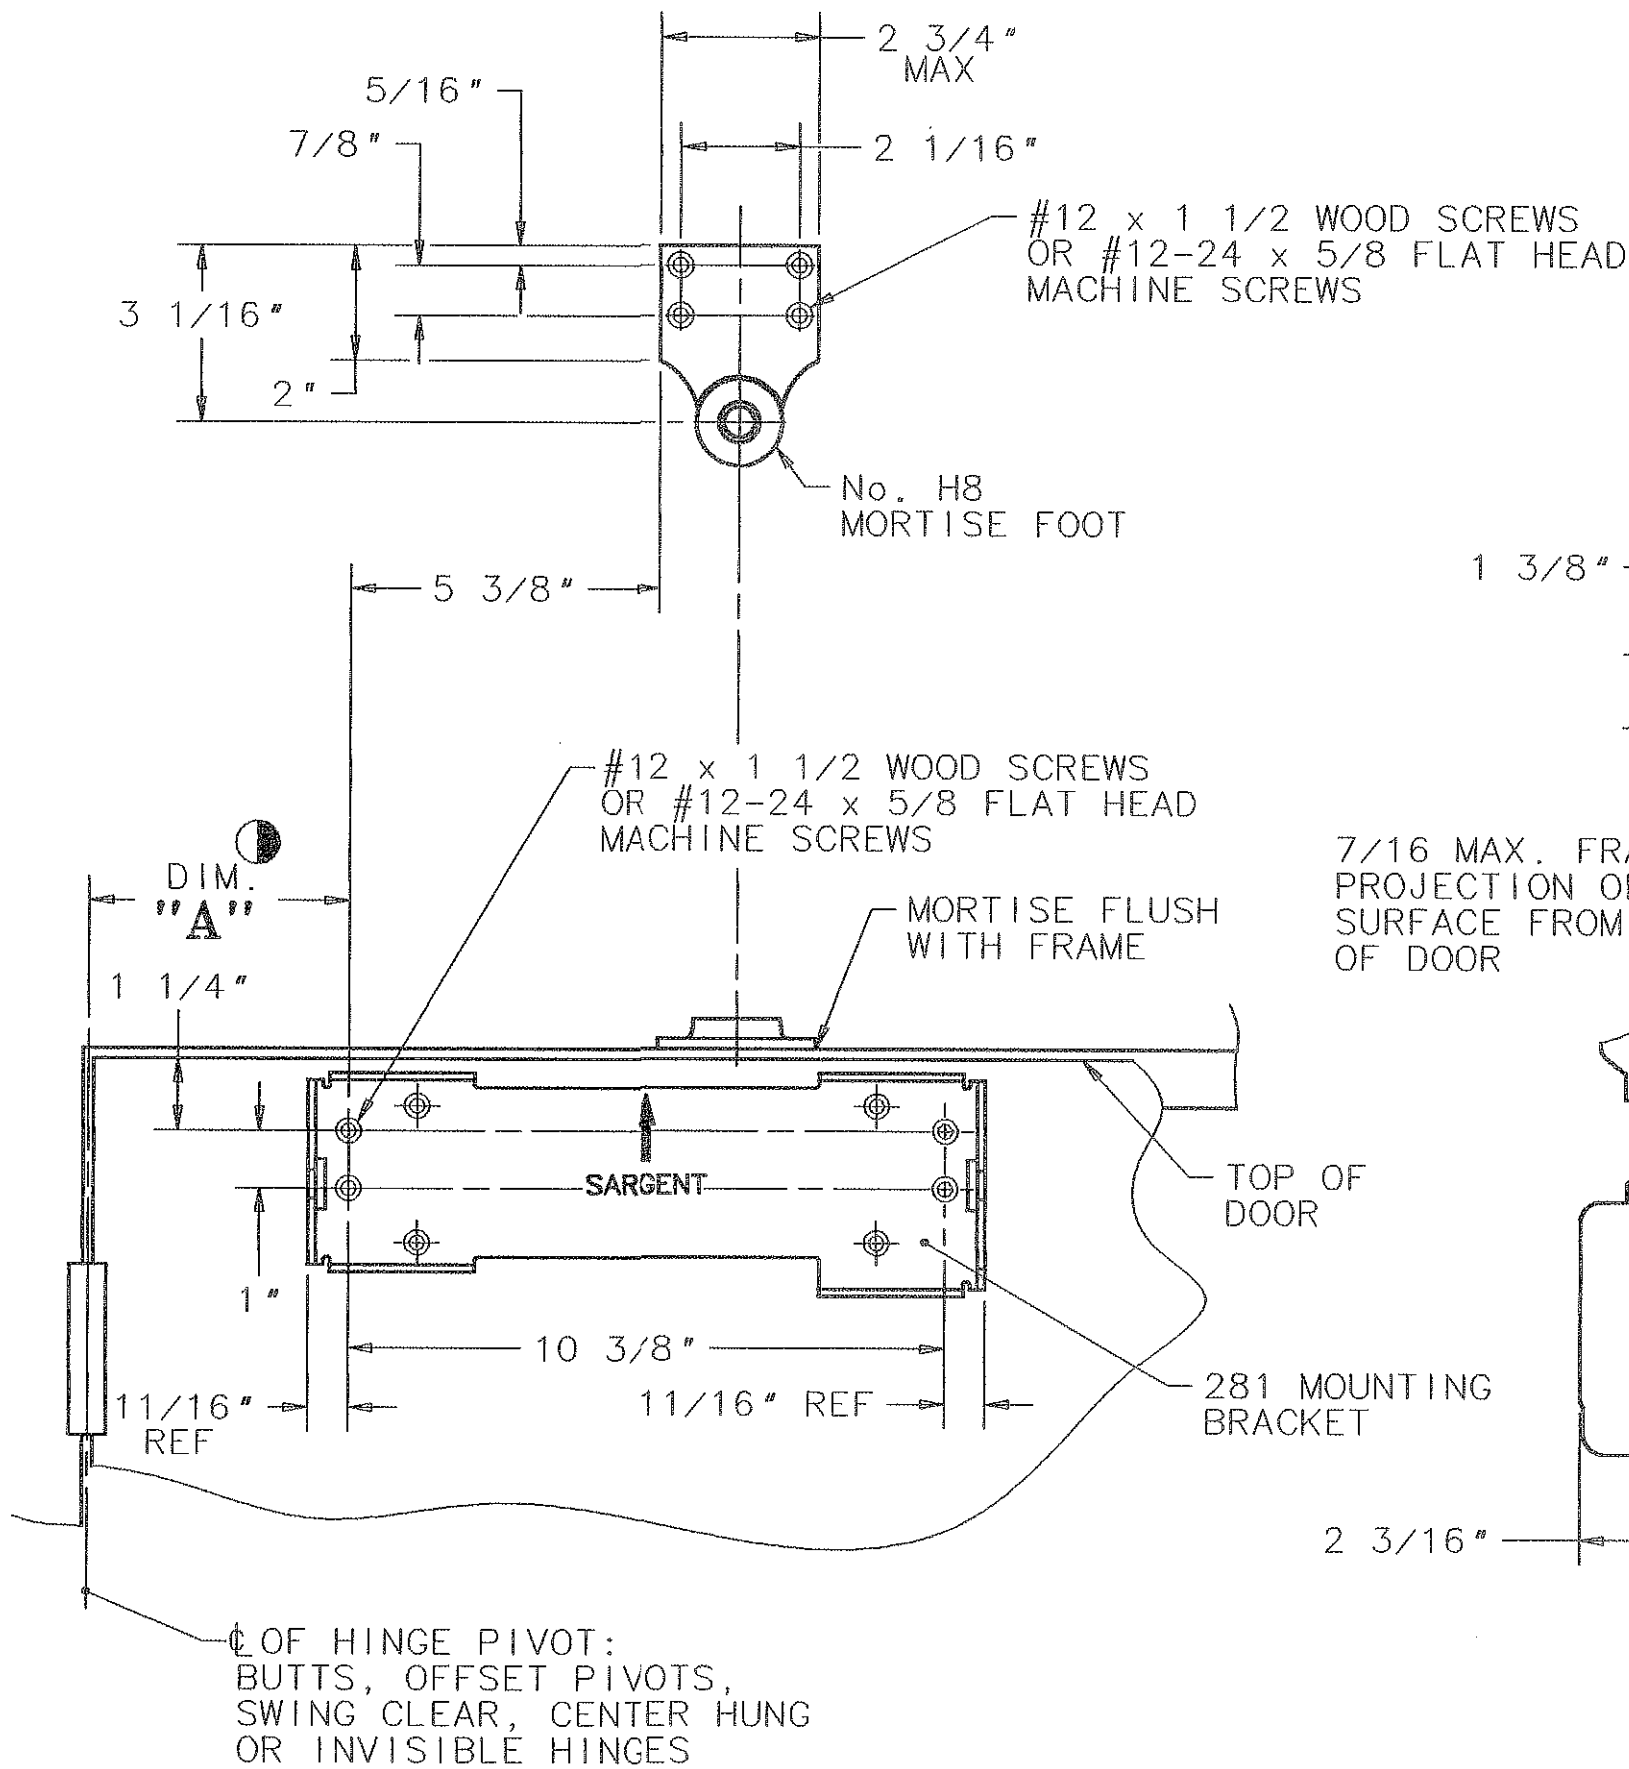

- ④ THIS DIMENSION IS TAKEN FROM HINGE
EDGE OF DOOR FOR INVISIBLE HINGES.
- ③ IF BUTT, FRAME AND WALL CONDITIONS PERMIT,
CLOSER WILL ALLOW DOOR TO OPEN 180°.
- ② RIGHT HAND DOOR SHOWN. LEFT
HAND DOOR OPPOSITE.
- ① 12 GAUGE MIN. REINFORCEMENT
REQUIRED FOR METAL DOORS & FRAMES.

SARGENT MANUFACTURING COMPANY NEW HAVEN, CONN. 06511

DATA SHEET: 281 SERIES
CLOSER x STANDARD
ARM APPLICATION -H8 ARM

EFFECTIVE DATE
DEC. 98
TEMPLET NO. A7233 A