

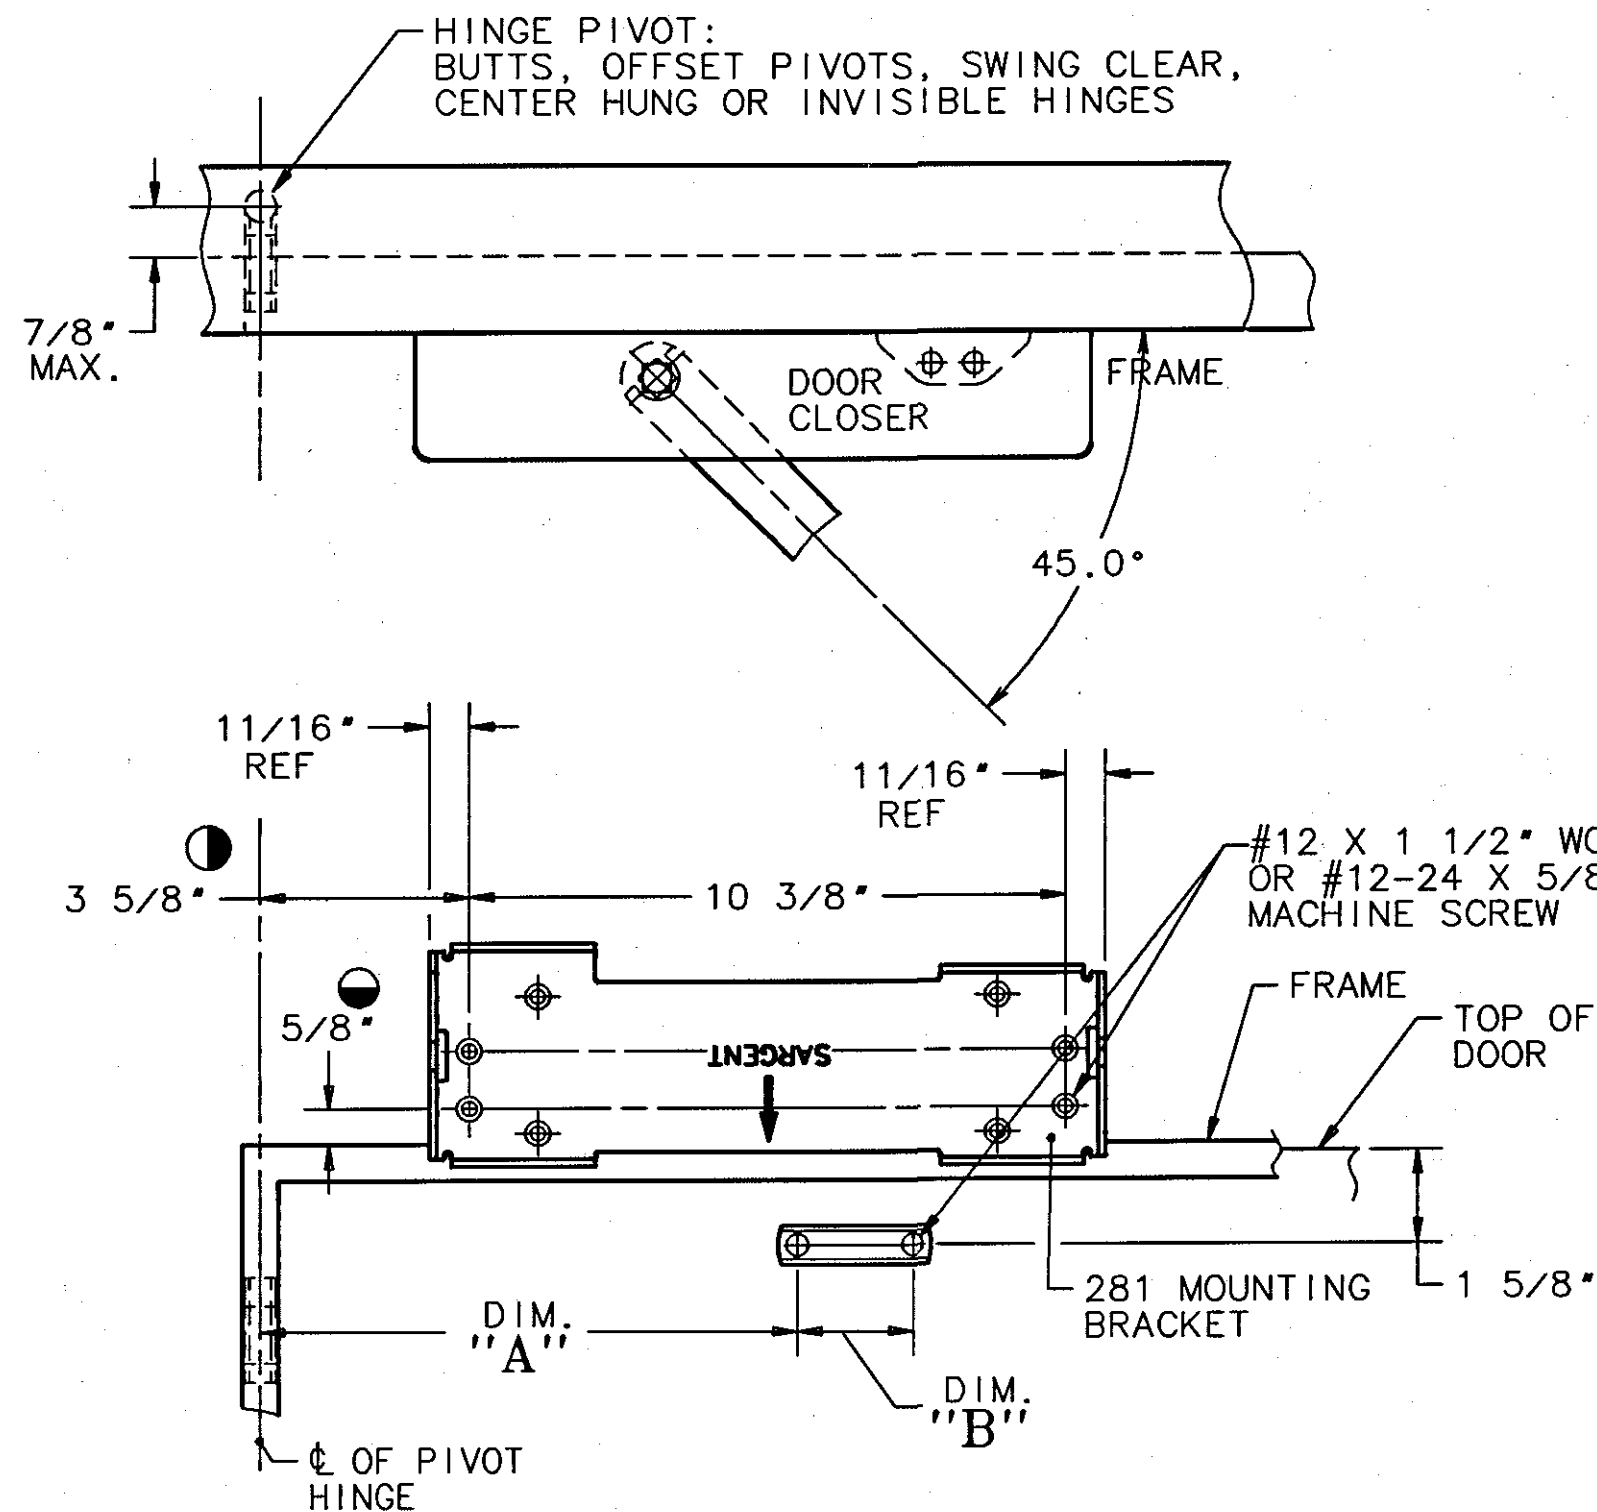


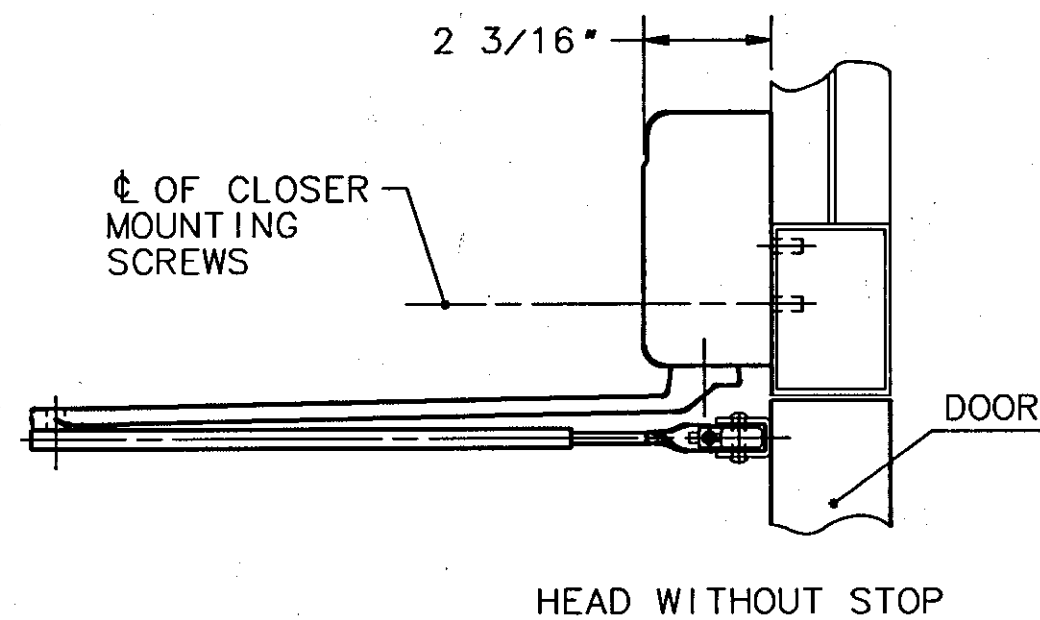

FOR FLASH HEADER ONLY

TYPE ARM	DIM. "A"	DIM. "B"	DIM. "C"	MAX. DOOR OPENING	RANGE OF HOLD OPEN
O	13 3/4"	2"	11/16"	90°	
	12 1/4"			110°	
	8 3/4"			180°	
F	13 3/4"	2"	11/16"	90°	80°-90°
	12 1/4"			110°	80°-110°
	8 3/4"			140°	80°-130°
H	13 5/8"	2 1/2"	1 1/8"	90°	80°-90°
	12"			110°	80°-110°
	8 1/2"			180°	80°-180°

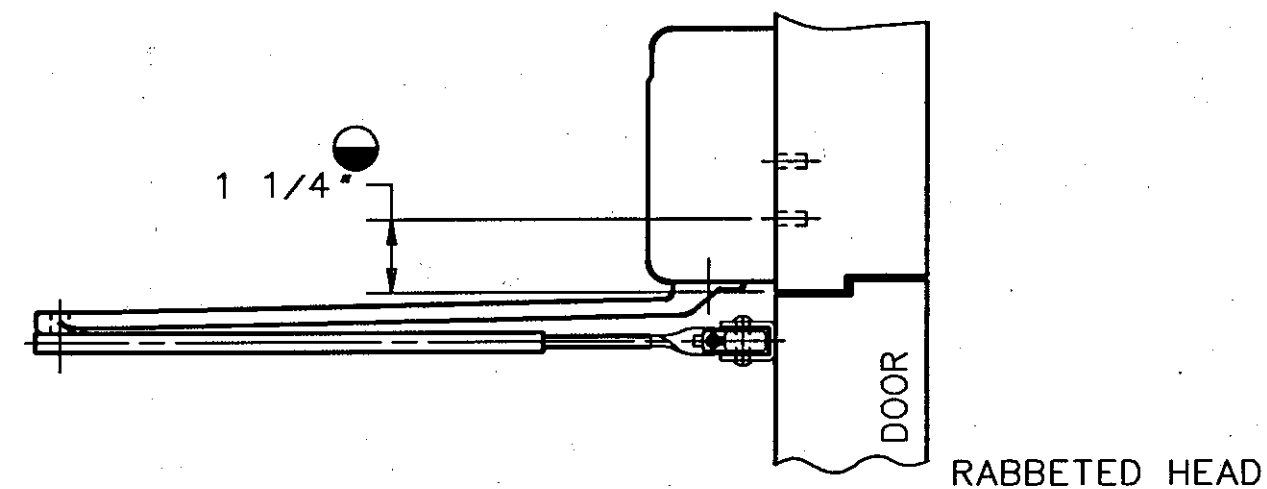

- ③ LEFT HAND DOOR SHOWN, RIGHT HAND DOOR OPPOSITE.
- ② MAXIMUM DOOR OPENINGS SHOWN IN CHARTS APPLY TO DOORS UP TO 2 1/4" THICK ONLY.
- ① 12 GAUGE MIN. REINFORCEMENTS REQUIRED FOR METAL DOORS AND FRAMES.

- ⑤ THESE DIMENSIONS MAYBE REDUCED TO 3/8" MIN. IF RAIL ON TOP CASING IS NARROW OR LOW CEILING CONDITION EXISTS. CLOSER FOOT SHOULD BE MOVED ACCORDINGLY.
- ④ THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.

SARGENT MANUFACTURING COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET: 281
SERIES CLOSER x TOP JAMB
APPLICATION - O, H & F ARMS
FOR FLASH HEADER

EFFECTIVE DATE

JAN 00

TEMPLET NO.

A7428 A