
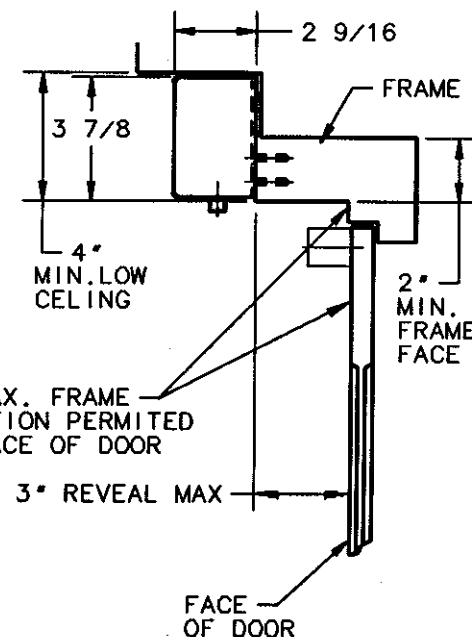


DESCRIPTION	MODEL No.	MAXIMUM DOOR OPENING	RANGE OF HOLD OPEN	REMARKS
MULTI-POINT HOLD-OPEN CLOSER-HOLDER FIREGUARD	2970 9-2970 12-2970	180°	10° TO 170°	TRACK ARM DOUBLE EGRESS

IMPORTANT- IF MORTISE NUTS ARE USED TO MOUNT THE DOOR TRACK THE TWO MORTISE NUT HEADS MUST BE RECESSED FLUSH WITH THE DOOR SURFACE. THIS WILL PREVENT AN INTERFERENCE AT THE "STOP" WHEN THE DOOR IS CLOSED. FOR METAL DOORS THE RECESS PREPARATION MUST BE MADE BY THE DOOR MANUFACTURER.

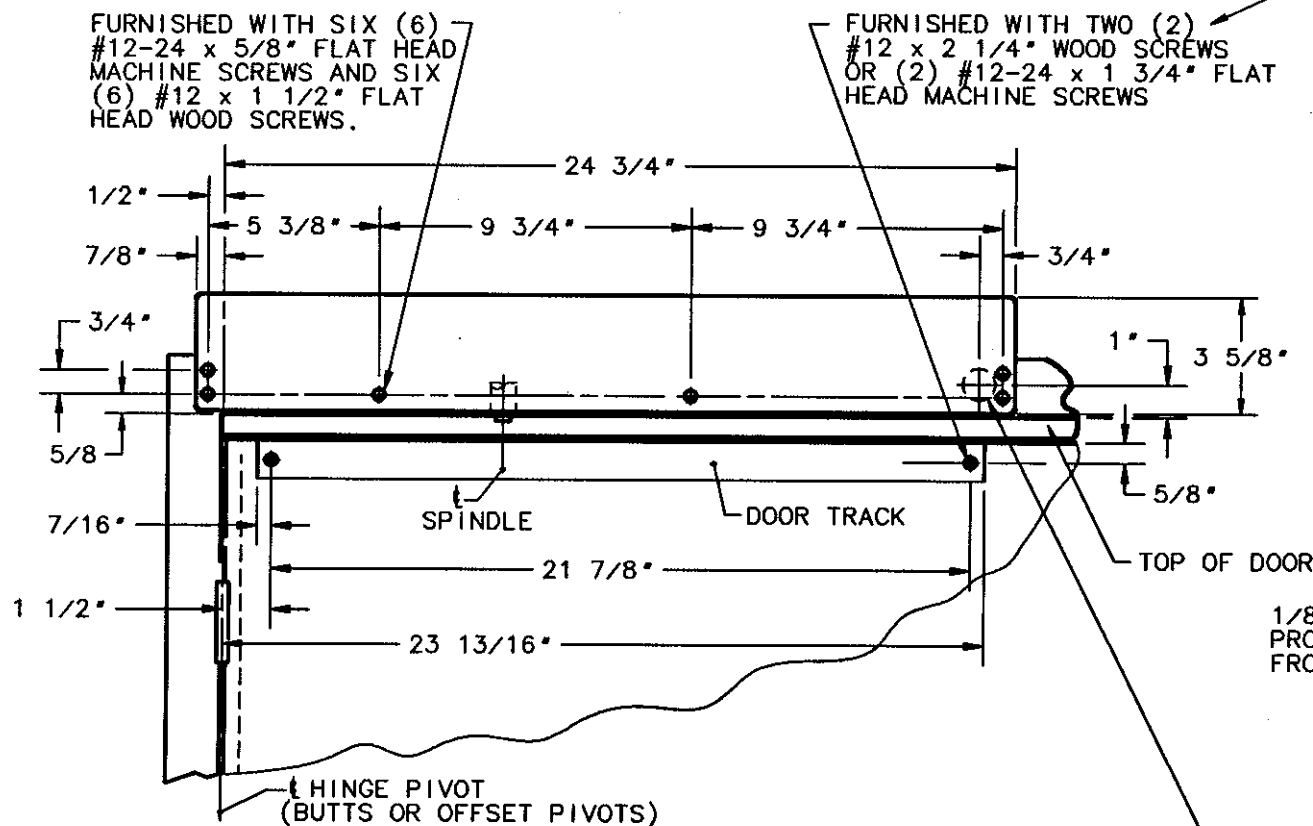

② RIGHT HAND DOOR SHOWN.
LEFT HAND OPPOSITE.

① 12 GAUGE MIN. REINFORCEMENTS REQUIRED
FOR METAL DOORS AND FRAMES.

FOR CONCEALED WIRING ONLY:
1 1/8" DIA. HOLE IS REQUIRED
FOR 3/4" CONDUIT FITTING.
IT IS IMPORTANT THAT SPACE
BE PROVIDED WITHIN THE FRAME
FOR THE CONDUIT.

SARGENT MFG. COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET:
2900 SERIES FIREGUARD PULL MOUNTING
MODELS: 2970, 9-2970 & 12-2970
DOUBLE EGRESS SLIDING ARM

RELEASE DATE
OCTOBER 99

TEMPLATE NO. A7360