
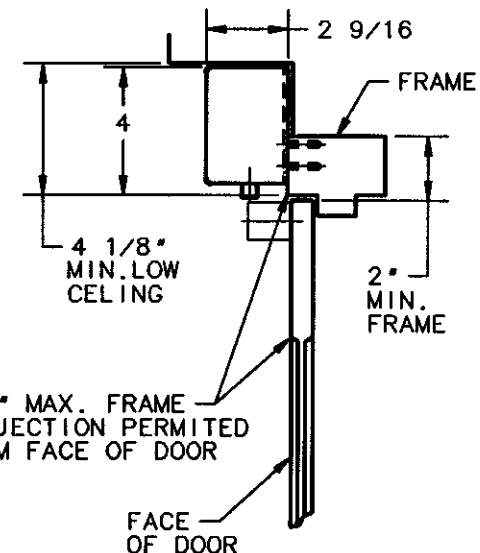


DESCRIPTION	MODEL No.	MAXIMUM DOOR OPENING	RANGE OF HOLD OPEN	REMARKS
MULTI-POINT HOLD-OPEN CLOSER-HOLDER FIREGUARD	2960, 9-2960 & 12-2960	180°	10° TO 170°	SLIDE ARM (RIGID)
	2980, 9-2980 & 12-2980			SLIDE ARM (SWING FREE)

IMPORTANT- IF MORTISE NUTS ARE USED TO MOUNT THE DOOR TRACK THE TWO MORTISE NUT HEADS MUST BE RECESSED FLUSH WITH THE DOOR SURFACE. THIS WILL PREVENT AN INTERFERENCE AT THE "STOP" WHEN THE DOOR IS CLOSED. FOR METAL DOORS THE RECESS PREPARATION MUST BE MADE BY THE DOOR MANUFACTURER.

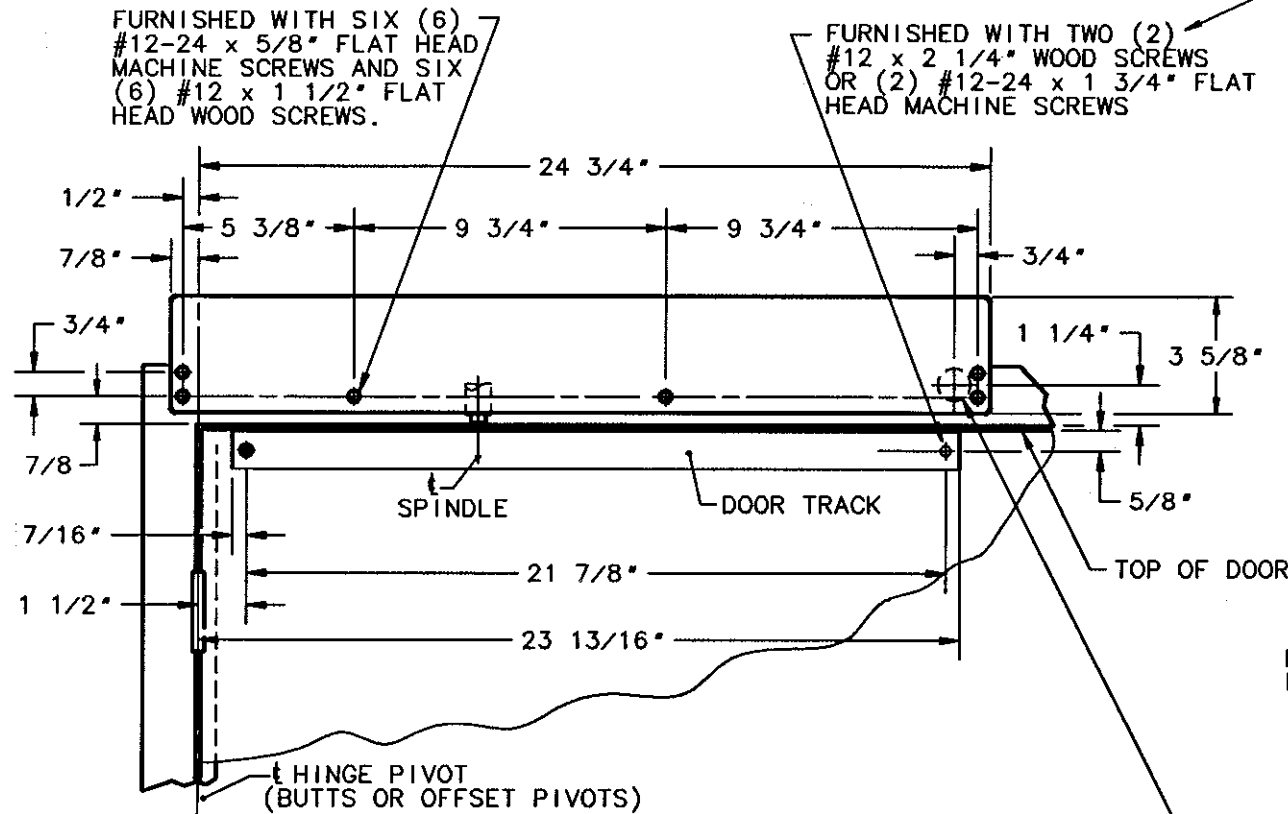

- ② RIGHT HAND DOOR SHOWN.
LEFT HAND OPPOSITE.
- ① 12 GAUGE MIN. REINFORCEMENTS REQUIRED
FOR METAL DOORS AND FRAMES.

FOR CONCEALED WIRING ONLY:
1 1/8" DIA. HOLE IS REQUIRED
FOR 3/4" CONDUIT FITTING.
IT IS IMPORTANT THAT SPACE
BE PROVIDED WITHIN THE FRAME
FOR THE CONDUIT.

SARGENT WFO. COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET:
2900 SERIES FIREGUARD PULL MOUNTING
MODELS: 2960, 9-2960 & 12-2960
(RIGID SLIDE ARMS) 2980, 9-2980 &
12-2980 (SWING FREE SLIDE ARMS)

RELEASE DATE
OCTOBER 99
TEMPLET NO. **A7358**