

HINGE: BUTT HINGE,
CONTINUOUS HINGE OR
OFFSET PIVOT

ADJUST ARM LENGTH AS SHOWN

2 3/4" $\triangle 5$

15 3/8"

21 7/8"

7/16"

7/16"

TRACK ASSEMBLY

351 DOOR CLOSER

2 1/2" 3 7/8"

2" 9"

2"

#12 X 3" WOOD SCREWS
OR #12-24 X 2 1/4"
FLAT HEAD MACHINE SCREWS

9"

1 7/16" 1/8"-3" REVEAL $\triangle 5$

1 1/4"

1"

TOP OF
DOOR

4" MIN
RAIL $\triangle 3$




4 7/16"

2 3/16"

GLASS


NOTES

1. REINFORCE METAL DOORS AND FRAMES PER ANSI A250.8 & SDI-100, 12 GAUGE RECOMMENDED.
2. RIGHT HAND DOOR SHOWN, LEFT HAND OPPOSITE.
3. FOR NARROW RAIL DOORS (WIDER THAN 2 1/4"), USE 351-A DROP PLATE, SEE TEMPLATE A6772
4. AUXILARY STOP REQUIRED.
5. FOR REVEALS 1" OR LESS, INSTALL THE TRACK 1 3/4" AWAY FROM THE HINGE.
6. 120° MAX OPENING

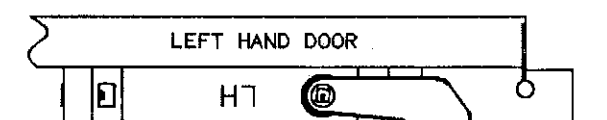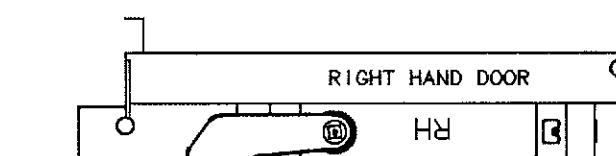

INDEX MARK
ON SPINDLE

POSITION OF ARM WHEN
ASSEMBLING TO SPINDLE



INDEX MARK
ON SPINDLE

SARGENT® Manufacturing Company
100 Sargent Drive New Haven, CT 06511

DATA SHEET:
351-ODS SERIES DOOR CLOSER
WITH A SINGLE STEP DOUBLE
EGRESS FRAME

EFFECTIVE DATE
10 Aug 05
TEMPLATE NO.
A7818 A