



IMPORTANT: USE ALTERNATE MOUNTING IF DOOR CAN OPEN BEYOND LIMITS SHOWN FOR STANDARD MOUNTING

ARM TYPE	MOUNTING	MAX. DOOR OPENING	DIM. A	DIM. B
"H" HOLDER ARM	STANDARD	110°	9 1/2"	12 3/4"
	ALTERNATE	160°	6 1/2"	9 3/4"

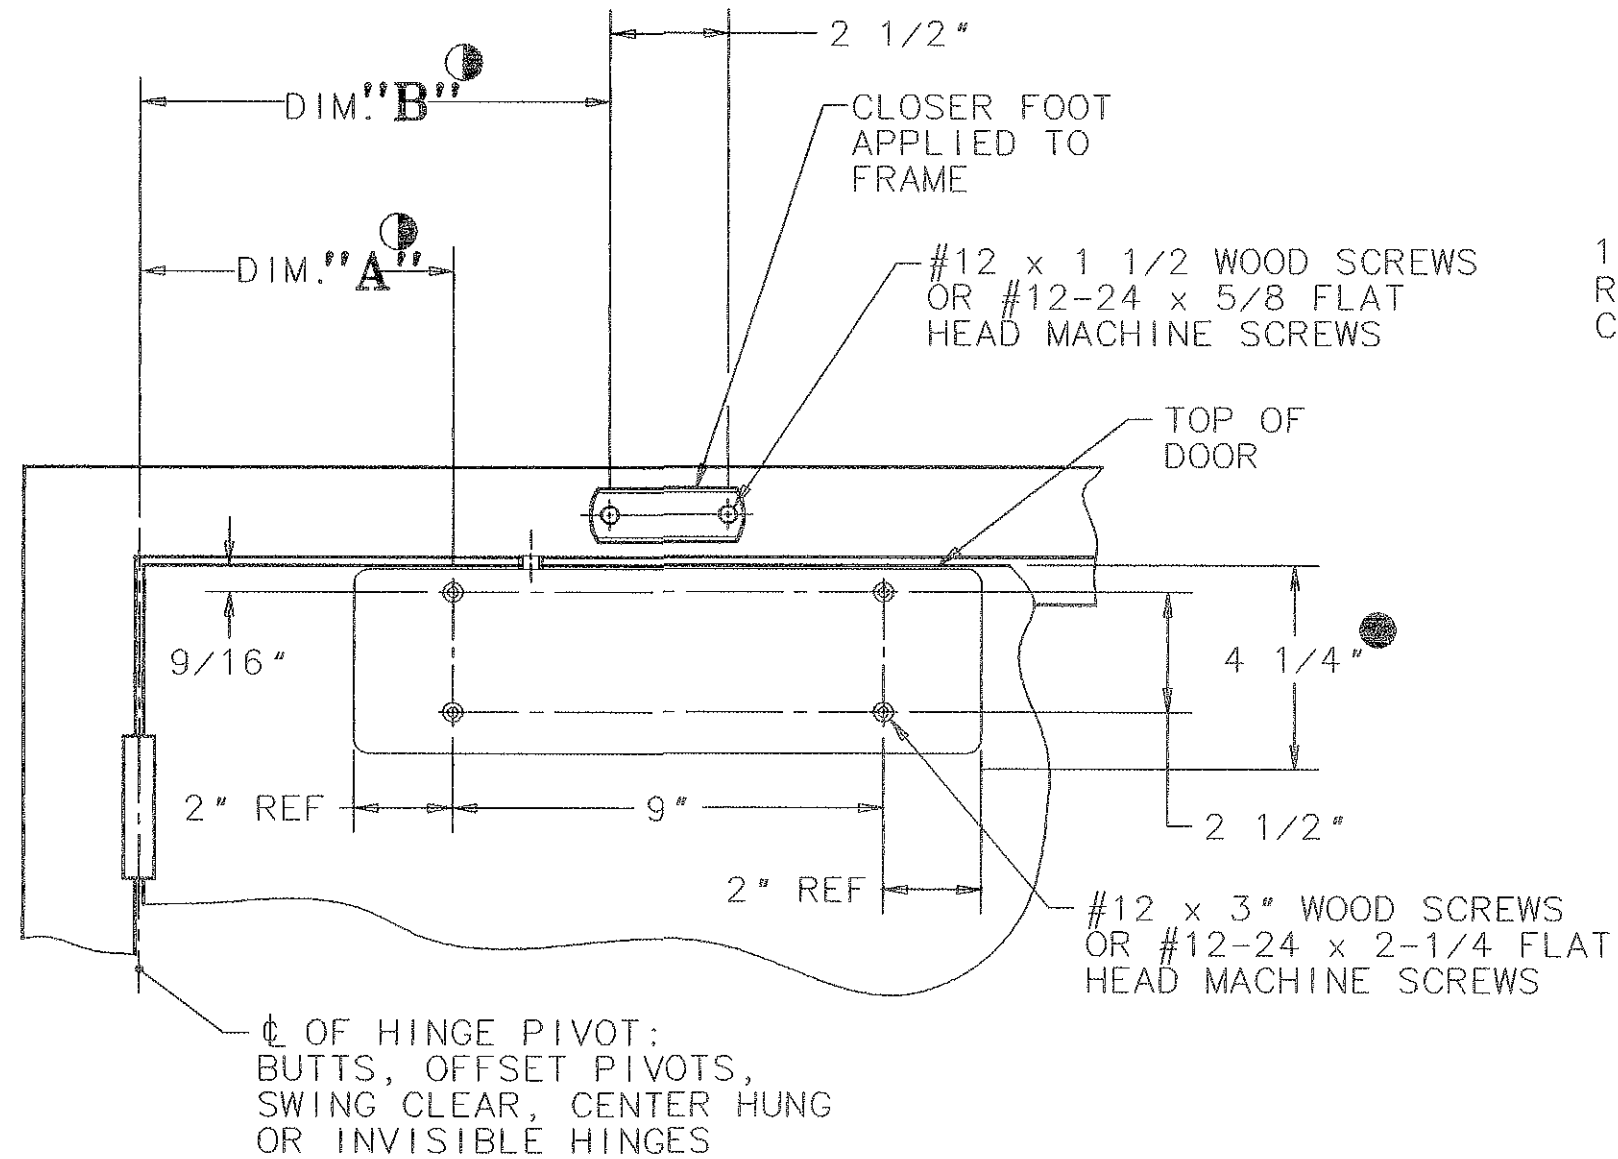

1 7/8" MIN. SPACE REQUIRED FOR ARM CLEARANCE

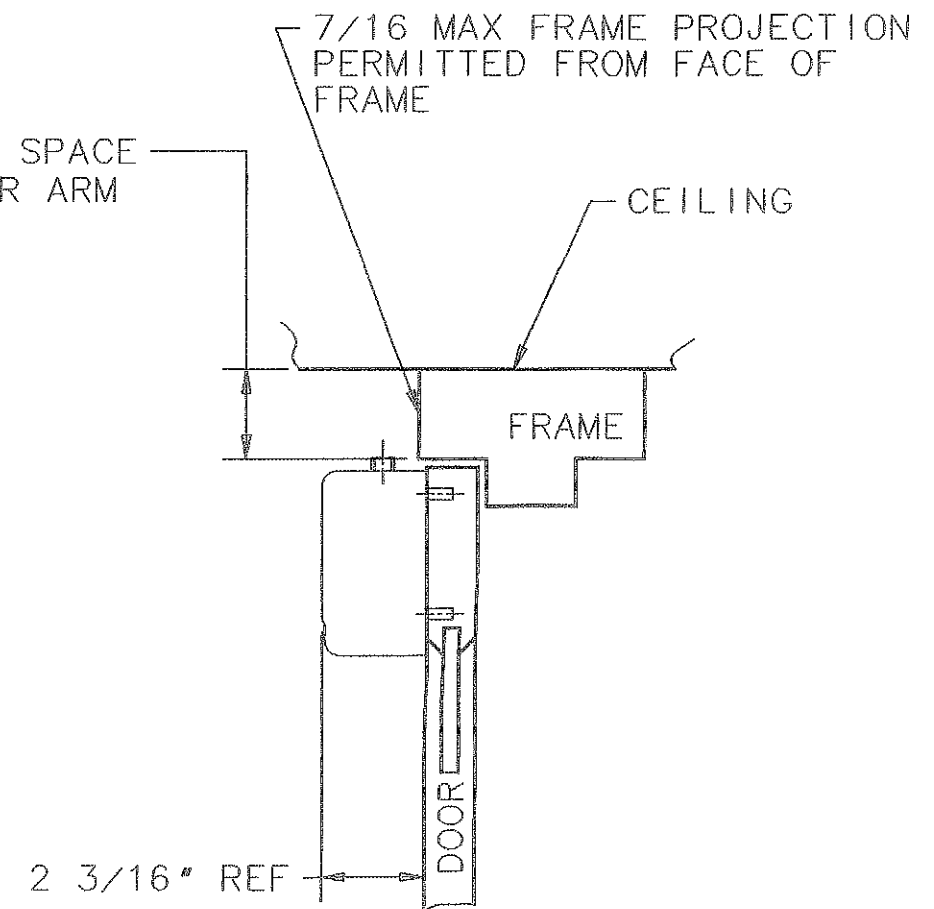

③ IF BUTT, FRAME AND WALL CONDITIONS PERMIT, CLOSER WILL ALLOW DOOR TO OPEN 180°.

② RIGHT HAND DOOR SHOWN. LEFT HAND OPPOSITE.

① 12 GAUGE MIN. REINFORCEMENT REQUIRED FOR METAL DOORS & FRAMES.

⑤ 351-A MOUNTING PLATE MAY BE USED FOR DOOR WITH NARROW TOP RAIL. SEE DATA SHEET A6772.

④ THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.

SARGENT MANUFACTURING COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET: 351
SERIES CLOSER x STANDARD ARM
APPLICATION - "H" ARM

EFFECTIVE DATE

SEPT. 99

TEMPLATE NO.

A7327 B