
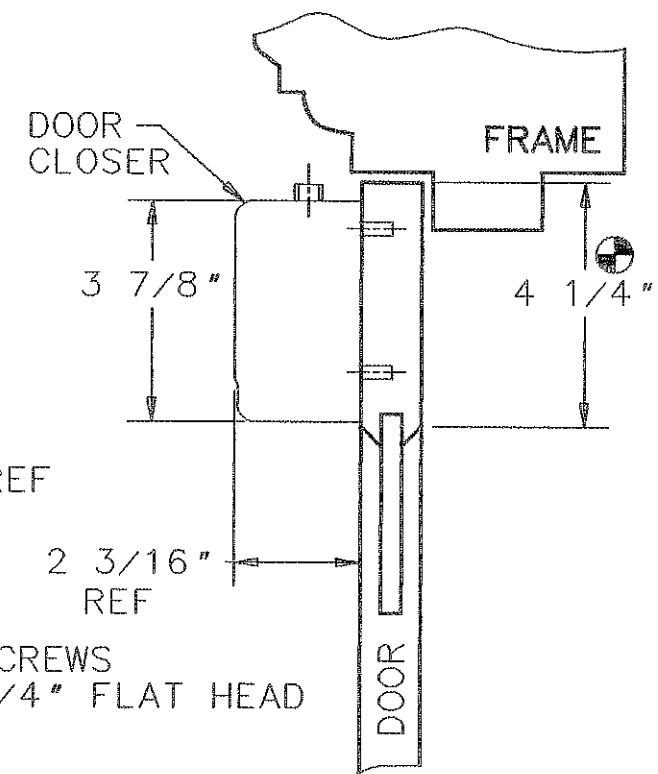
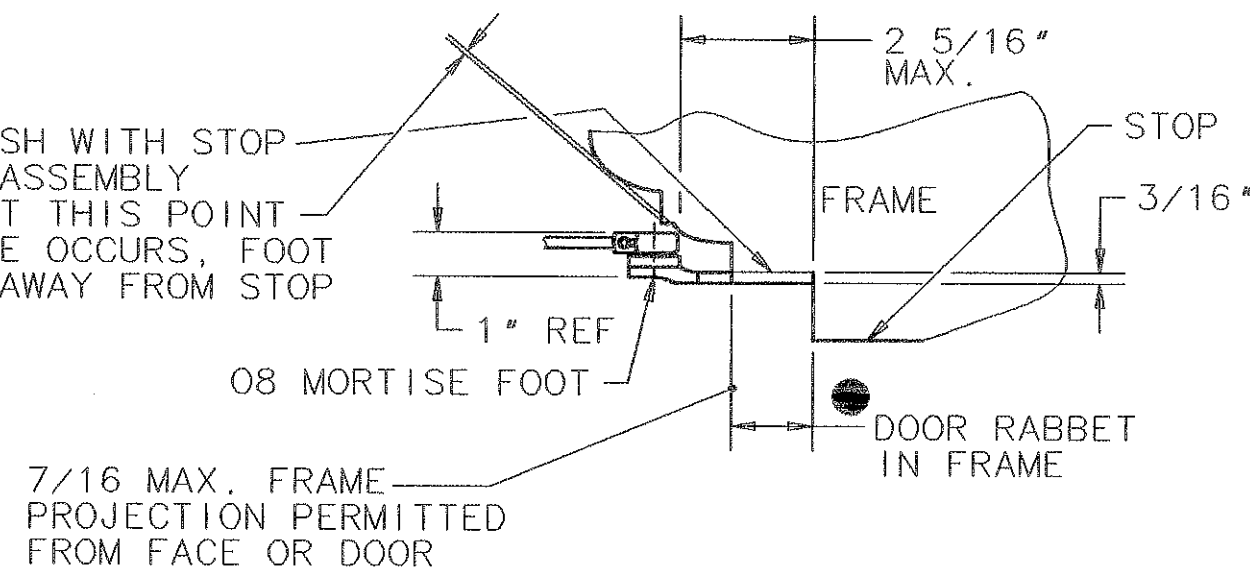


08 TYPE ARM ASSEMBLY SHOWN  
F8 TYPE ARM SIMILAR

| IMPORTANT: USE ALTERNATE MOUNTING IF DOOR CAN OPEN BEYOND LIMITS SHOWN FOR STANDARD MOUNTING |                            |                |           |                      |                 |          |                      |
|----------------------------------------------------------------------------------------------|----------------------------|----------------|-----------|----------------------|-----------------|----------|----------------------|
| ARM TYPE                                                                                     | DESCRIPTION                | STANDARD MOUNT |           |                      | ALTERNATE MOUNT |          |                      |
|                                                                                              |                            | DIM. A         | DIM. B    | MAXIMUM DOOR OPENING | DIM. A          | DIM. B   | MAXIMUM DOOR OPENING |
| 08                                                                                           | REGULAR ARM                | 8 3/16"        | 11 15/16" | 120°                 | 6 13/16"        | 10 9/16" | 160°                 |
| F8                                                                                           | 90° HOLD OPEN FUSIBLE LINK |                |           | 110°                 |                 |          | 135°                 |

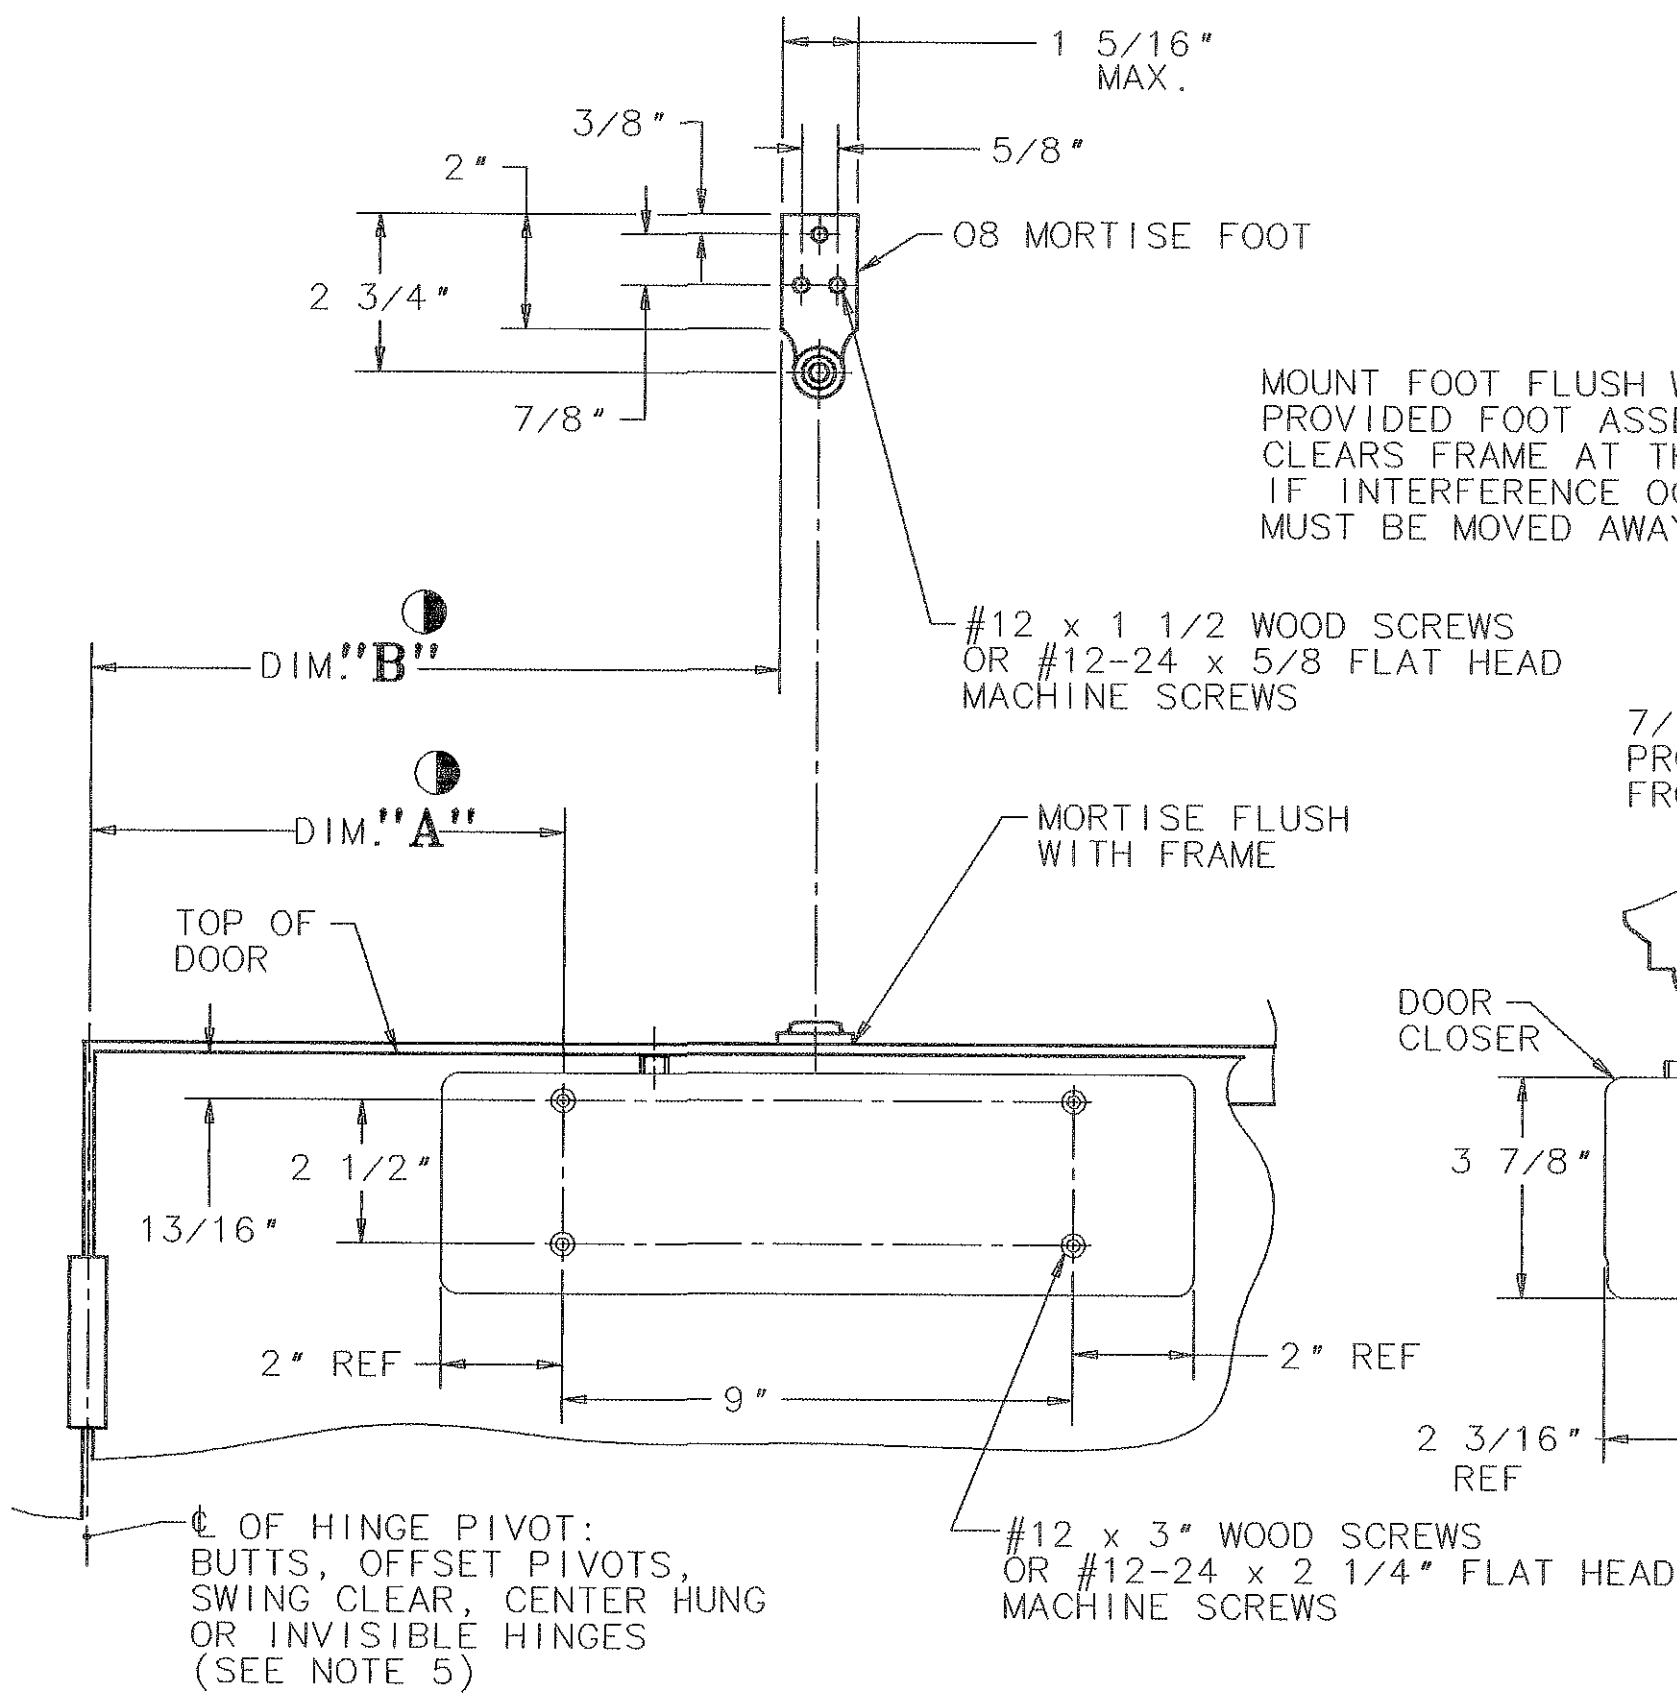

- ⑥ 351-A MOUNTING PLATE MAY BE USED FOR DOOR WITH NARROW TOP RAIL. (SEE DATA SHEET A6772).
- ⑤ IF THIS DIMENSION IS GREATER THAN 1 15/16" MOVE FOOT AWAY FROM STOP BY THE FOLLOWING AMOUNT: ACTUAL DIMENSION LESS THAN 1 15/16".
- ④ THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.
- ③ IF BUTT, FRAME AND WALL CONDITIONS PERMIT, CLOSER WILL ALLOW DOOR TO OPEN 180°.
- ② RIGHT HAND DOOR SHOWN. LEFT HAND DOOR OPPOSITE.
- ① 12 GAUGE MIN. REINFORCEMENT REQUIRED FOR METAL DOORS & FRAMES.