


IMPORTANT: USE ALTERNATE MOUNTING IF DOOR CAN OPEN BEYOND LIMITS SHOWN FOR STANDARD MOUNTING							
ARM TYPE	DESCRIPTION	STANDARD MOUNTING			ALTERNATE MOUNTING		
		DIM. A	DIM. B	MAX. DOOR OPENING	DIM. A	DIM. B	MAX. DOOR OPENING
PF9	90°-180° HOLD OPEN FUSIBLE LINK	9 7/8"	10 1/8"	110°	7"	7 1/4"	180°

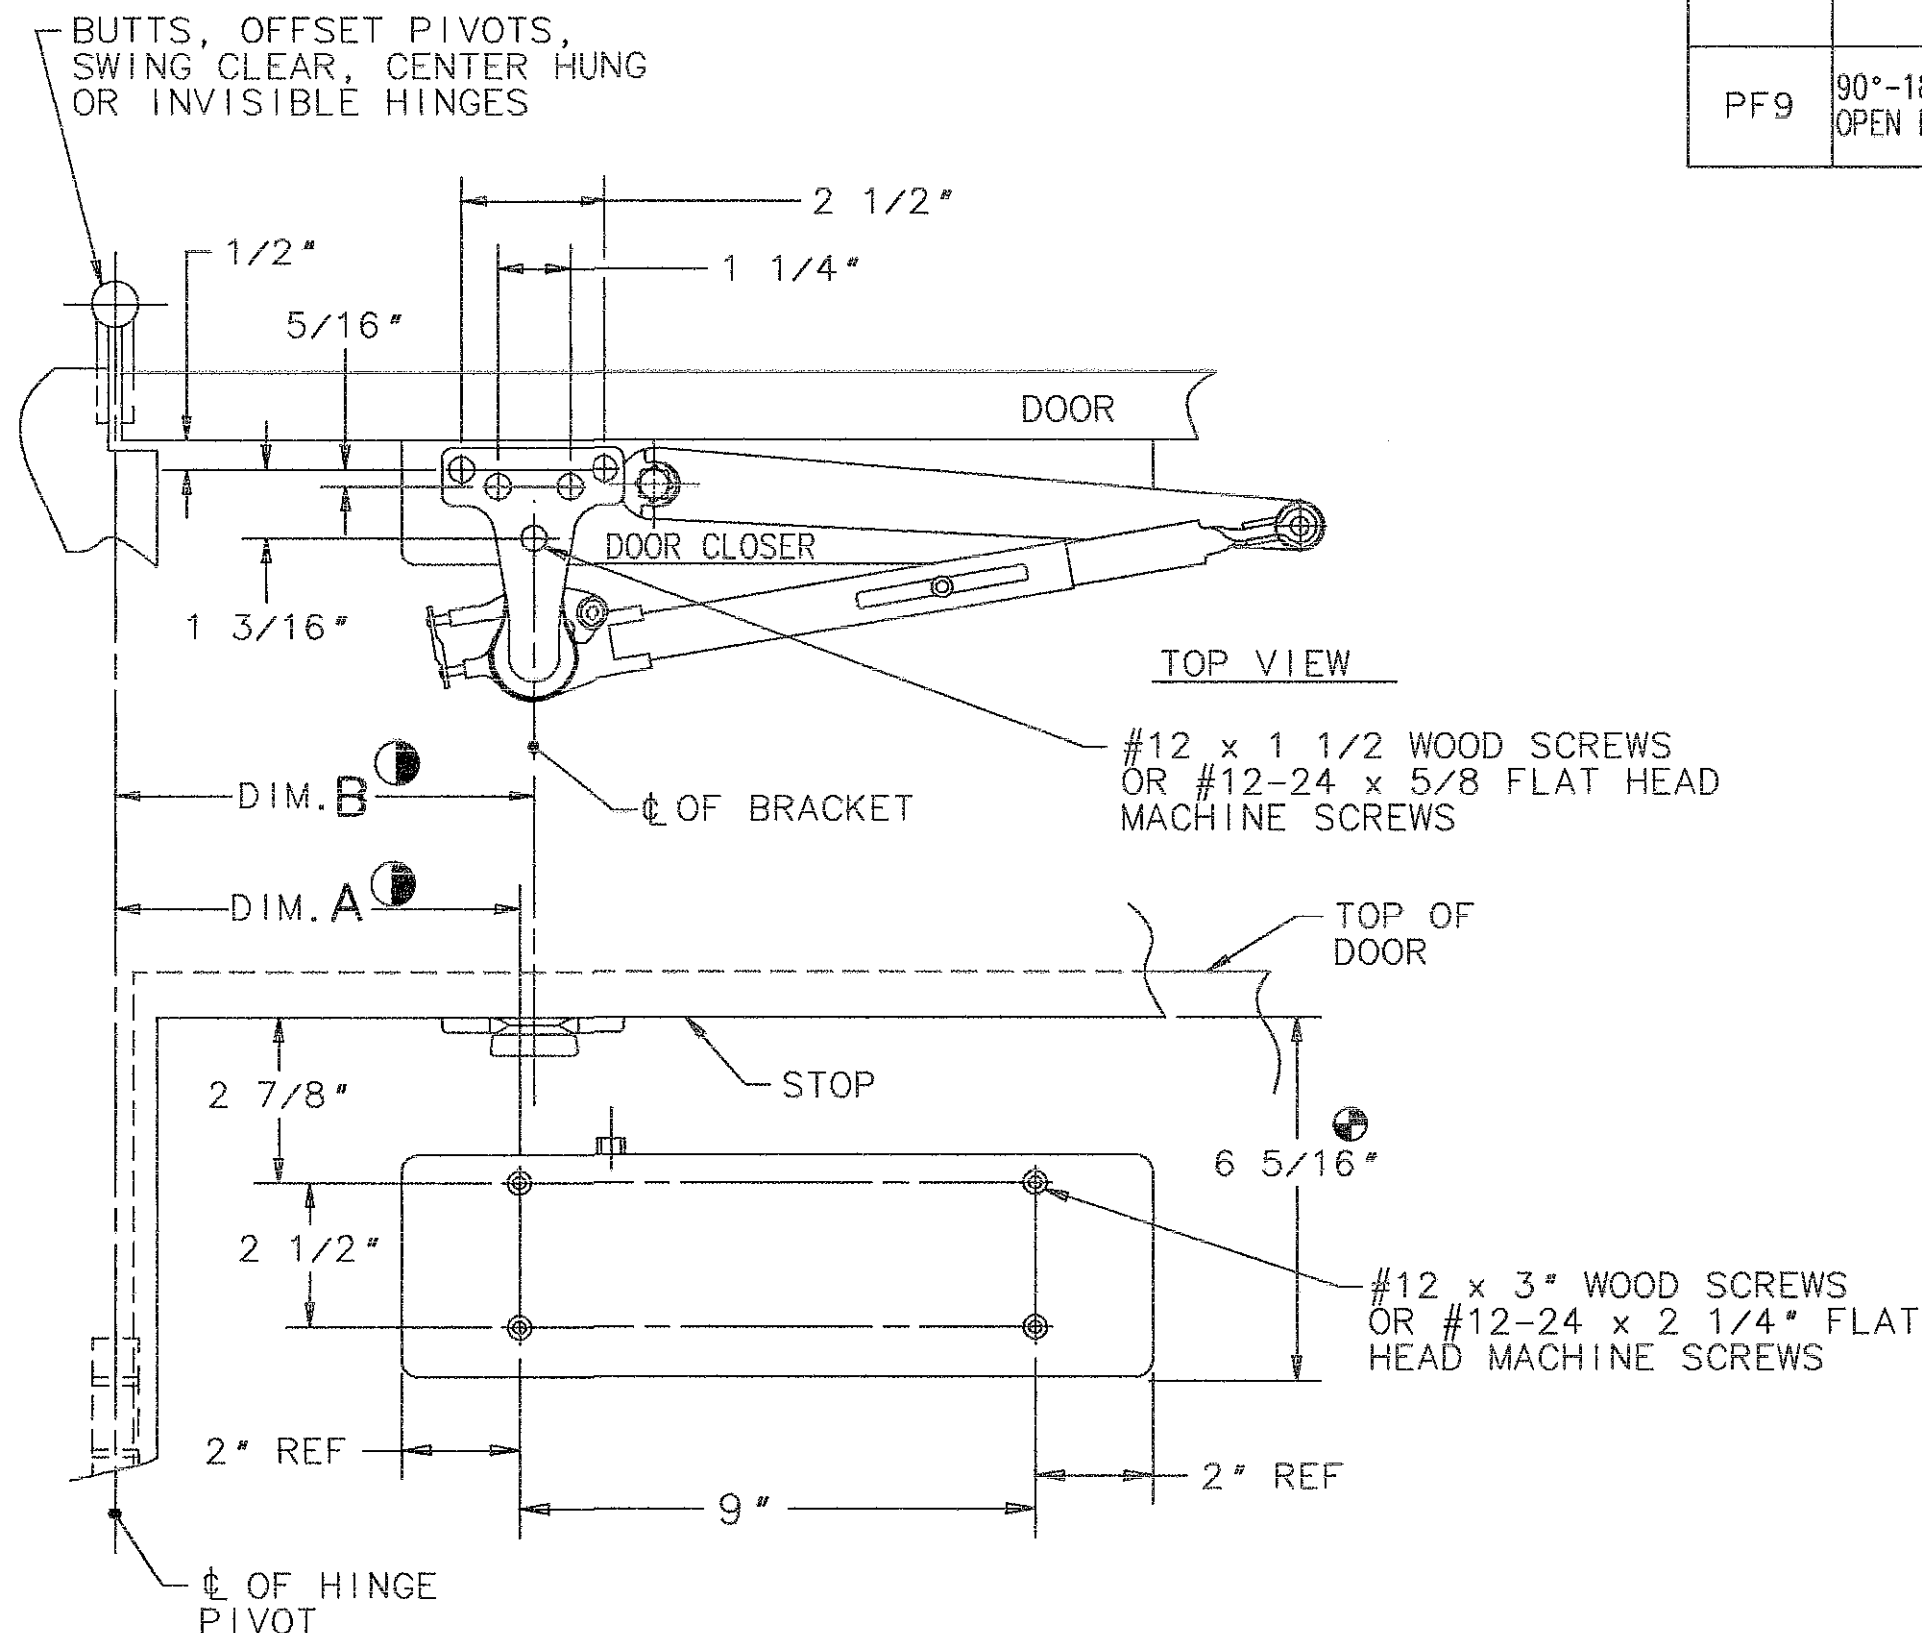

- ④ SPACE REQUIRED TO MOUNT CLOSER ON RAIL. IF SPACE IS LESS THAN SHOWN USE 351-D DROP BRACKET. (SEE DATA SHEET A6745).
- ③ THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.
- ② LEFT HAND DOOR SHOWN. RIGHT HAND OPPOSITE.
- ① 12 GAUGE MIN. REINFORCEMENT REQUIRED FOR METAL DOORS & FRAMES.

SARGENT MANUFACTURING COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET: 351 SERIES
CLOSER x PARALLEL ARM
APPLICATION-PF9 ARM

EFFECTIVE DATE

OCT 00

TEMPLET NO.

A6766 C