



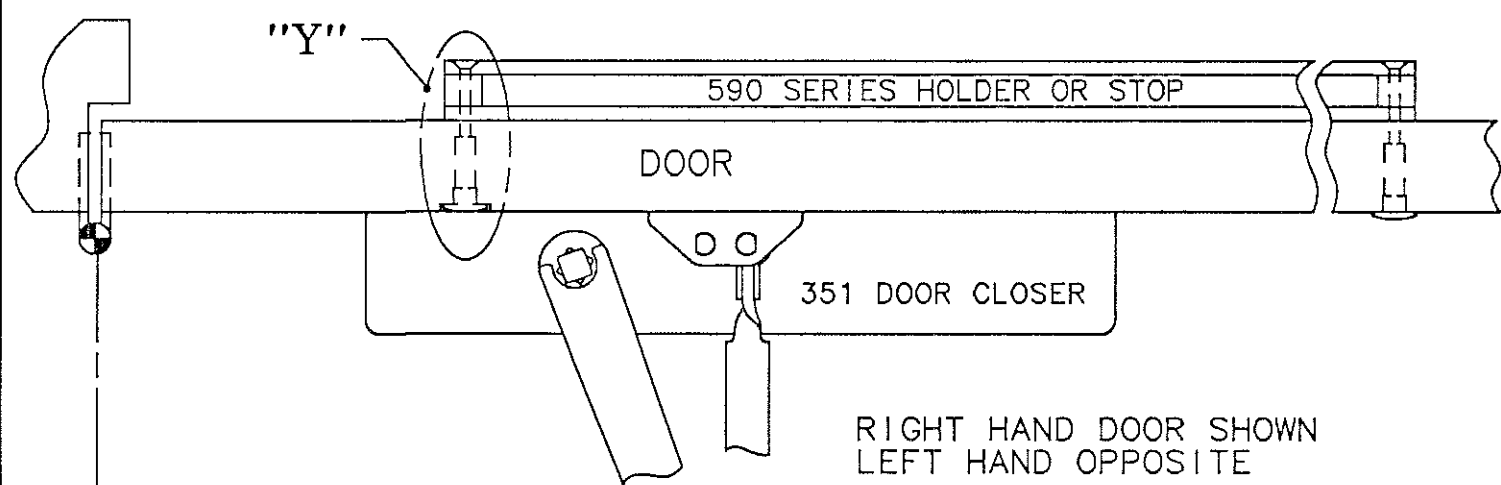

HOLDER/STOP MODEL NO.	DIM "A"	DIM "B"
597S OR 597H	8 3/16"	11 7/16"
598S OR 598H	6 13/16"	10 1/16"
599S OR 599H	8 3/16"	11 7/16"


Ø OF HINGE

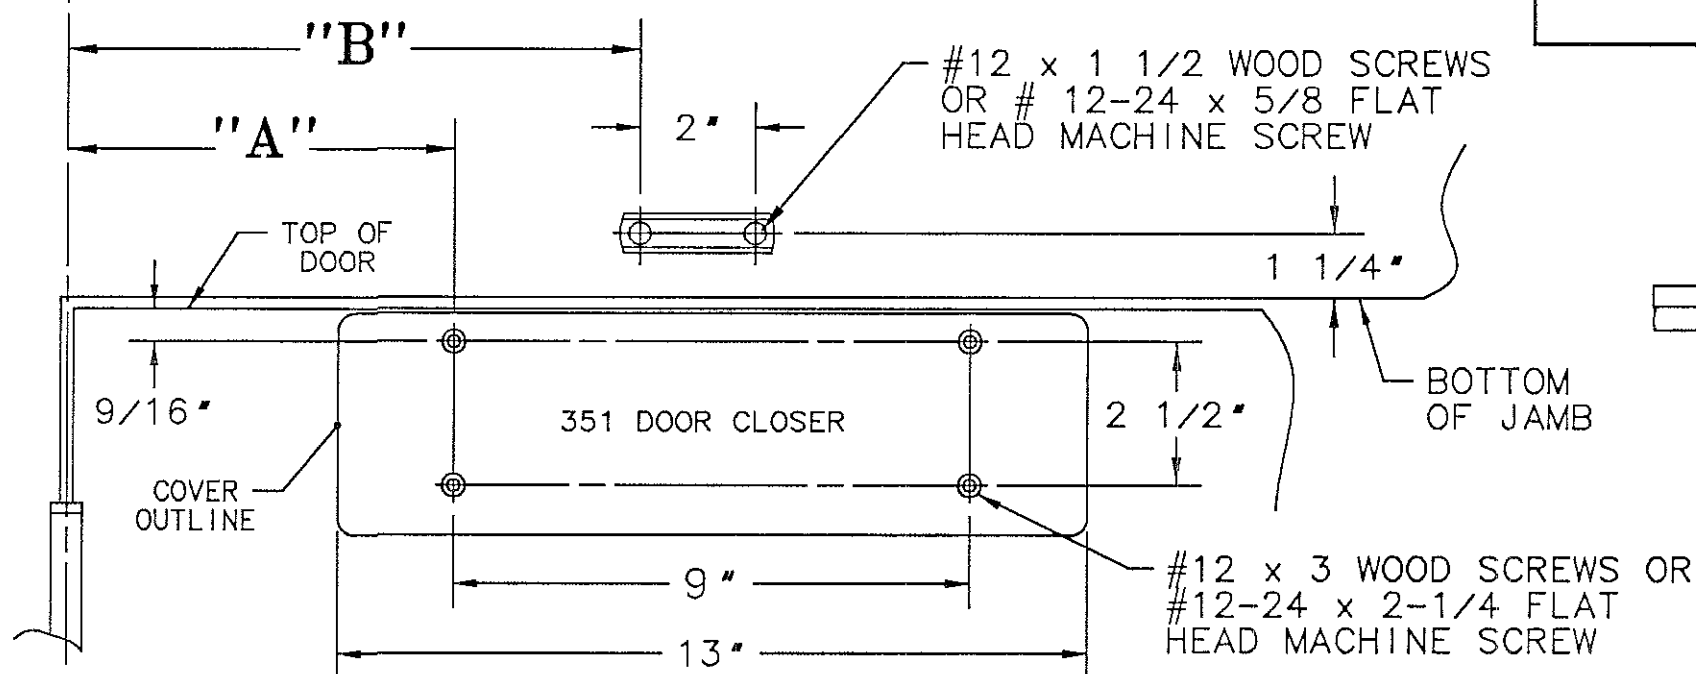


NOTES

1. REINFORCE METAL DOORS & FRAMES PER ANSI A250.8 AND SDI-100 STANDARDS, 12 GAUGE RECOMMENDED.
2. FOR THIN TOP RAIL DOORS, USE 351-D DROP BRACKET, SEE TEMPLATE A6745.
3. FOR 597-599 INSTALLATION, SEE TEMPLATES A7479 THRU A7481.

WHEN THRU-BOLTING DOOR CLOSER, THE TOP MORTISE NUTS MAY HAVE TO BE RECESSED.

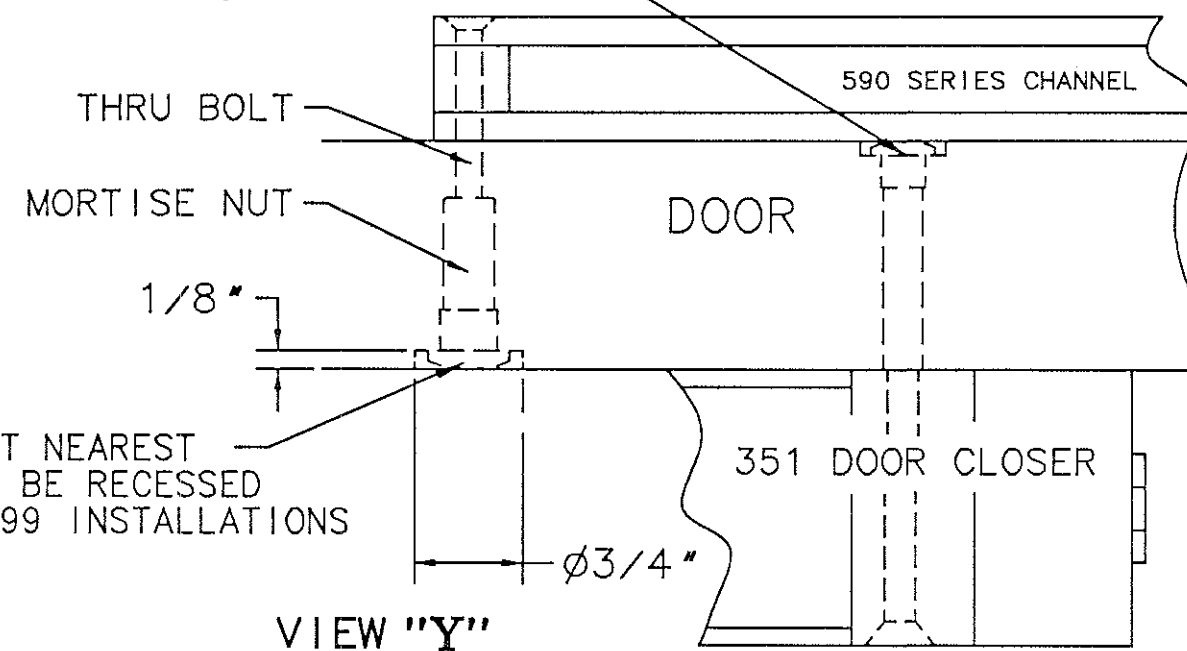

MORTISE NUT HEADS MUST BE RECESSED INTO DOOR WHEN CONFLICTS OCCUR.

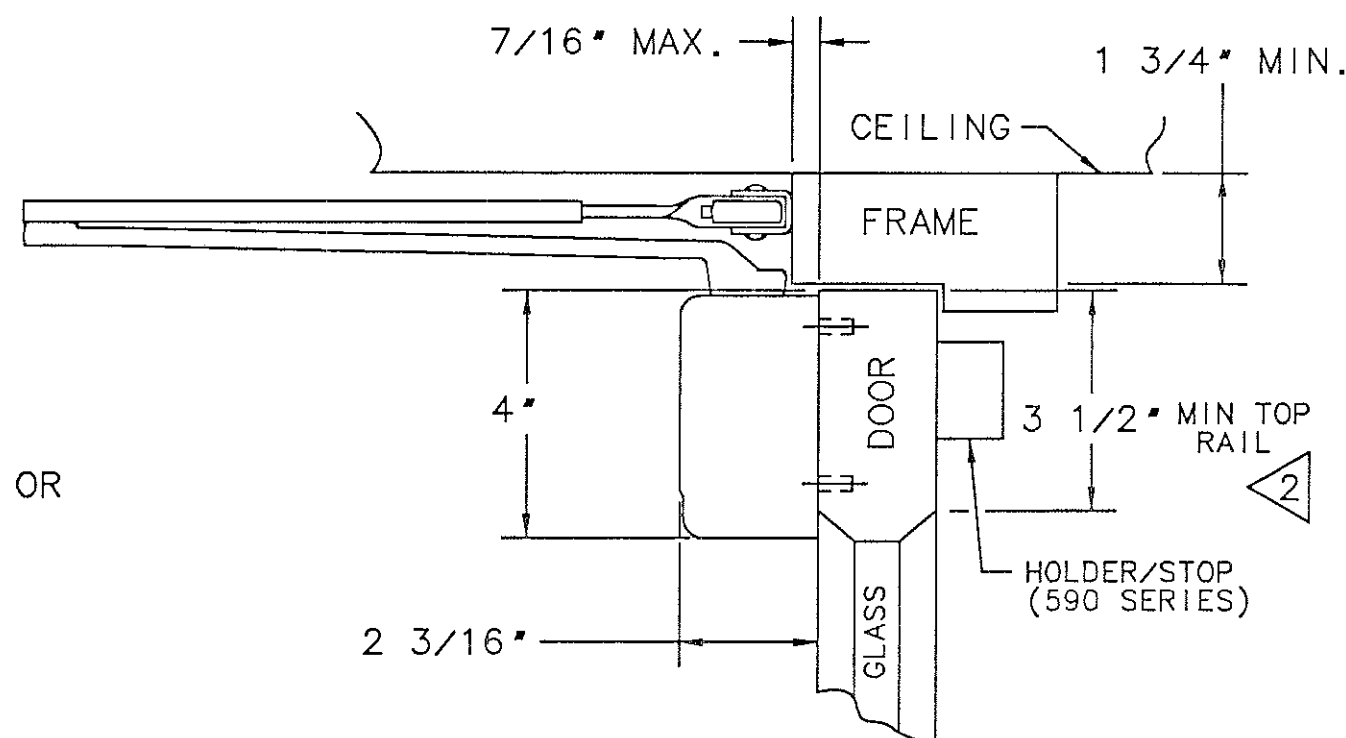

SARGENT MANUFACTURING COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET: 351 CLOSER WITH
STANDARD APPLICATION *0" ARM &
597-599 SERIES HOLDER OR STOP

EFFECTIVE DATE
APRIL 02
TEMPLATE NO.
A7531 B