

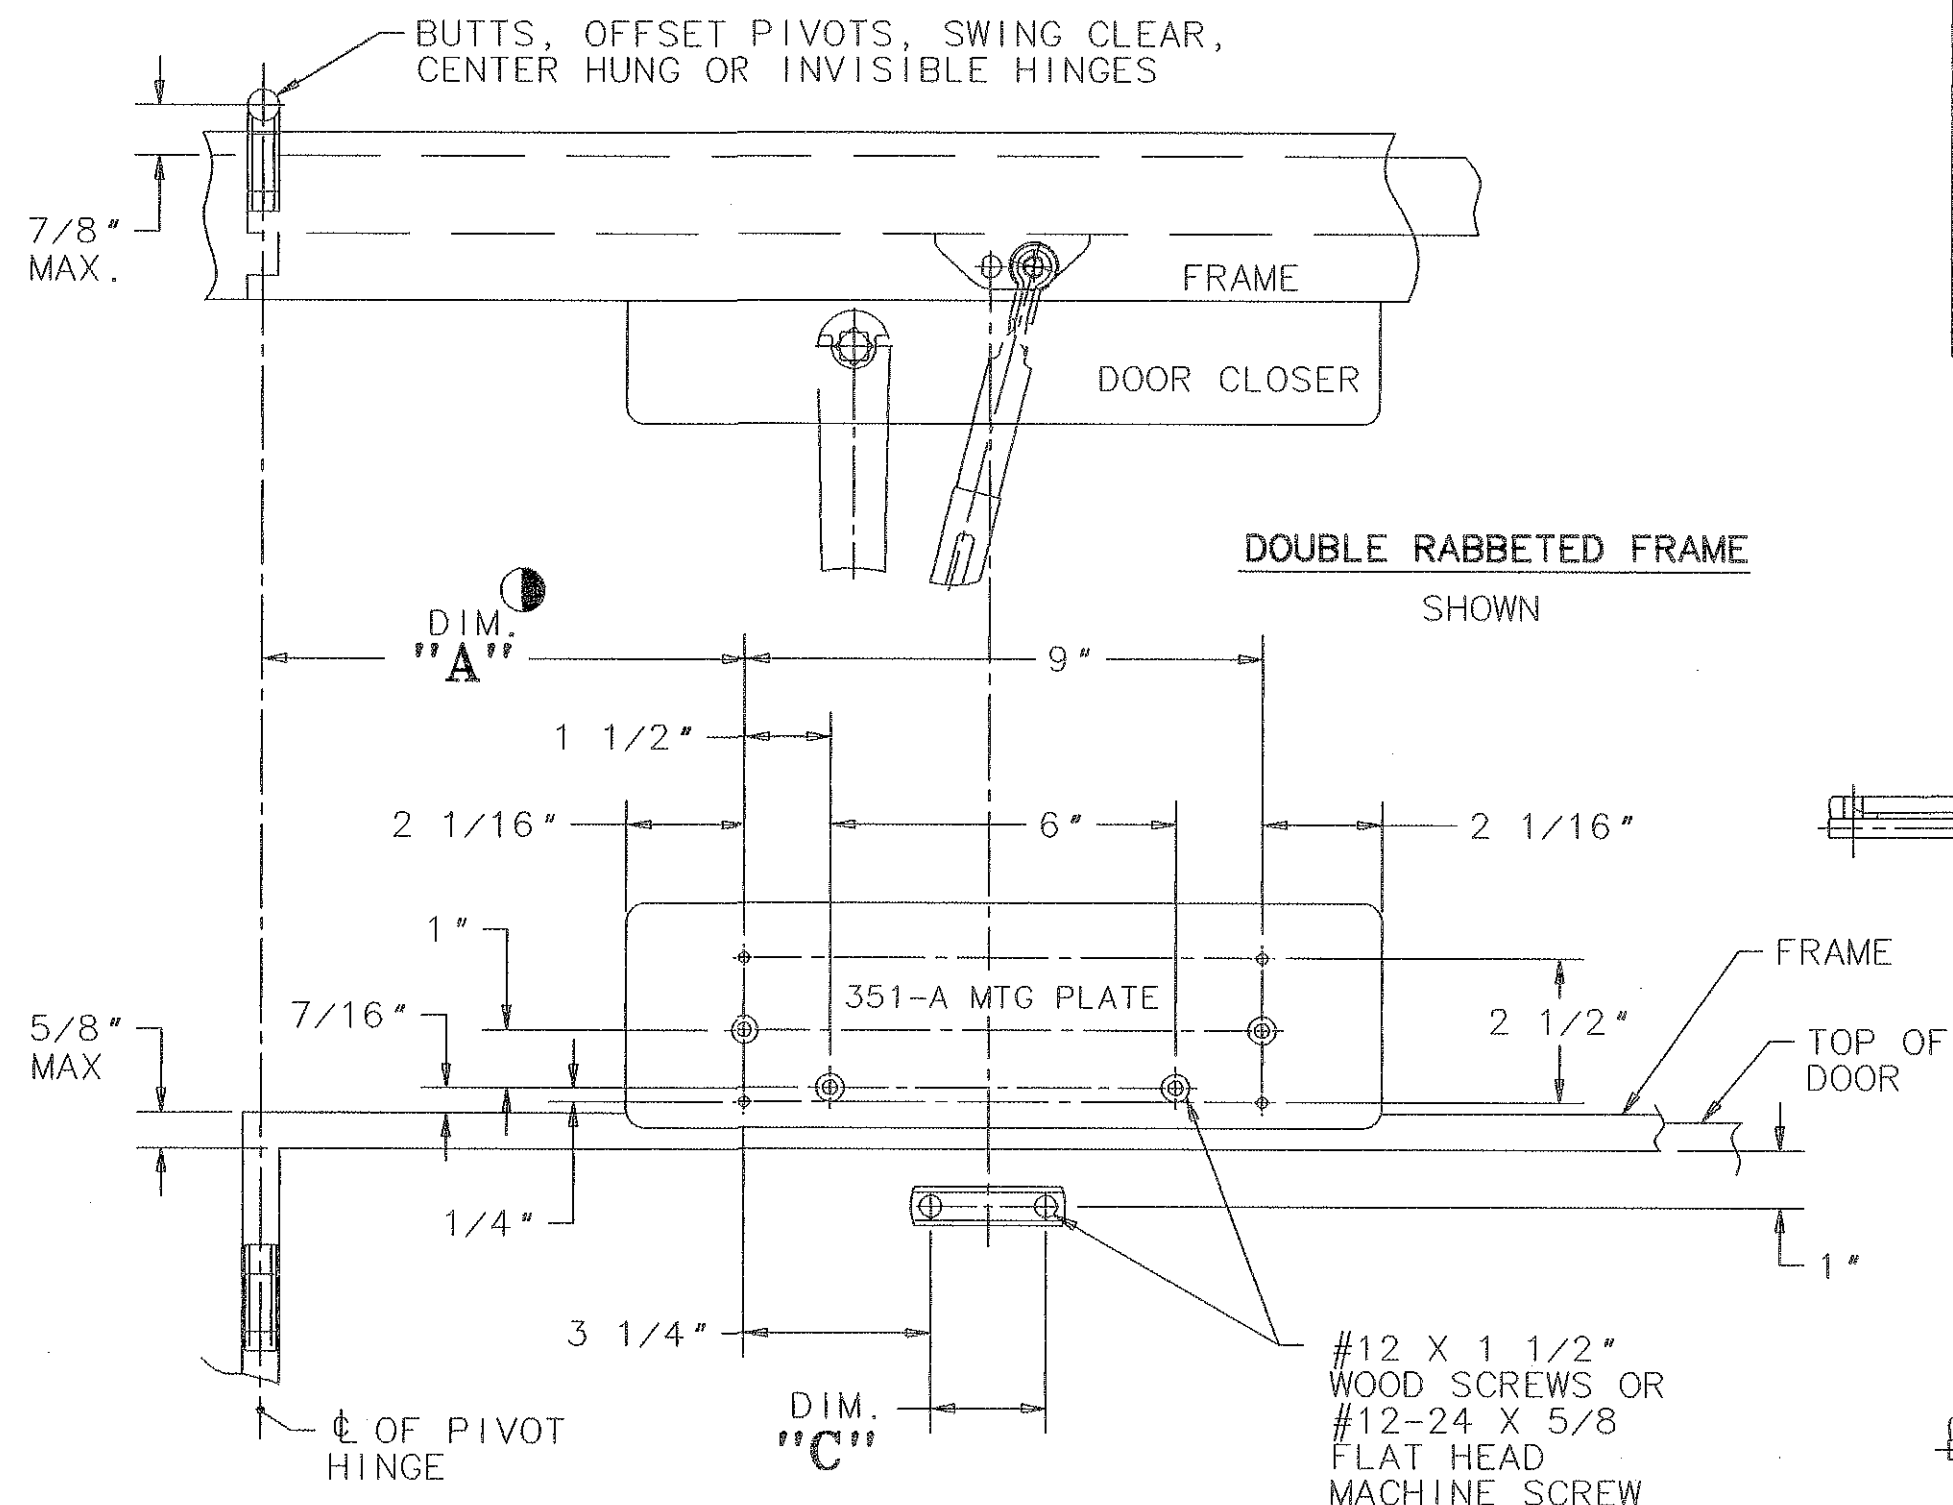


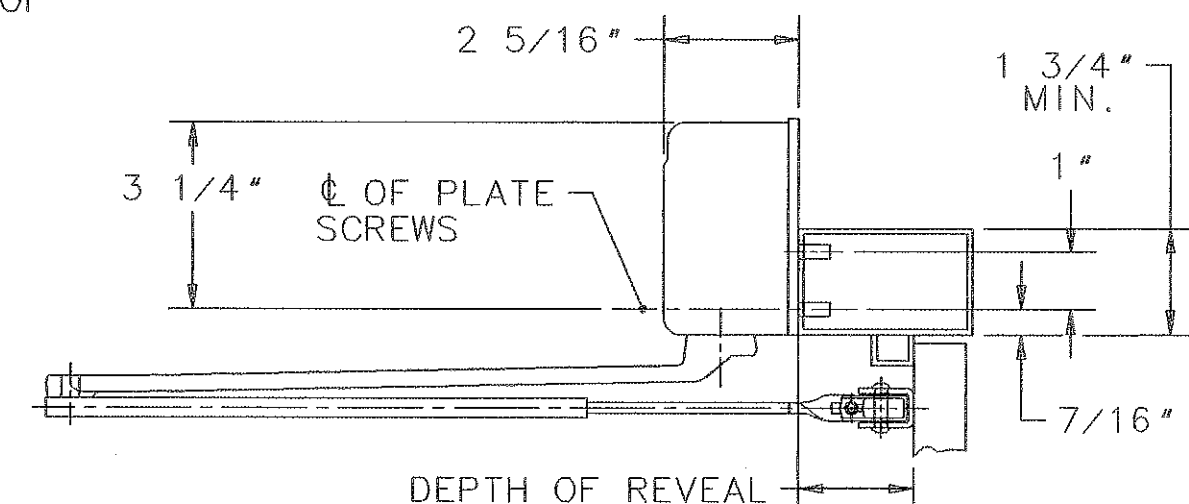

DESCRIPTION	TYPE ARM	DOOR OPENINGS		DIM. "C"	DEPTH OF REVEAL	RANGE OF HOLD OPEN
		110° DIM. "A"	140° DIM. "A"			
REGULAR ARM WITHOUT HOLD OPEN	O OZ OZA	8 5/8"	5 3/8"	2"	0" TO 2" 2 1/8" TO 5" 5 1/8" TO 8"	80°-130°
90° HOLD OPEN FUSIBLE LINK	F FZ FZA				0" TO 2" 2 1/8" TO 5" 5 1/8" TO 8"	
90°-180° HOLDER ARM	H HZ HZA				0" TO 2" 2 1/8" TO 5" 5 1/8" TO 8"	80°-180° 80°-140° 80°-130°

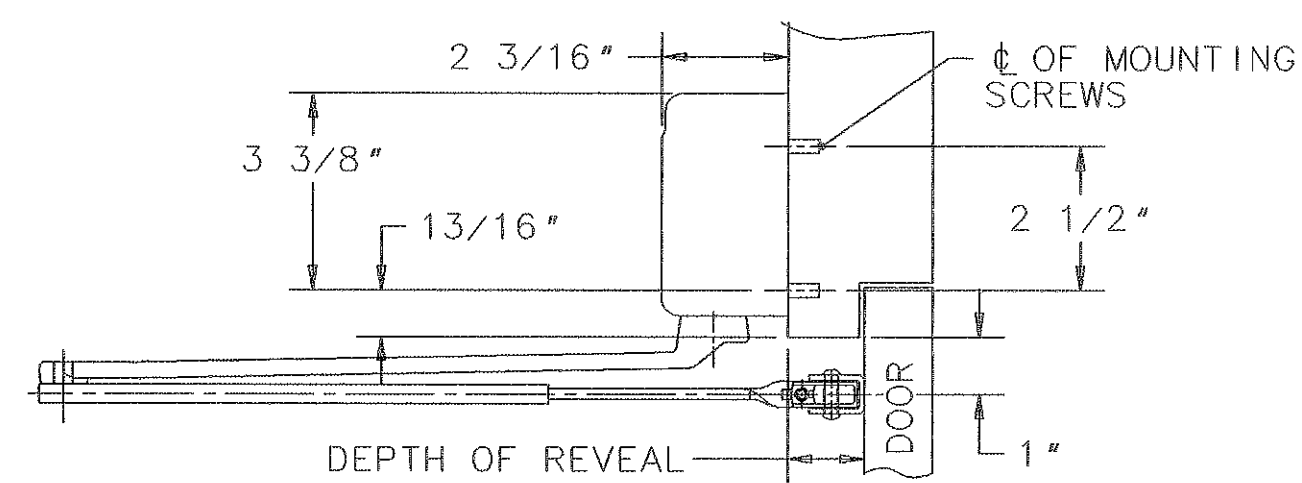

- ④ THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR.
- ③ LEFT HAND DOOR SHOWN, RIGHT HAND DOOR OPPOSITE.
- ② MAXIMUM DOOR OPENINGS SHOWN IN CHARTS APPLY TO DOORS UP TO 2 1/4" THICK ONLY.
- ① 12 GAUGE MIN. REINFORCEMENTS REQUIRED FOR METAL DOORS AND FAMES.
- ⑥ DOOR OPENINGS TO 180° ARE POSSIBLE IF DEPTH OF REVEAL IS NOT GREATER THAN 2".
- ⑤ FUSIBLE LINK ARM IS HANDED AND MUST BE THE SAME HAND AS DOOR.

SARGENT MANUFACTURING COMPANY		NEW HAVEN, CONN. 06511	
DATA SHEET: 351		EFFECTIVE DATE	
SERIES CLOSER x TOP JAMB		SEPT. 99	
APPLICATION - O, H & F ARMS		TEMPLET NO.	
FOR RABBETED FRAMES		A6744 B	