



SEE NOTE #3

CL OF LOCK
FRONT & STRIKE

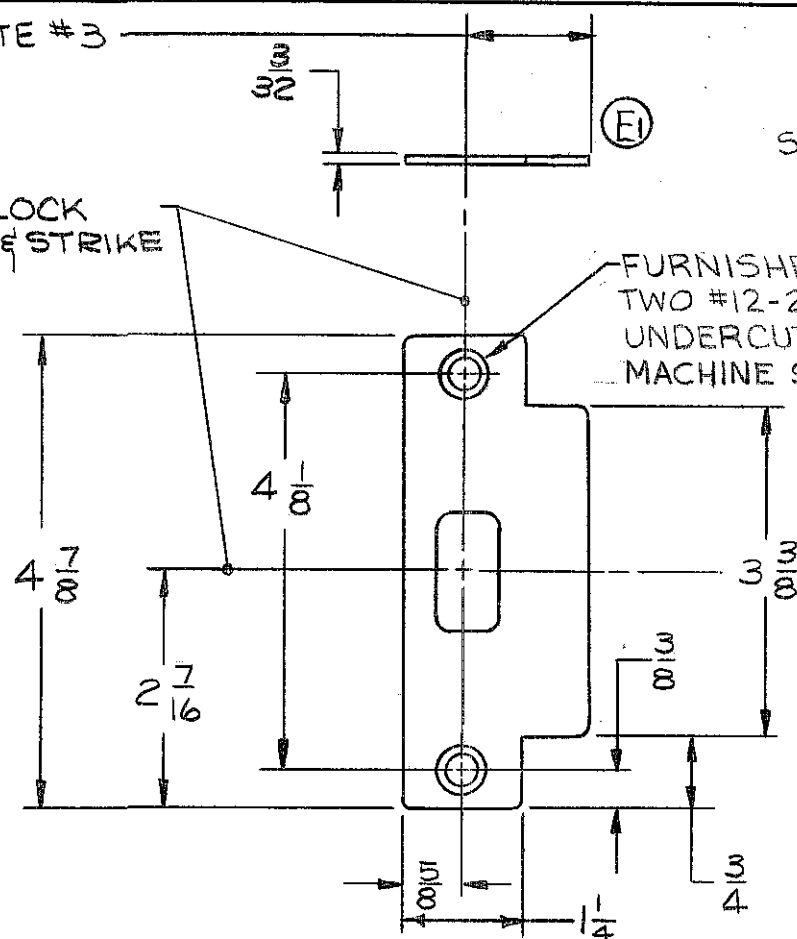


CL OF STRIKE

SEE NOTE #4



OUTER SURFACE
OF SILENCER

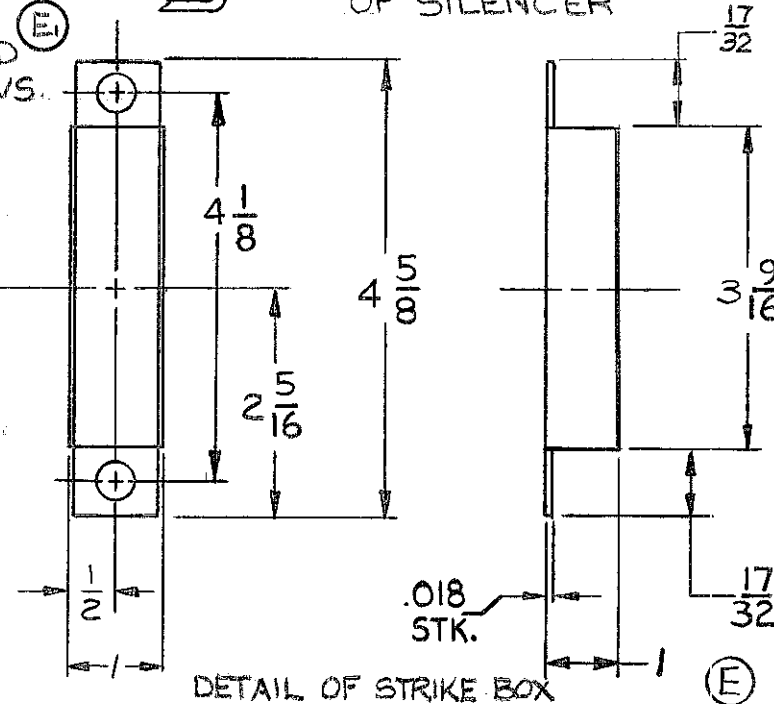

STRIKE BOX FURNISHED
ONLY WHEN SO ORDERED

- ④ WHEN DOOR SILENCERS ARE USED ON DOOR FRAME, LOCATE CENTERLINE OF STRIKE FROM SURFACE OF DOOR SILENCER AS SHOWN.
- ③ 1/8 LIP LENGTH REGULARLY FURNISHED FOR 1 3/8 DOORS & FRAMES.
1/4 LIP LENGTH FURNISHED FOR 1 3/4 DOOR & FRAME.
LIP LENGTHS 1 3/8 THRU 2 7/8 IN INCREMENTS OF 1/4 WHEN ORDERED.

- ② DIMENSIONS SHOWN ARE MAXIMUM PART DIMENSIONS.

- ① STRIKE OUTLINE FOR FRAME FITS CURRENT ANSI A115.2 STANDARD

SARGENT & COMPANY

NEW HAVEN 9, CONN.

TEMPLATE:
408 FLAT LIP STRIKE

RELEASE DATE

21 MAY 85

TEMPLET NO.

4238 E