


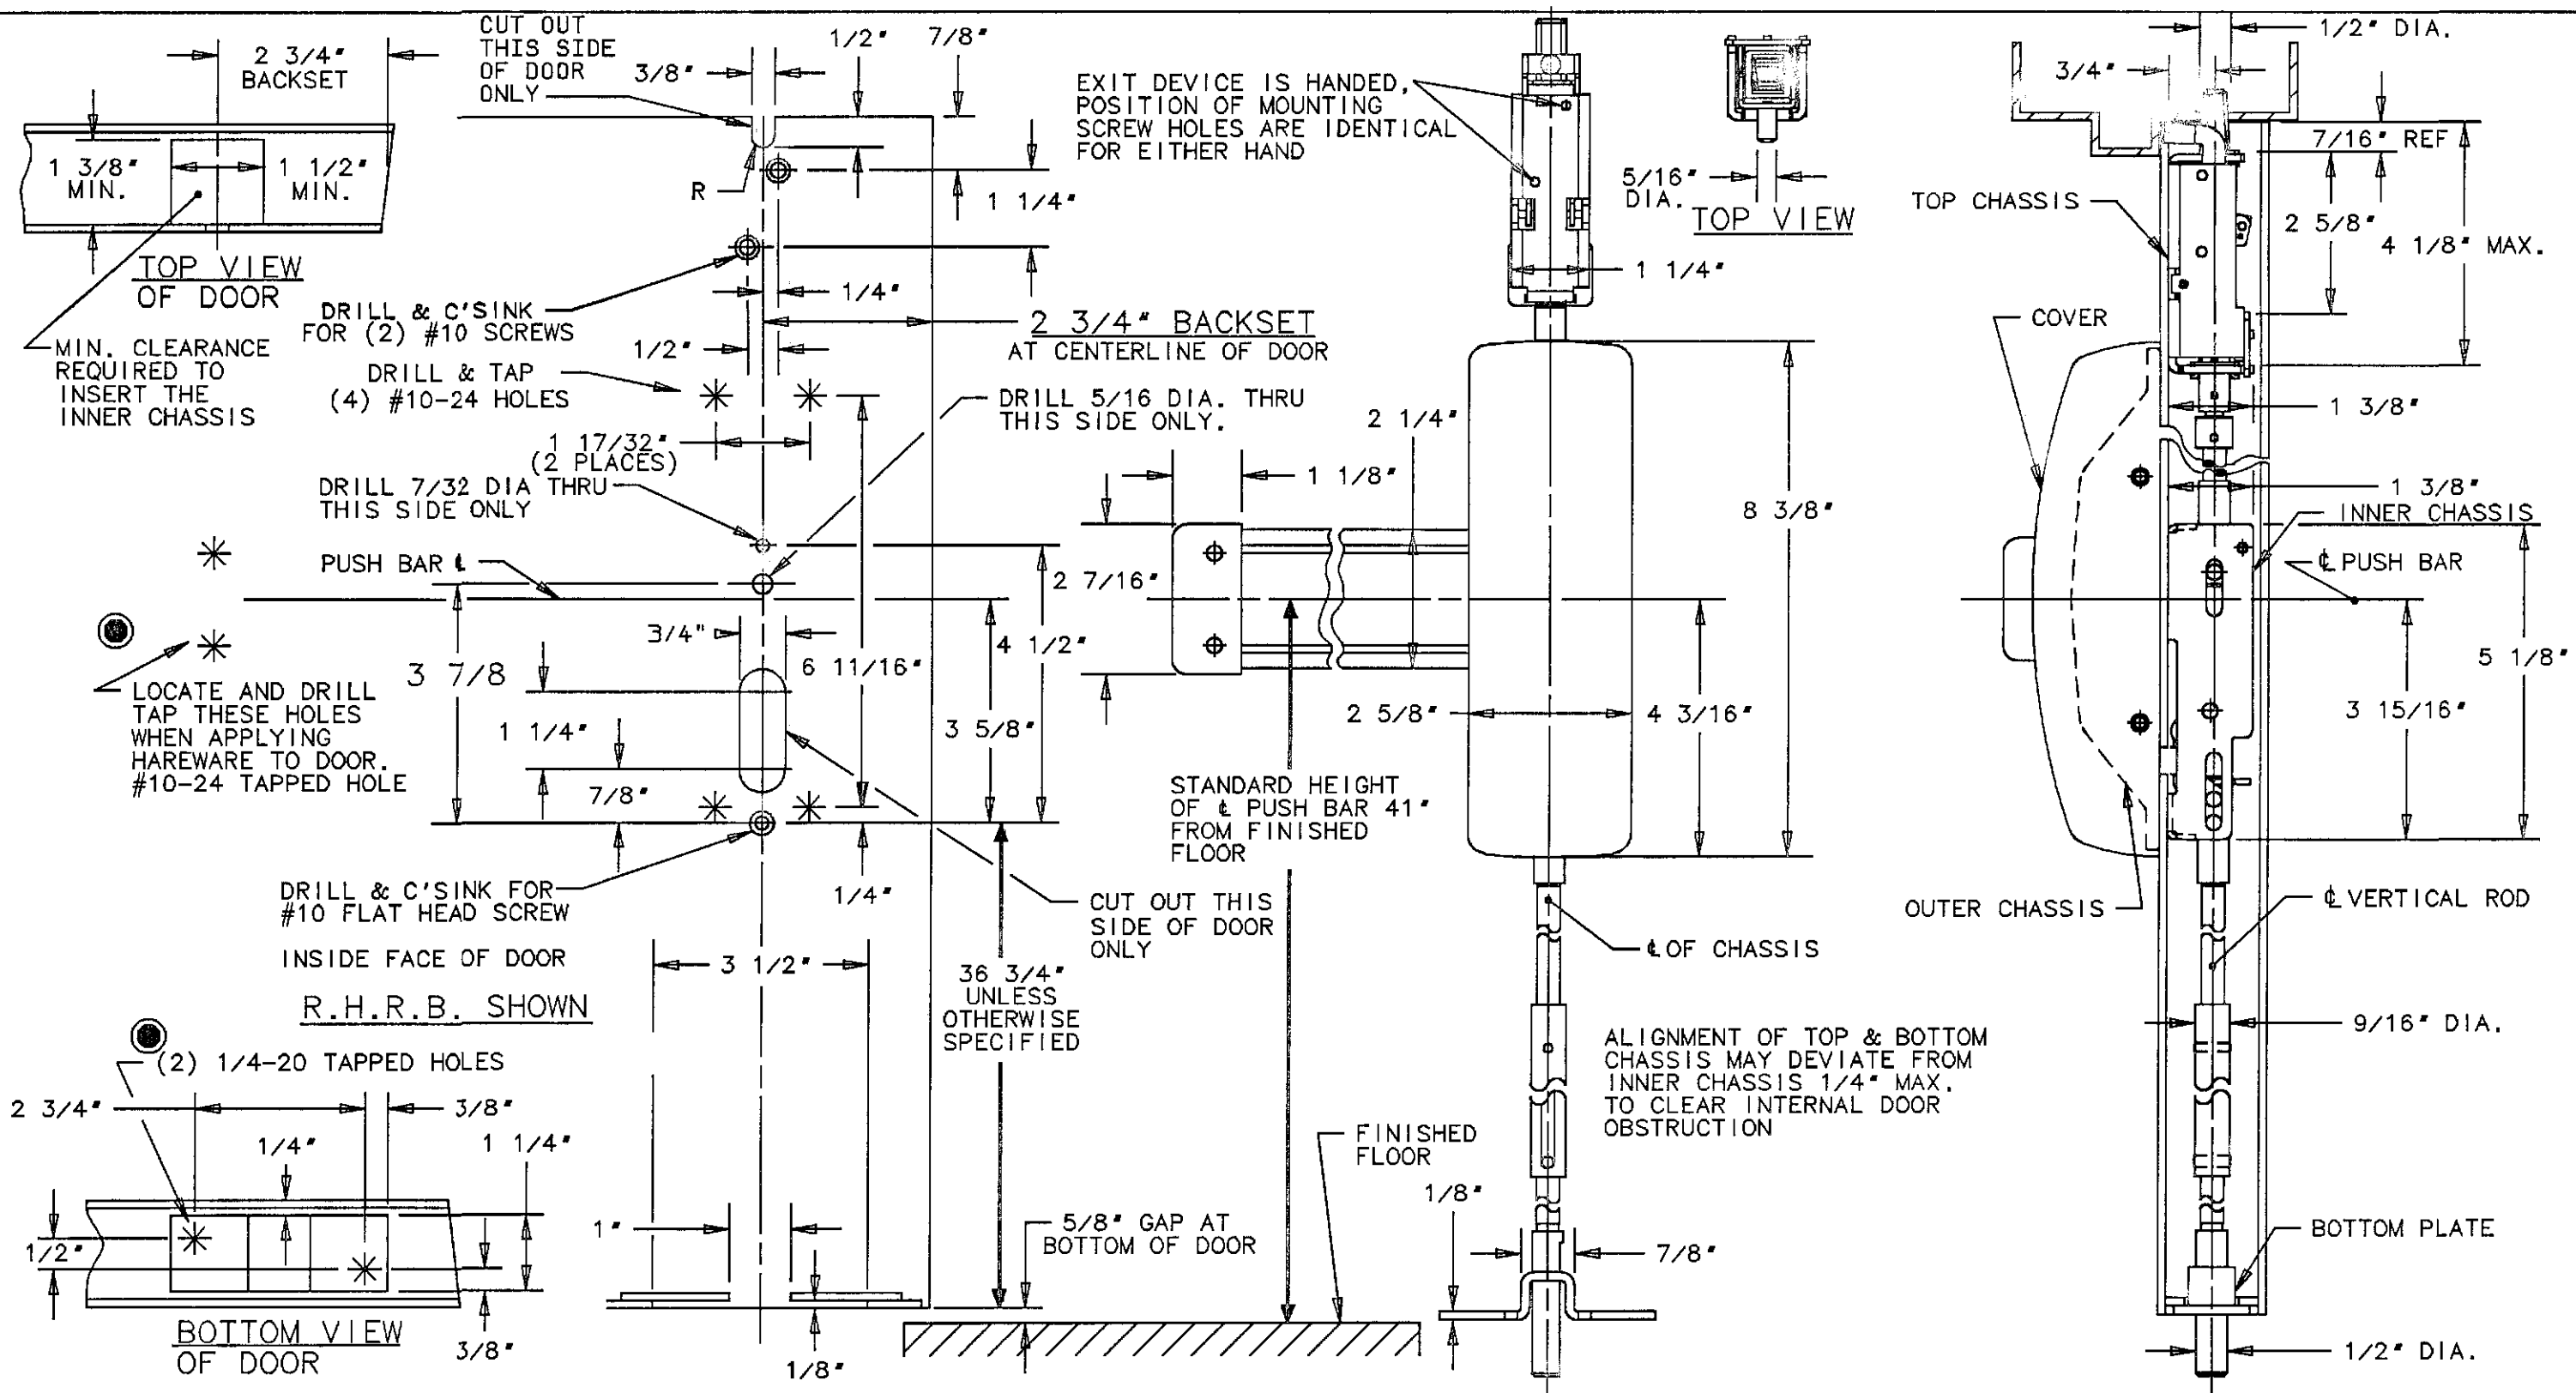

- ③ REINFORCE HOLLOW METAL DOORS FOR TOP, BOTTOM AND INNER CHASSIS WHERE HARDWARE IS TO BE ATTACHED.
- ② IF OUTSIDE PULL AND/OR OUTSIDE CONTROL IS USED, SEE APPROPRIATE METAL DOOR TEMPLATE FOR OUTSIDE DOOR PREPARATION.
- ① DOOR PREPARATION SHOWN IS FOR INSIDE OF DOOR ONLY.

- ⑦ SEE TEMPLATE No. 4569 FOR ELECTROLYNX DETAILS WHEN NEEDED.
- ⑥ TOLERANCE ON ALL FRACTIONAL DIMENSIONS $\pm 1/64"$.
- ⑤ WE RECOMMEND THAT ALL TAPPED HOLES BE DRILLED AND TAPPED IN FIELD.
- ④ SURFACE OF DOOR WHERE EXIT DEVICE IS TO BE APPLIED, MUST BE FLUSH.

SARGENT & COMPANY

NEW HAVEN, CONN. 06511

TEMPLATE: ELECTROGUARD
59-MD8600 & 12-59-MD8600
CONCEALED VERTICAL ROD EXIT
DEVICE FOR METAL DOORS
(INSIDE TRIM ONLY)

RELEASE DATE

DEC 22 04

TEMPLT NO.
4455D