



THIS STRIKE USED ON THE
DOOR ADJACENT TO THE
ONE USING A RIM EXIT
DEVICE WHEN NO MULLION
IS USED.

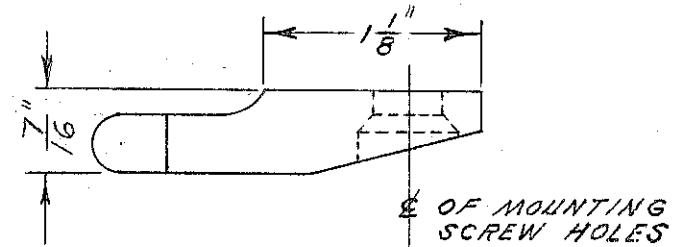


CENTERLINE
BETWEEN DOORS

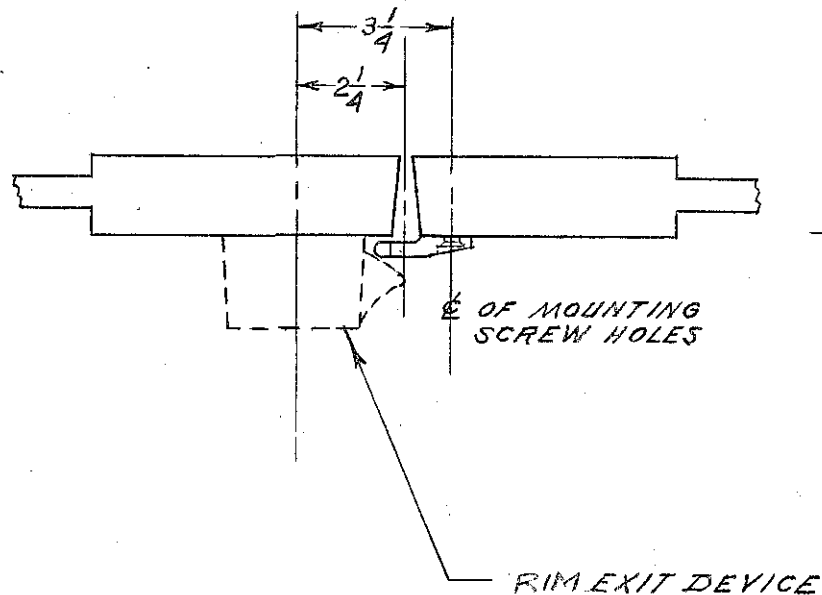

OF LATCH
BOLT

IMPORTANT
ALIGN WITH LATCH
BOLT CENTERLINE
AS SHOWN ON EXIT
DEVICE TEMPLATE

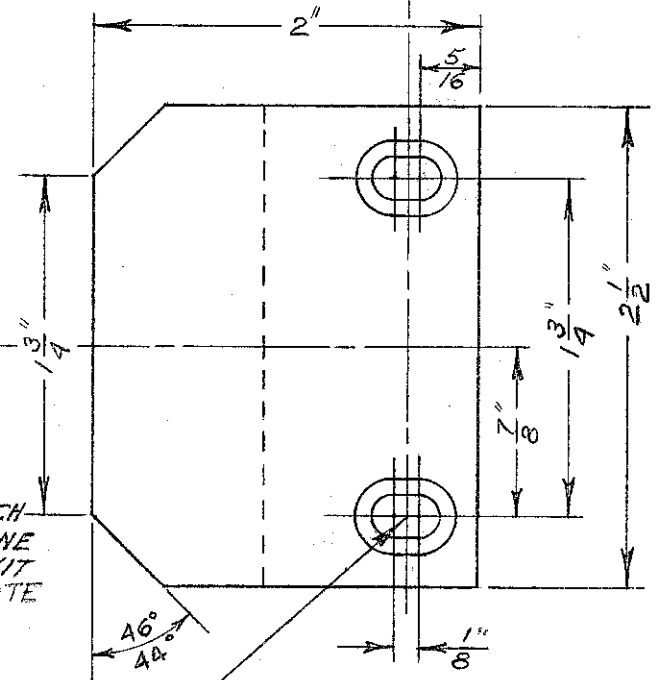

(2) #10-24 SCREWS:
WE RECOMMEND THAT THESE
HOLES BE DRILLED AND
TAPPED WHEN APPLYING STRIKE

THIS TEMPLAT DRAWING HAS BEEN ISSUED FOR REFERENCE ONLY UN-
LESS IT HAS BEEN OVERSTAMPED WITH SPECIFIC JOB IDENTIFICATION

©

① — FRACTIONAL DIM. TOL. $\pm 1/64$

©

SARGENT & COMPANY

NEW HAVEN 9, CONN.

METAL DOOR TEMPLATE:
644 DOUBLE DOOR STRIKE

RELEASE DATE
26 APR 89
TEMPLATE NO.
3996C