


METAL DOOR

SERIES	FUNCTIONS	FEATURE ⁽¹⁾ (SOLENOID)	FEATURE ⁽²⁾ (CYLINDER)	FEATURE ⁽³⁾ (54- PREFIX)	RACEWAY LOCATION
8800	773-8, 774-8	X	--	--	(A)
	54-773-8, 54-774-8	X	--	X	(A)
	775-8, 776-8	X	X	--	(A)
	54-775-8, 54-776-8	X	X	X	(A)
	ALL OTHER 54-700-8	--	SEE NOTE 2	X	(B)

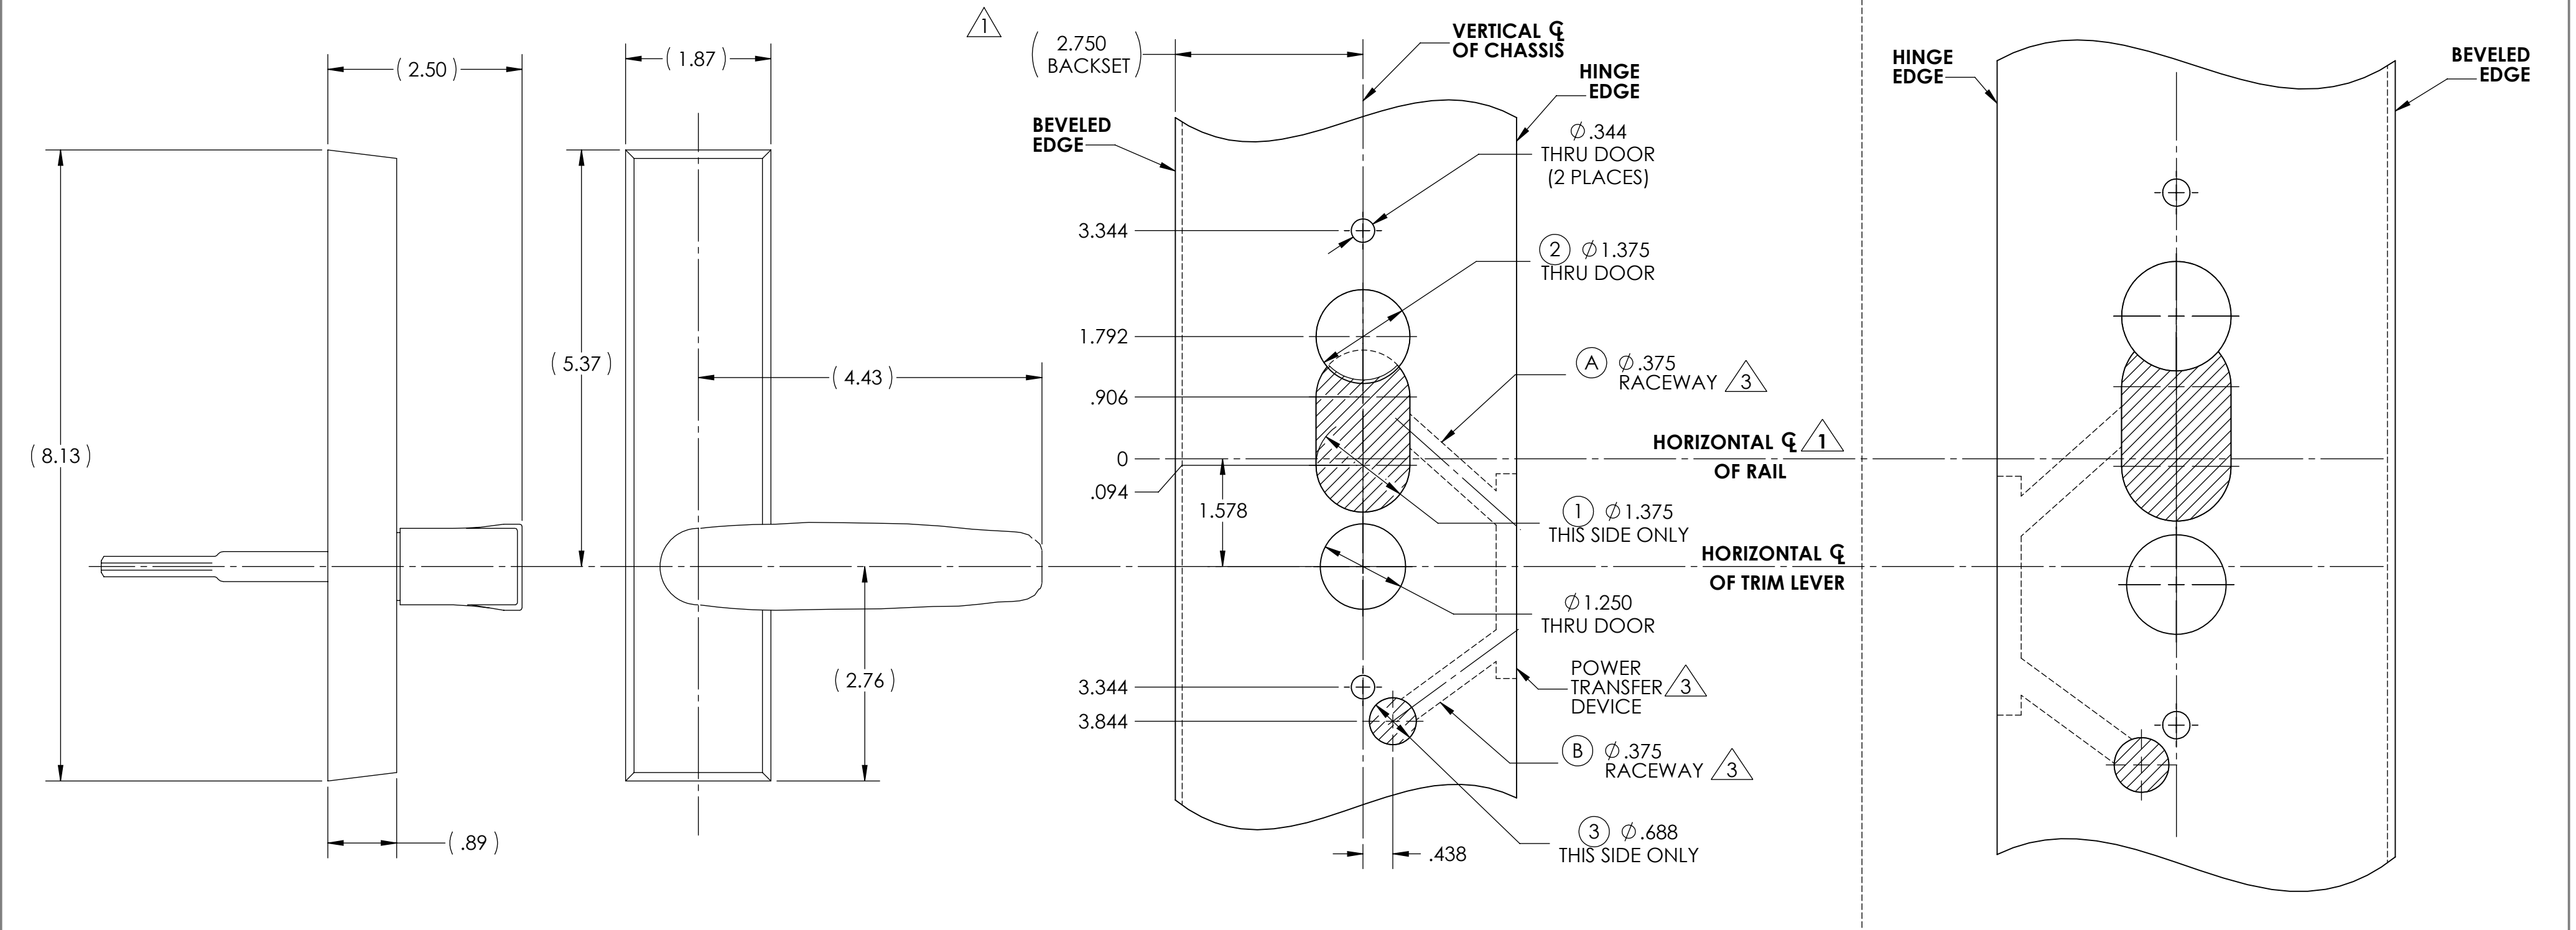

RHRB OUTSIDE OF DOOR

LHRB OUTSIDE OF DOOR

NOTES:

- FOR LOCATION OF VERTICAL CENTERLINES, HORIZONTAL CENTERLINES AND ALL ADDITIONAL EXIT DEVICES PREP. REFER TO APPROPRIATE EXIT DEVICE TEMPLATE.
- FOR ADDITIONAL "ET" TRIM DOOR PREP CUTOUTS REFER TO TEMPLATE 4414.
- a. ϕ .375 RACE WAY FOR ELECTRO LYNX APPLICATIONS REFER TO MCKINNEY TRANSFER CATALOG.
b. DOOR MANUFACTURER TO MAKE PROVISIONS TO PROTECT WIRES FROM ABRASION.
c. DOOR MANUFACTURE TO PROVIDE CLEARANCE REINFORCEMENT TO ALLOW INSERTION OF ELECTRICAL HINGE.
d. CONSULT WITH POWER TRANSFER MANUFACTURER FOR DEVICE CUTOUT.
- SUITABLE REINFORCEMENT REQUIRED FOR METAL DOORS.
- BEVEL REQUIRED (NOT SHOWN), PREP TO ANSI A115 SPECIFICATIONS.
- TOLERANCE ALL DIMENSIONS $\pm$.015.
- FOR WOOD DOOR PREP SEE SHEET 2.

AUTHORIZED PREFIXES
54

BACKSET DEFINITION	DOOR HANDING
BACKSET	L.H. INSIDE R.H.
TOP OF DOOR	OUTSIDE
VERTICAL $\bar{C}$	INSIDE
$\bar{C}$ OF BEVEL	L.H.R.B. OUTSIDE R.H.R.B

SARGENT ASSA ABLOY	Sargent Manufacturing Company 100 Sargent Drive New Haven, CT 06511
DOOR MFG TEMPLATE: 54-700-8 LEVER MONITORING "ET", & 773-8, 774-8, 775-8 & 776-8 SOLENOID OPERATED "ET" CONTROL FOR USE WITH 8800 & 12-8800 SERIES RIM TYPE EXIT DEVICES METAL DOOR (SHEET 1 OF 2)	RELEASE DATE TEMPLATE NO. 4530 E

AUTHORIZED PREFIXES
54



DOOR MFG TEMPLATE: 773-8, 774-8, 775-8 & 776-8
SOLENOID OPERATED "ET" CONTROL FOR USE
WITH 8800 & 12-8800 SERIES RIM TYPE EXIT DEVICES
WOOD DOOR (SHEET 2 OF 2)