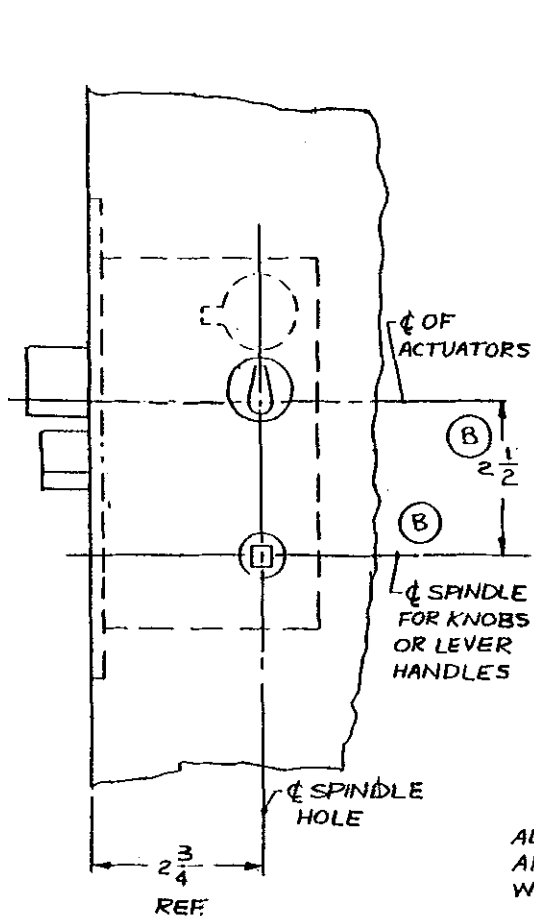


ALL OF THE ABOVE DEAD BOLT ACTUATORS ARE FASTENED TO BACK PLATE WITH A NO 6-32 MACH. SCREW

POSITION FLAT ON BACK PLATE HORIZONTALLY ON DOOR

Ø SPINDLE HOLE

1/2



Ø OF MOUNTING SCREWS

3/8

Ø OF ACTUATOR

BACK PLATE FASTEN TO DOOR WITH TWO NO 6-32x 3/8 MACH. SCREWS SEE NOTE #1

1/2 DIA. CLEARANCE HOLE REQUIRED IN DOOR

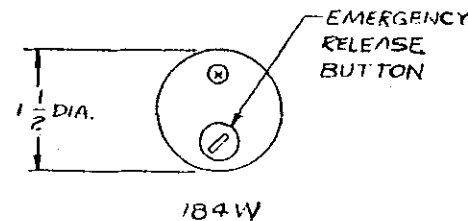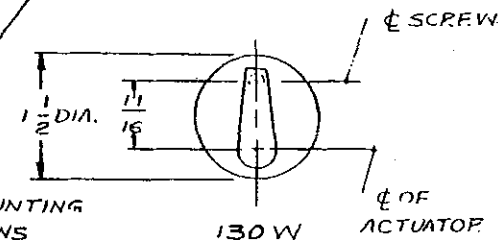

THE ABOVE DEAD BOLT ACTUATORS ARE FASTENED DIRECTLY TO THE DOOR (WITHOUT BACK PLATE) WITH A NO 6-32x 3/8 MACH. SCREW. SEE NOTE #1

- (2) REFER TO MORTISE LOCK TEMPLAT #7057 FOR DEADBOLT ACTUATORS REQUIREMENTS TO ASSURE THE CORRECT ALIGNMENT OF THE ACTUATORS TO LOCK BODY, LOCATE THE MOUNTING SCREWS AFTER LOCK IS INSTALLED IN DOOR.
- (1)

SARGENT MFG. Co.

NEW HAVEN, CONN. 06509

TEMPLATE: MORTISE LOCK FOR 7800 & 8200 SERIES TURN LEVER AND EMERGENCY RELEASE 130KB, 184KB, 130W & 184W DESIGNS

RELEASE DATE 6 DEC 95
TEMPLAT NO. 7059B

(B)

(B)