


PD30-RIM - PANIC & PD30F-RIM - FIRE LABELED NARROW RIM EXIT DEVICES WITH STANDARD ROLLER STRIKE

TEMPLATE: CAT-9704
REV. 0 04-27-23

PD30 SERIES EXIT DEVICES USING SNB OR SURFACE MOUNT FASTENERS

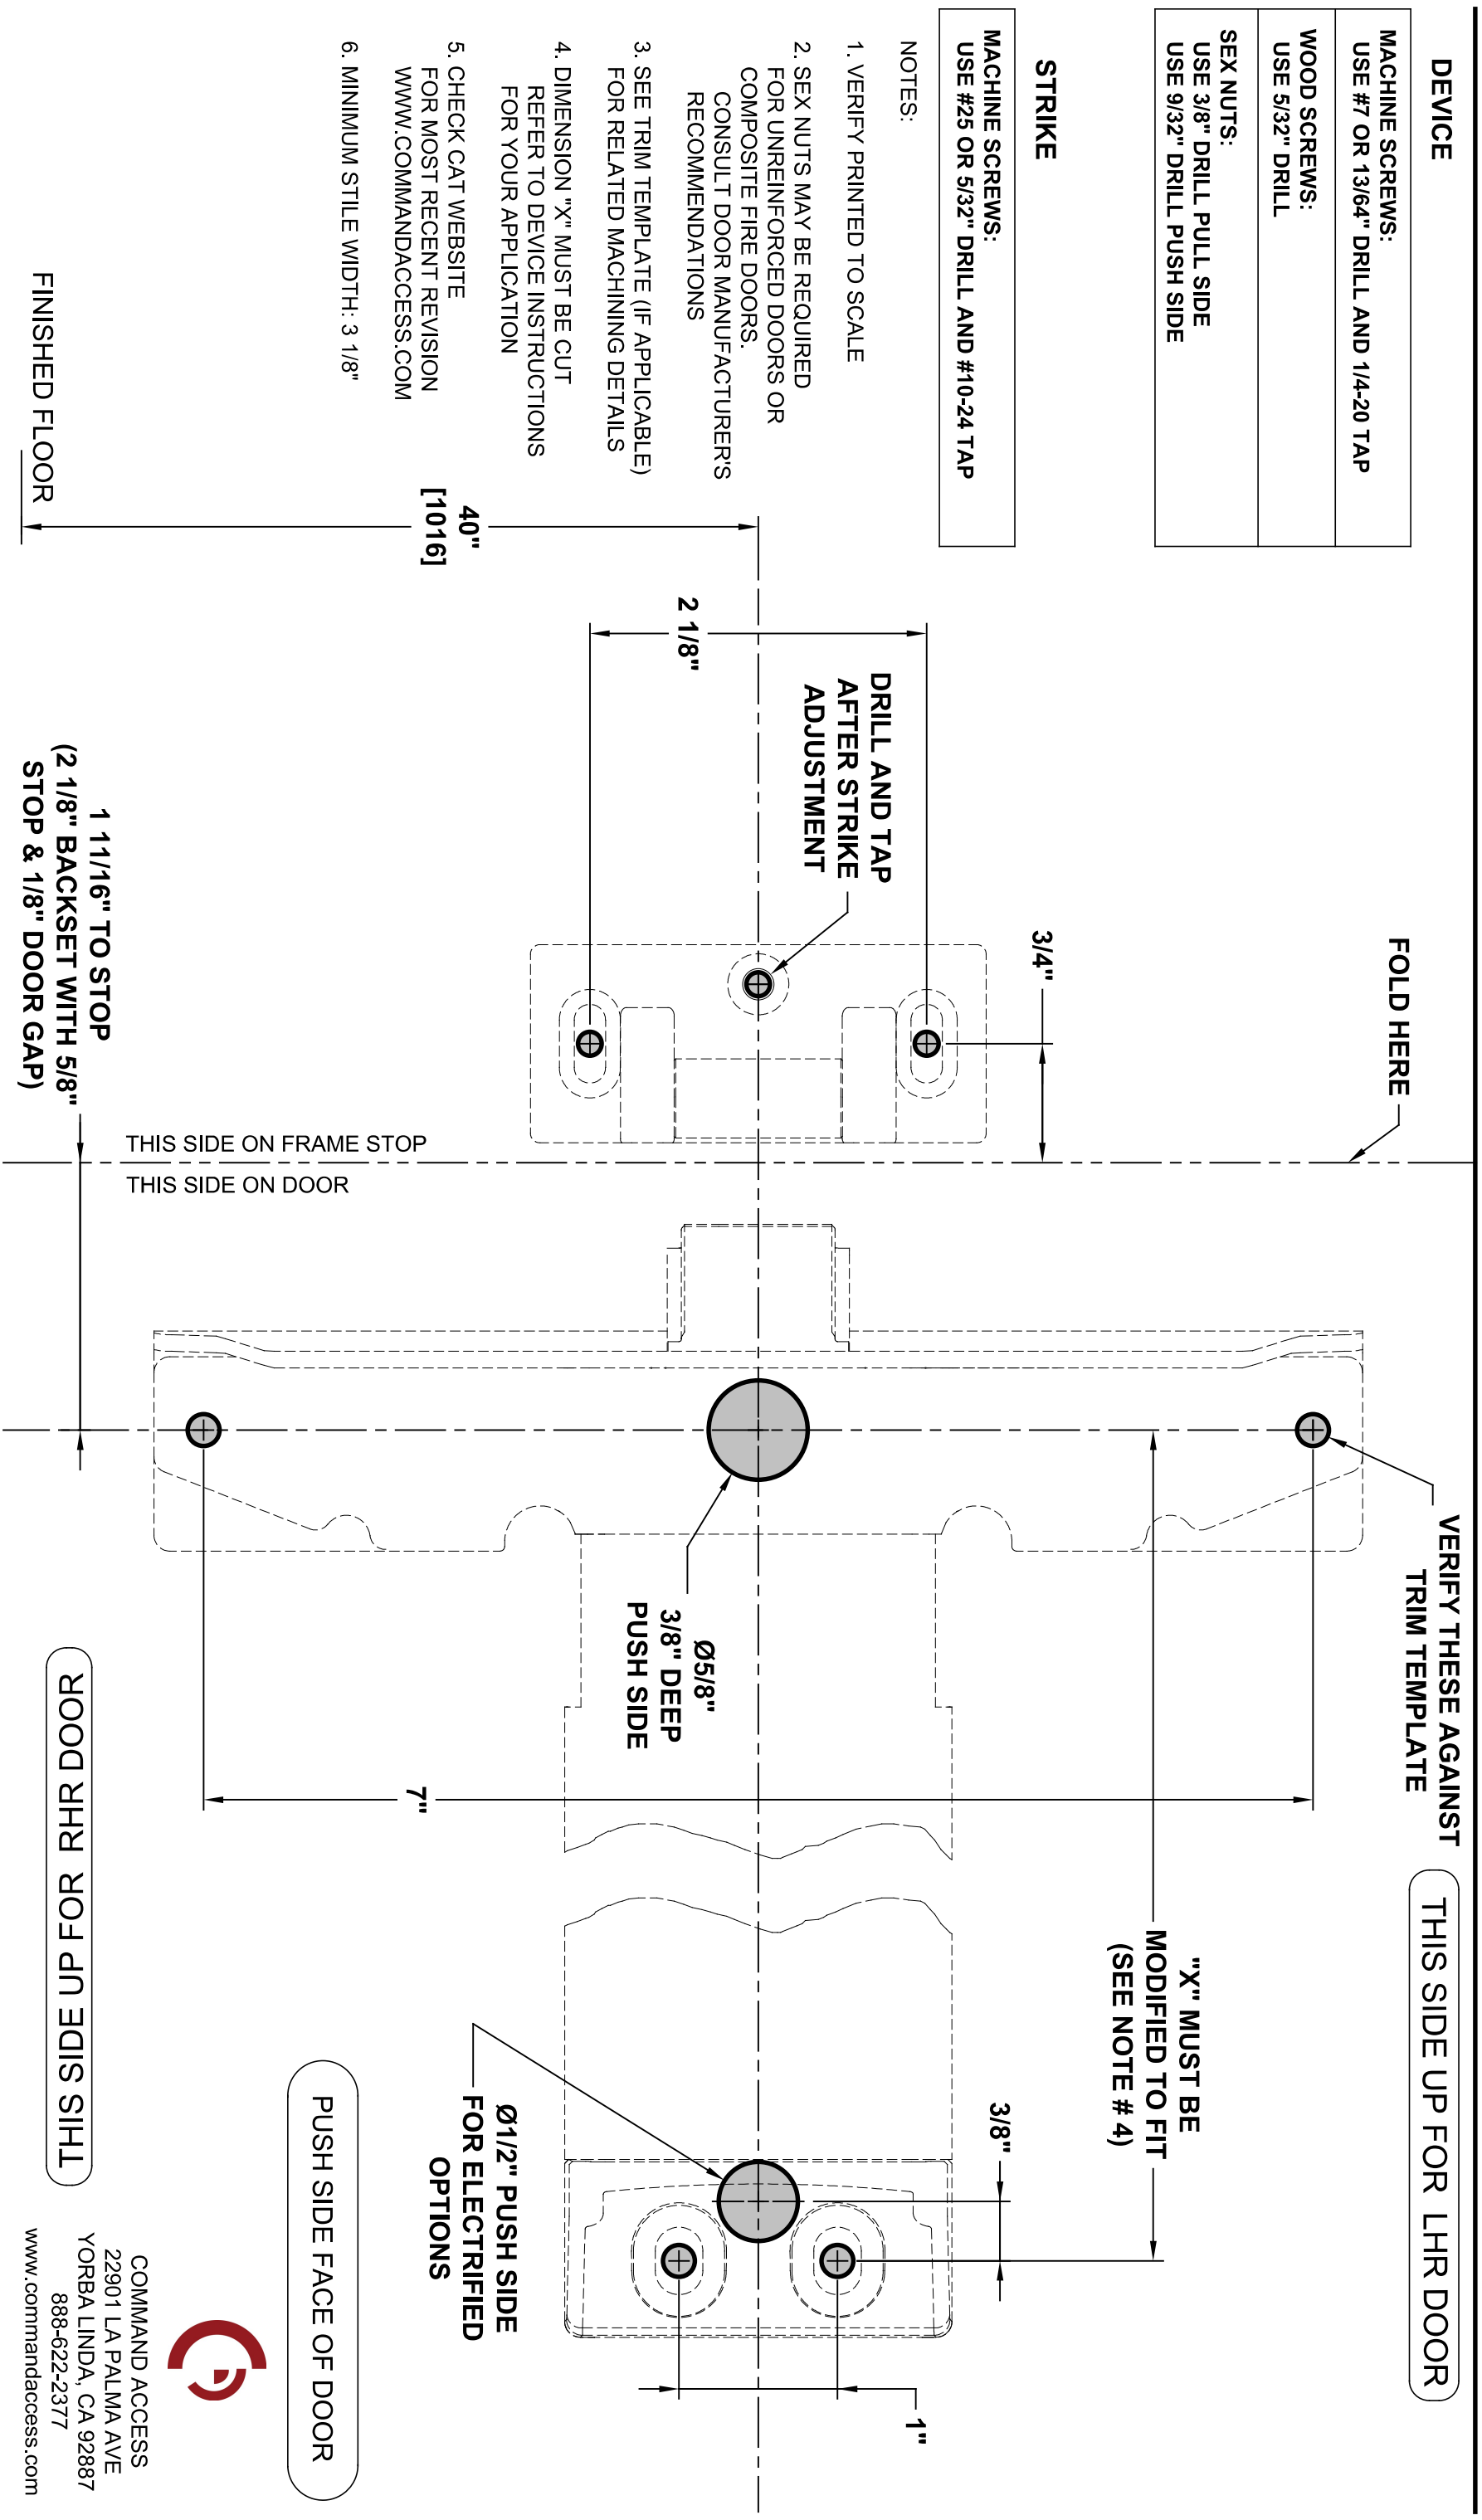

DEVICE

MACHINE SCREWS:

USE #7 OR 13/64" DRILL AND 1/4-20 TAP

WOOD SCREWS:

USE 5/32" DRILL

SEX NUTS:

USE 3/8" DRILL PULL SIDE

USE 9/32" DRILL PUSH SIDE

STRIKE

MACHINE SCREWS:

USE #25 OR 5/32" DRILL AND #10-24 TAP

NOTES:

1. VERIFY PRINTED TO SCALE
2. SEX NUTS MAY BE REQUIRED FOR UNREINFORCED DOORS OR COMPOSITE FIRE DOORS. CONSULT DOOR MANUFACTURERS RECOMMENDATIONS
3. SEE TRIM TEMPLATE (IF APPLICABLE) FOR RELATED MACHINING DETAILS
4. DIMENSION "X" MUST BE CUT REFER TO DEVICE INSTRUCTIONS FOR YOUR APPLICATION
5. CHECK CAT WEBSITE FOR MOST RECENT REVISION WWW.COMMANDACCESS.COM
6. MINIMUM STILE WIDTH: 3 1/8"



COMMAND ACCESS
22901 LA PALMA AVE
YORBA LINDA, CA 92887
888-622-2377
www.commandaccess.com