


# PD30-RIM- PANIC NARROW RIM EXIT DEVICES WITH 2700 NON-LABELLED MULLION AND PANIC STRIKE

TEMPLATE: CAT-9709  
REV. 0 04-27-23

## PD30 SERIES EXIT DEVICES USING SNB OR SURFACE MOUNT FASTENERS

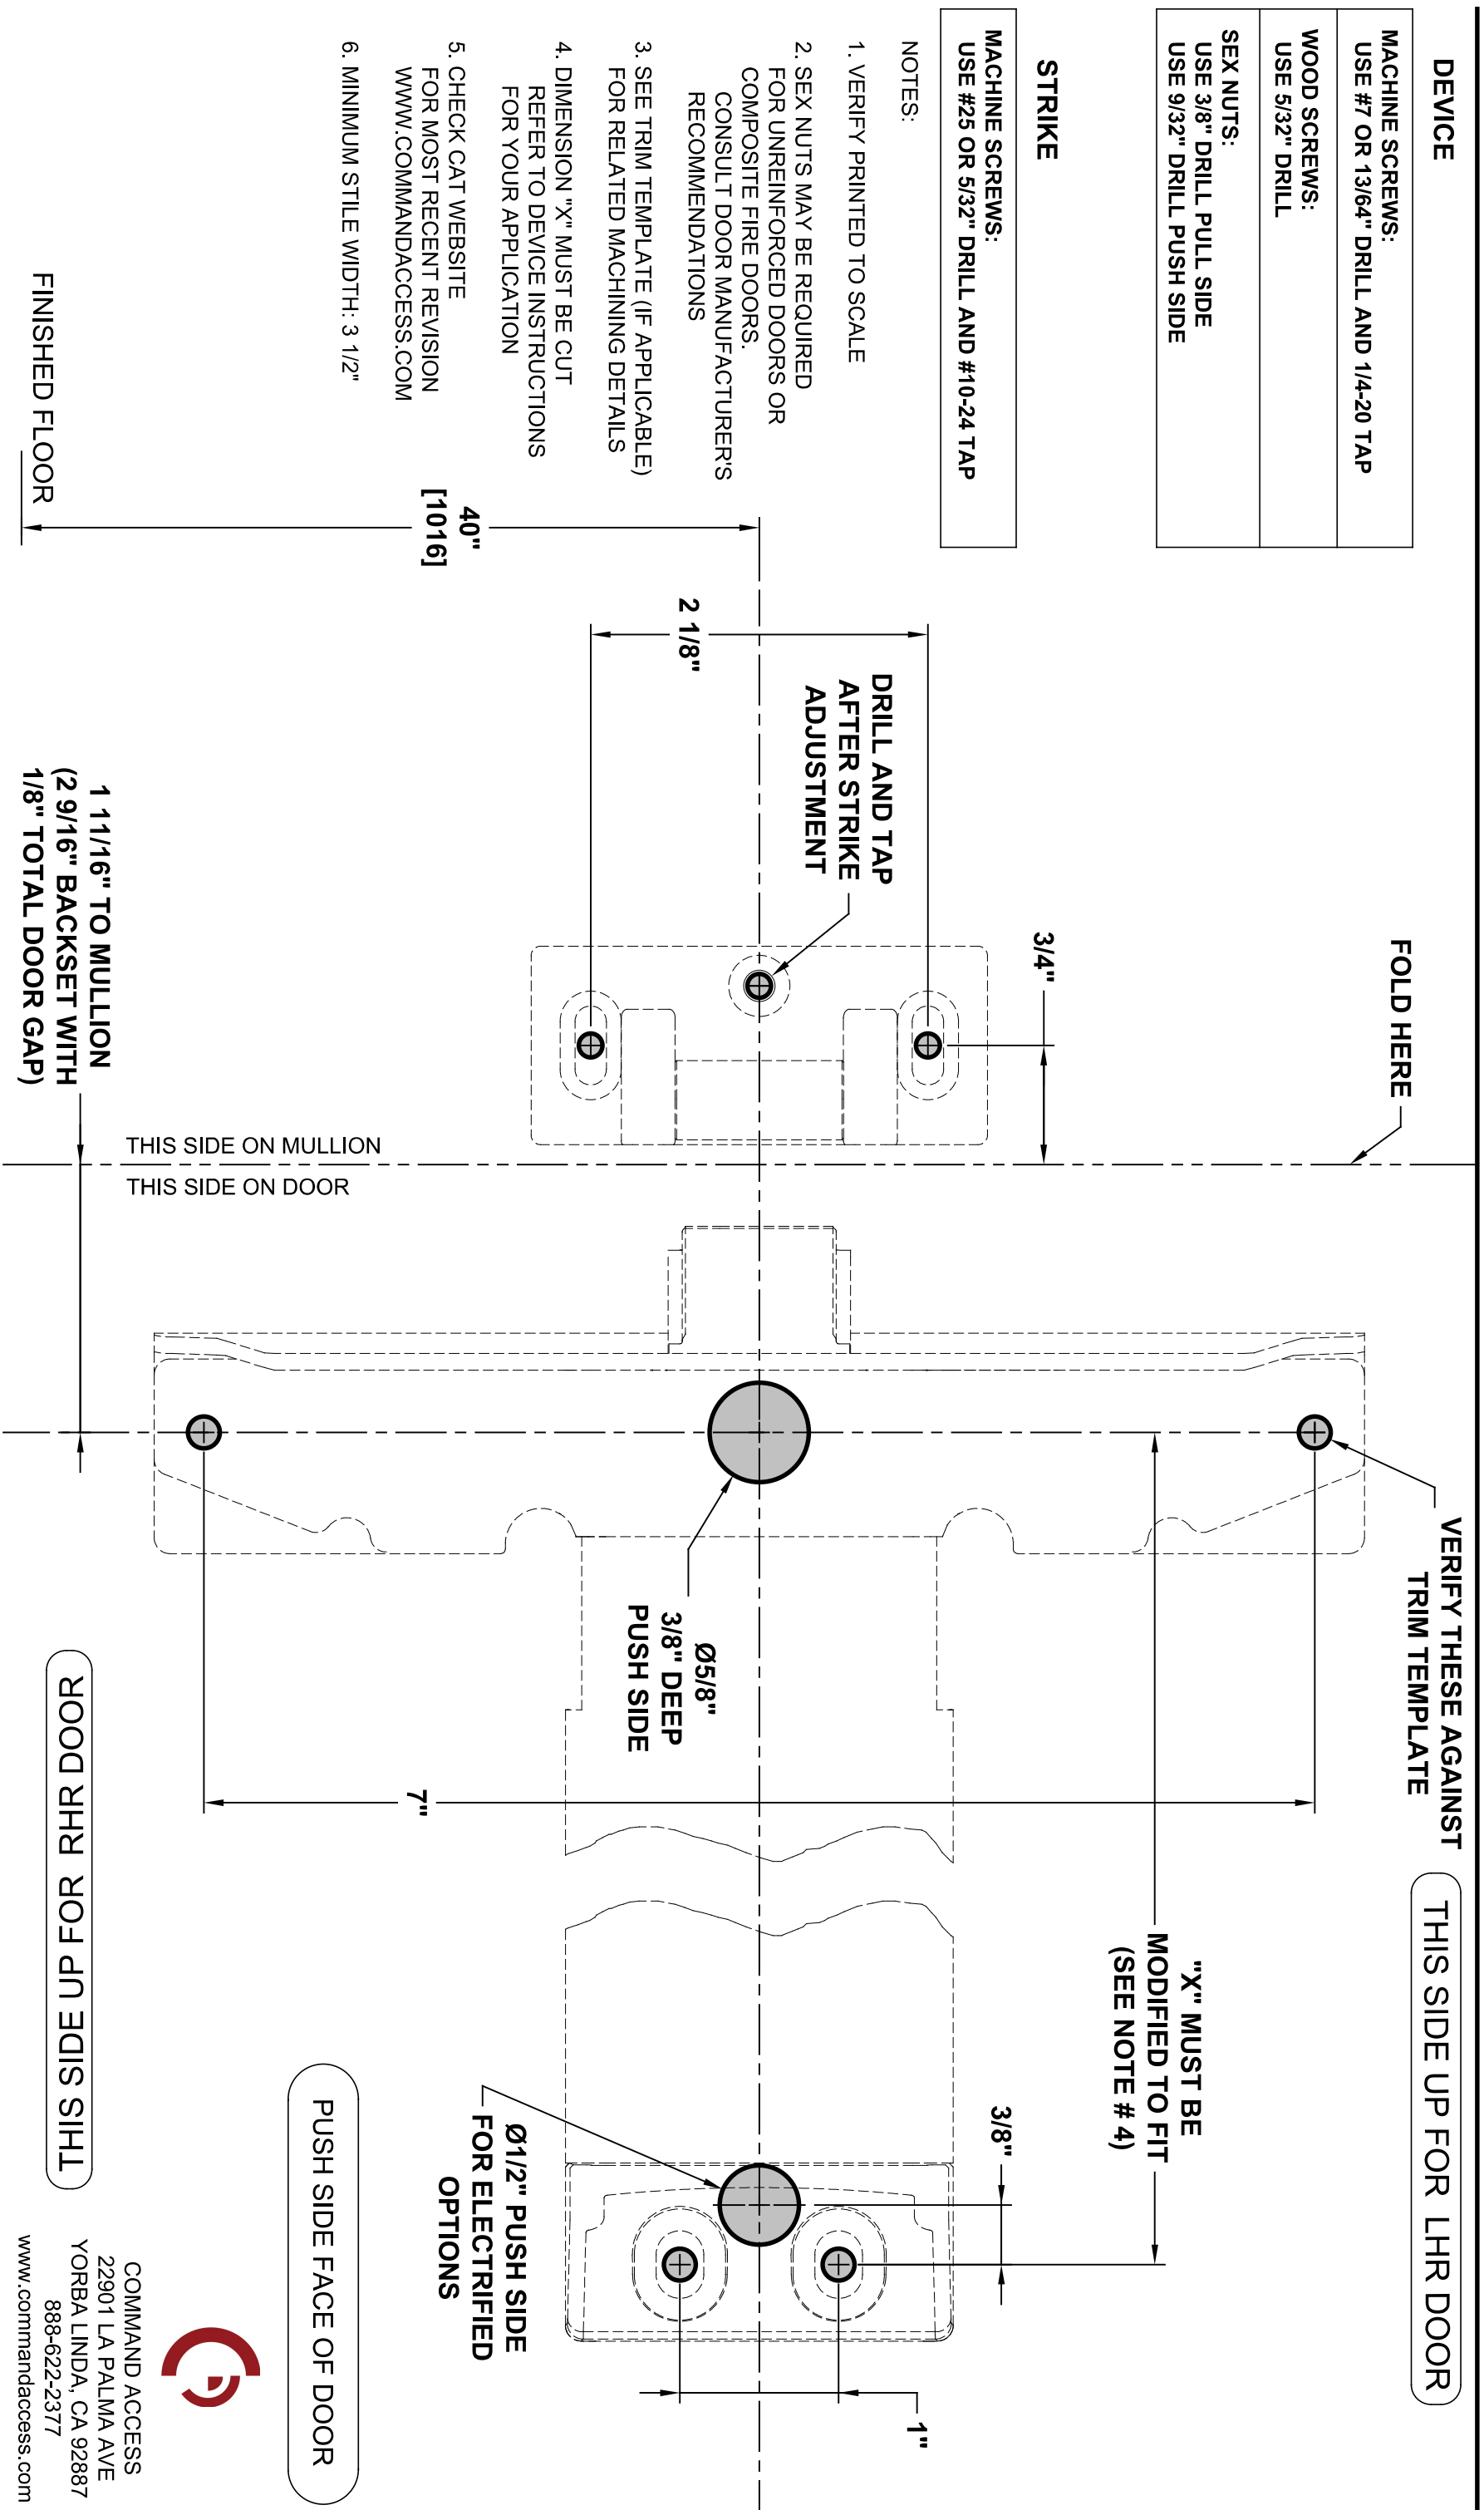

### DEVICE

#### MACHINE SCREWS:

USE #7 OR 13/64" DRILL AND 1/4-20 TAP

#### WOOD SCREWS:

USE 5/32" DRILL

#### SEX NUTS:

USE 3/8" DRILL PULL SIDE

USE 9/32" DRILL PUSH SIDE

### STRIKE

#### MACHINE SCREWS:

USE #25 OR 5/32" DRILL AND #10-24 TAP

#### NOTES:

1. VERIFY PRINTED TO SCALE
2. SEX NUTS MAY BE REQUIRED FOR UNREINFORCED DOORS OR COMPOSITE FIRE DOORS. CONSULT DOOR MANUFACTURERS RECOMMENDATIONS
3. SEE TRIM TEMPLATE (IF APPLICABLE) FOR RELATED MACHINING DETAILS
4. DIMENSION "X" MUST BE CUT REFER TO DEVICE INSTRUCTIONS FOR YOUR APPLICATION
5. CHECK CAT WEBSITE FOR MOST RECENT REVISION [WWW.COMMANDACCESS.COM](http://WWW.COMMANDACCESS.COM)
6. MINIMUM STILE WIDTH: 3 1/2"

VERIFY THESE AGAINST TRIM TEMPLATE

THIS SIDE UP FOR LHR DOOR

"X" MUST BE MODIFIED TO FIT (SEE NOTE # 4)

Ø1/2" PUSH SIDE FOR ELECTRIFIED OPTIONS

PUSH SIDE FACE OF DOOR

THIS SIDE ON MULLION  
THIS SIDE ON DOOR

1 11/16" TO MULLION (2 9/16" BACKSET WITH 1/8" TOTAL DOOR GAP)



COMMAND ACCESS  
22901 LA PALMA AVE  
YORBA LINDA, CA 92887  
888-622-2377  
[www.commandaccess.com](http://www.commandaccess.com)