

SECTION A-A

9



.234

(1.250)

(2.750)

(4.563)

CL OF BEVEL

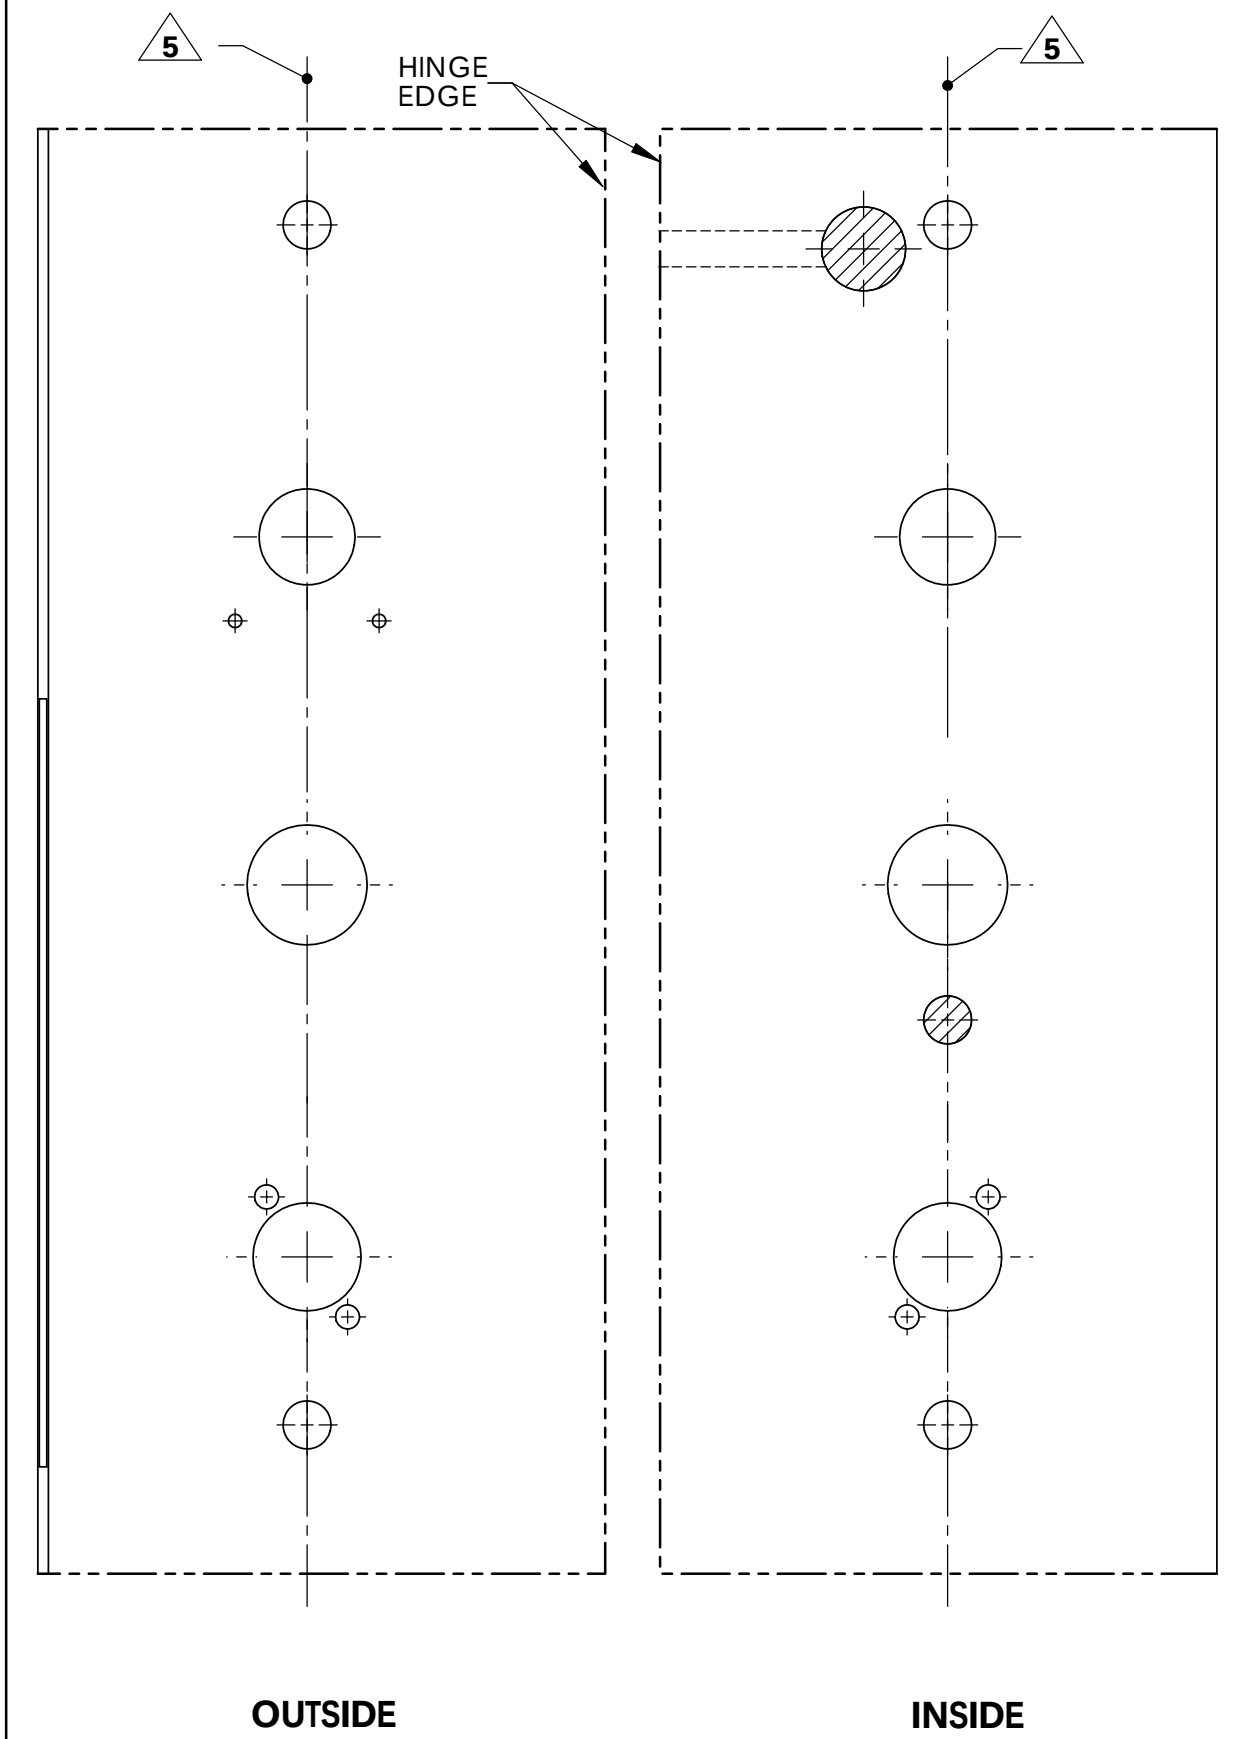
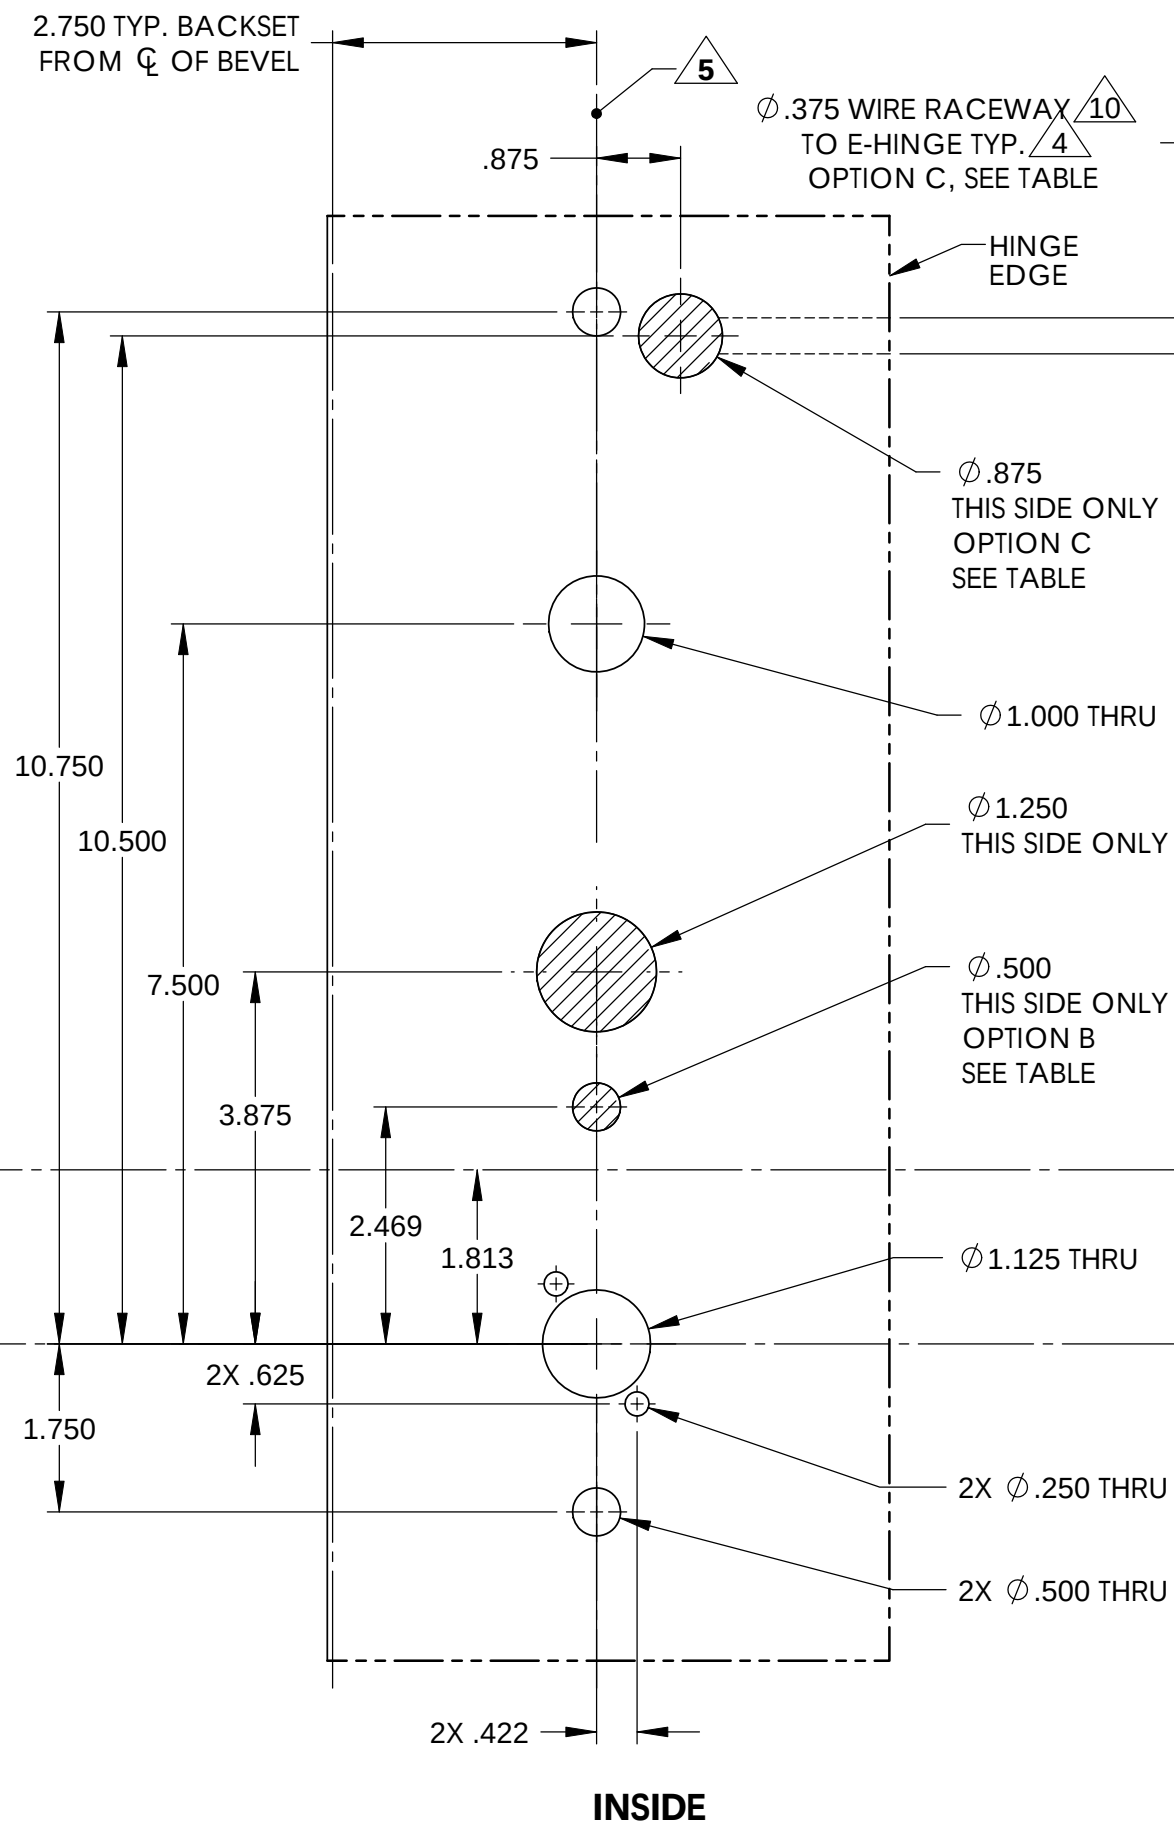


R.H. DOOR

-
- Technical drawings of the Outside Left Hand (O/S L.H.) and Inside Left Hand (I/S L.H.) trim for a door lock assembly.
- Dimensions:**
- (3.813)
 - (11.250)
 - (13.498)
- Labels:**
- O/S TRIM
 - I/S TRIM
 - O/S LEVER
 - I/S LEVER
 - CL OF STRIKE
 - CL OF LOCKBODY
 - CL OF LEVERS
- Reference Markers:** 5, 6, 12, 13
- OUTSIDE L.H. TRIM SHOWN**
- INSIDE L.H. TRIM SHOWN**

<u>SARGENT</u> <u>ASSA ABLOY</u>		Sargent Manufacturing Company 100 Sargent Drive New Haven, CT 06511	
DOOR MANUFACTURERS TEMPLATE: PROFILE SERIES TRIM METAL DOOR 8200 MORTISE LOCK		RELEASE DATE	21-NOV-11
		TEMPLATE NO.	4533 D

Technical drawing of a shaft and housing assembly, Section A-A. The shaft has a diameter of $.218^{+.025}_{-.000}$ inches. The housing has an inner diameter of $(.4563)$ inches. The shaft is inserted into the housing, and the assembly is shown in cross-section. The shaft is labeled "SECTION A-A" and the housing is labeled "CL OF BEVEL".

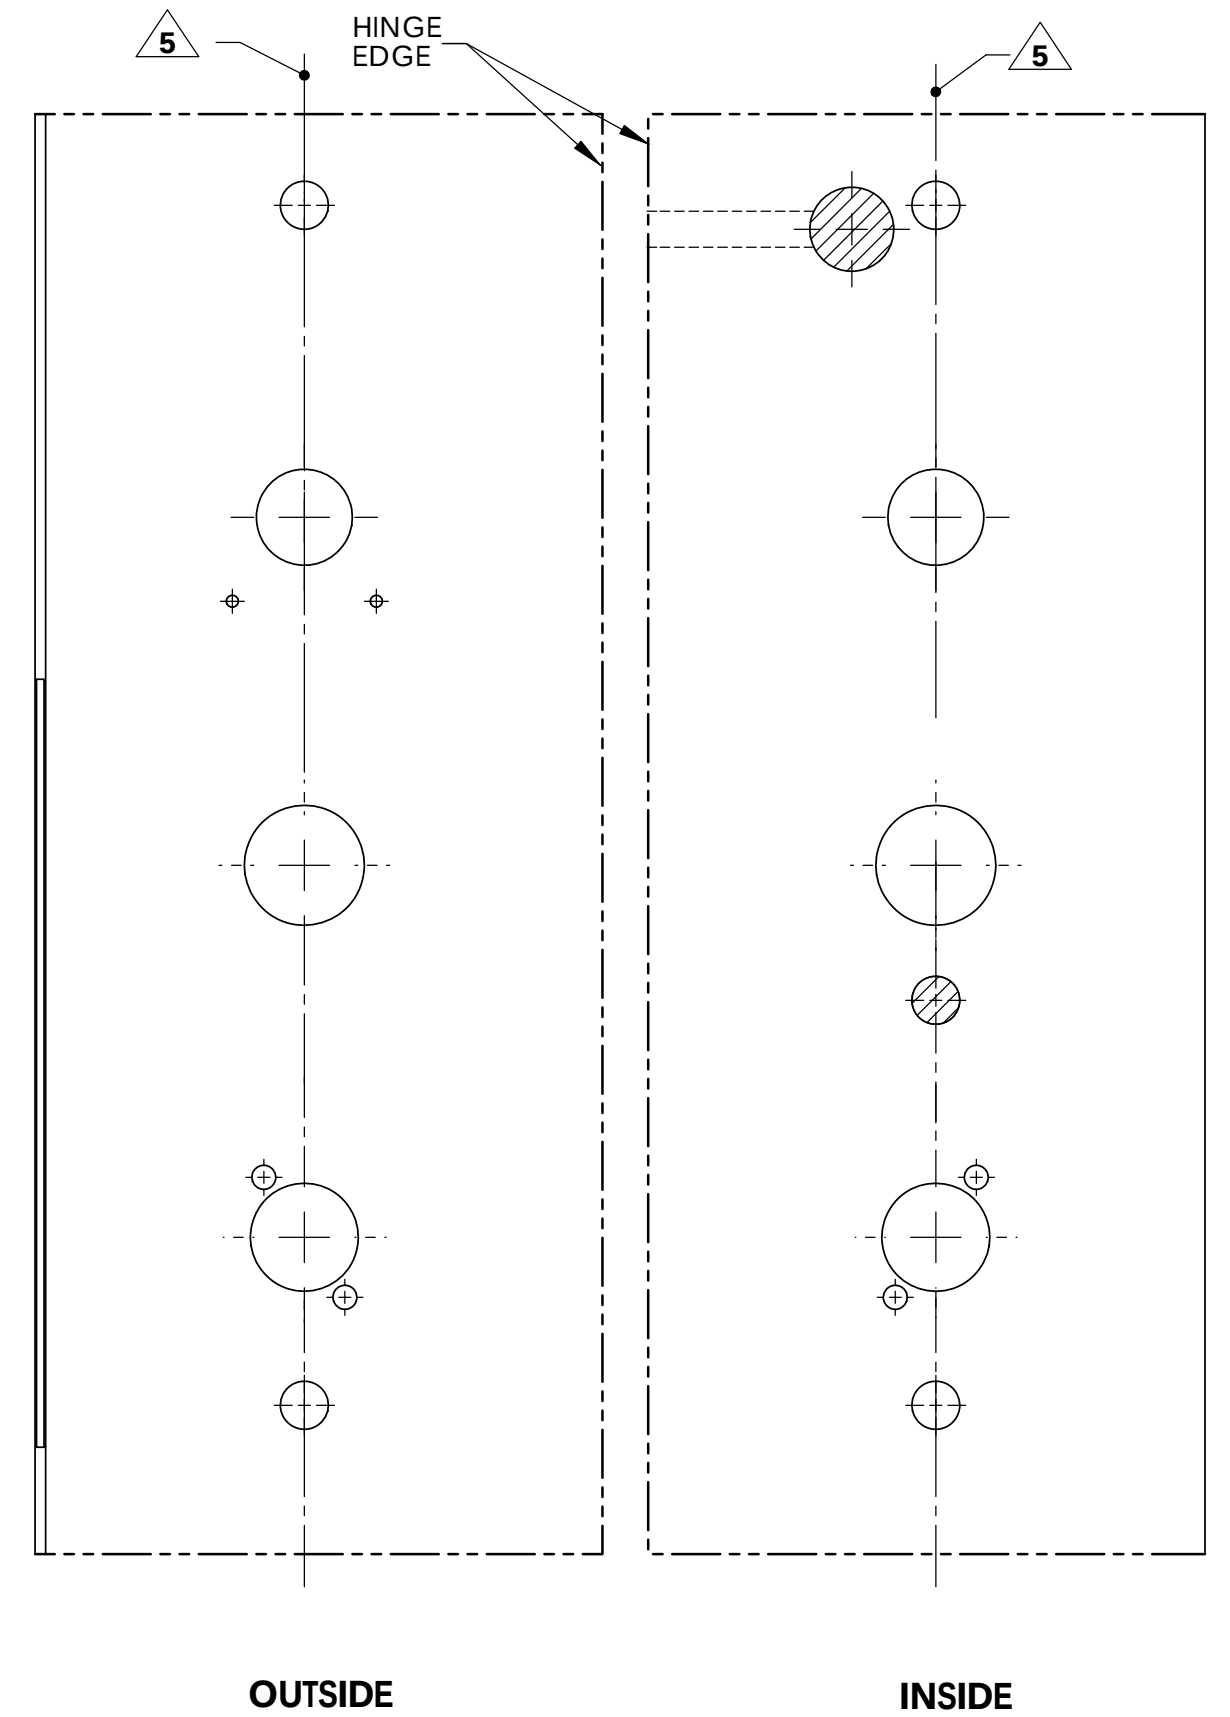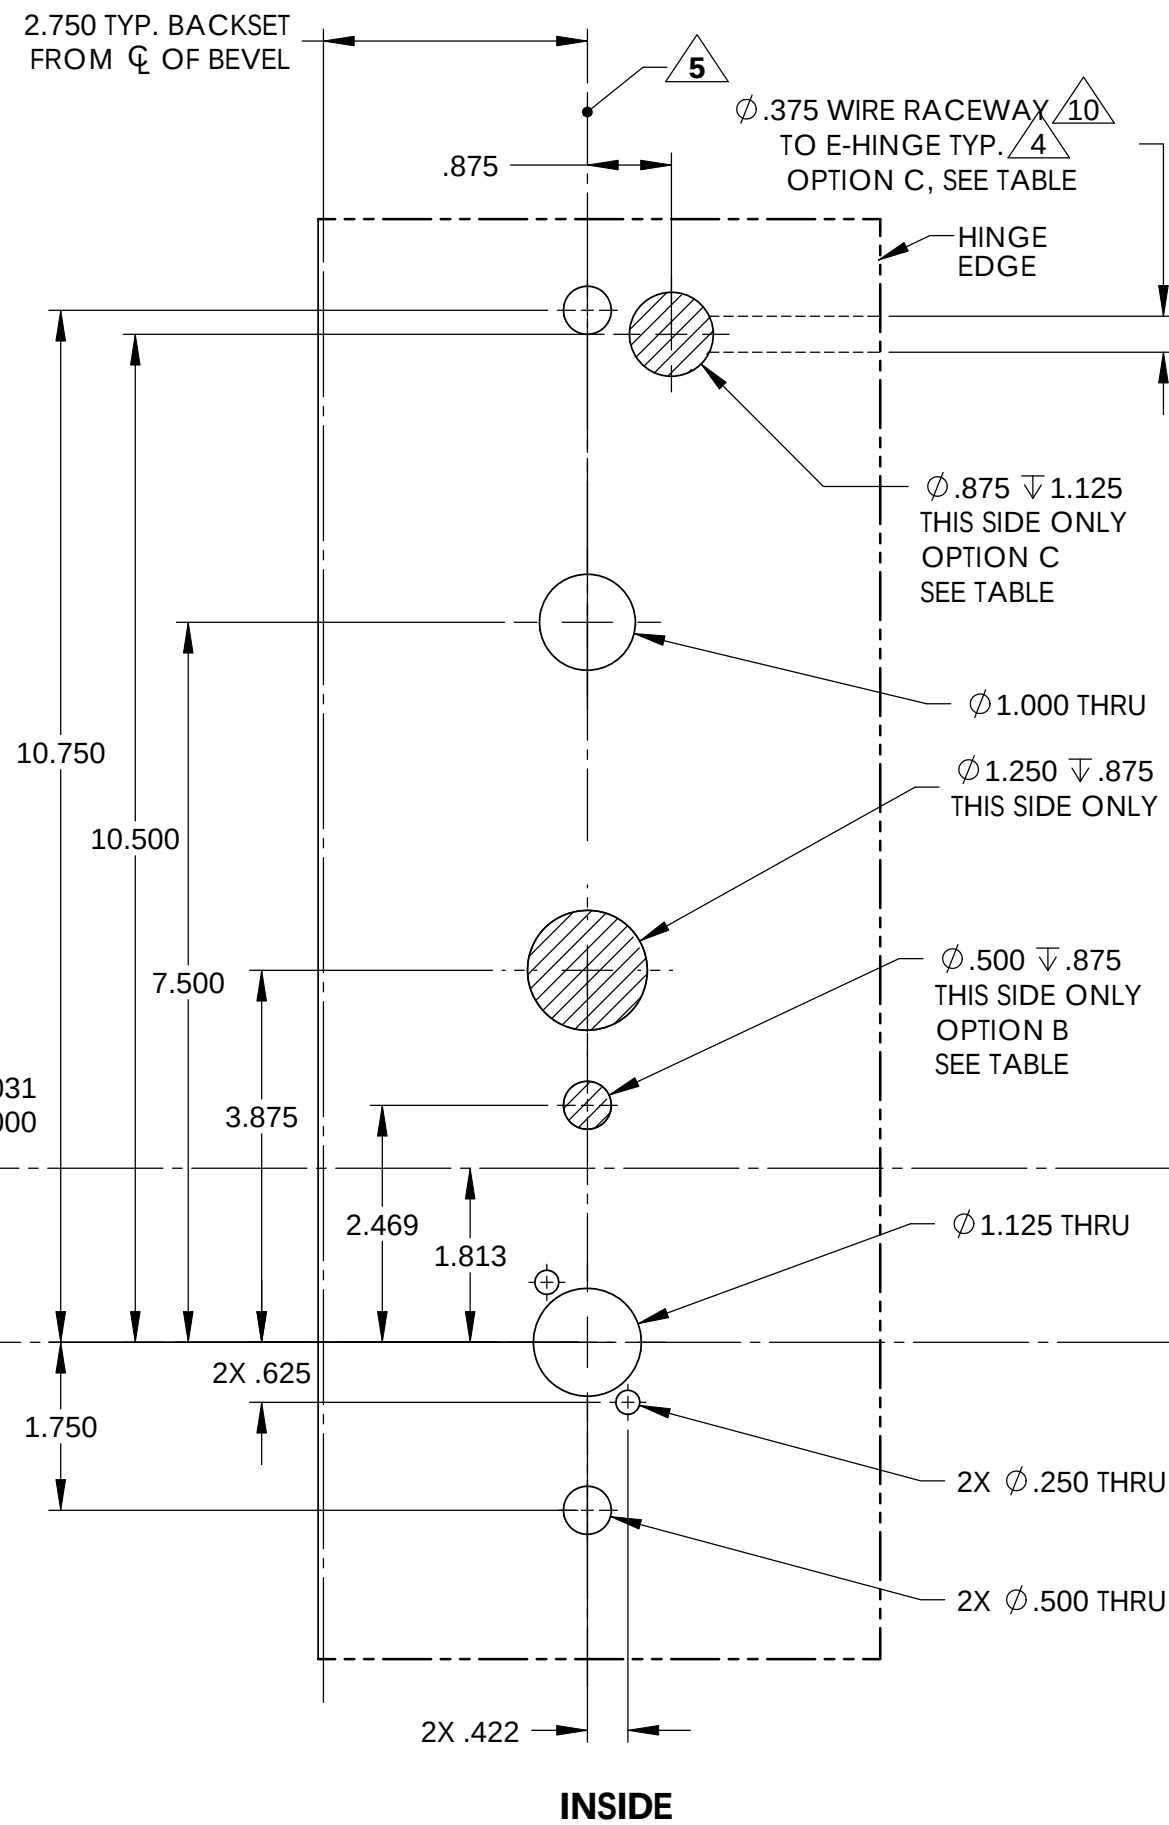

R.H. DOOR

-
- Technical drawings of the Outside Left Hand (O/S L.H.) and Inside Left Hand (I/S L.H.) trim for a door lock assembly.
- Dimensions (in parentheses):**
- (3.813)
 - (11.250)
 - (13.498)
- Labels and Features:**
- O/S TRIM
 - I/S TRIM
 - O/S LEVER
 - I/S LEVER
 - CL OF STRIKE
 - CL OF LOCKBODY
 - CL OF LEVERS
- Surface Finish Symbols:**
- 5
 - 6
- Trim Shown:**
- OUTSIDE L.H. TRIM SHOWN 12 13
 - INSIDE L.H. TRIM SHOWN 12 13

OPTIONS TABLE					
OPTION	DESCRIPTION	USED FOR FUNCTIONS			
		82276	82277	82278	82279
A	CYLINDER	X	-	X	-
B	THUMB TURN	X	X	-	-
		USED FOR PREFIXES			
		N1-, S1-, 91-		ALL OTHERS	
C	HARDWARE	X		-	

BACKSET DEFINITION	DOOR HANDING

<u>SARGENT</u> <u>ASSA ABLOY</u>		Sargent Manufacturing Company 100 Sargent Drive New Haven, CT 06511	
DOOR MANUFACTURERS TEMPLATE: PROFILE SERIES TRIM WOOD DOOR 8200 MORTISE LOCK		RELEASE DATE	21-NOV-11
		TEMPLATE NO.	4533 D