


INSTRUCTIONS FOR INSTALLING **SARGENT** 5100 SERIES ALARMED EXIT LOCK USING OB KNOB OUTSIDE TRIM, OR LL LEVER HANDLE TRIM.

CAUTION: BEFORE STARTING


- * DOOR SHOULD BE FITTED AND HUNG.
- * CHECK HAND - CHASSIS IS NORMALLY ASSEMBLED FOR A RIGHT HAND REVERSE BEVEL DOOR AT THE FACTORY.

TO CHANGE HAND


1. REMOVE RETAINING RING AND CYLINDER HUB.
2. REMOVE LEFT PIVOT PIN FIRST, THEN REMOVE THE RIGHT PIVOT PIN AND LATCH BOLT LEVER.
3. REASSEMBLE PARTS IN REVERSE ORDER




CAUTION: FOR LHRB INSTALL CYL. HUB WITH FLAT FACING LATCH BOLT FACE OF THE CHASSIS

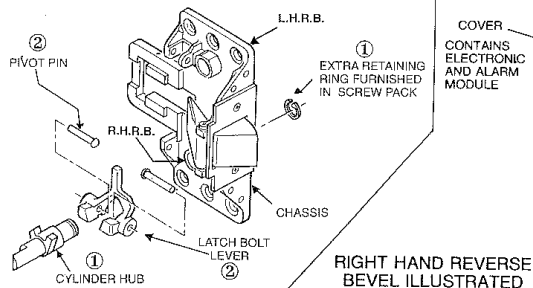


RIGHT HAND REVERSE BEVEL ILLUSTRATED

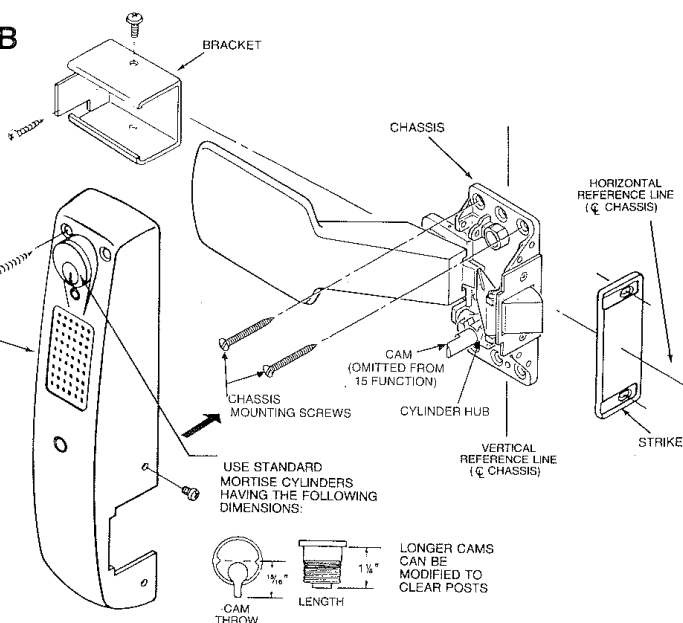


A MARK VERTICAL AND HORIZONTAL REFERENCE LINES ON DOOR

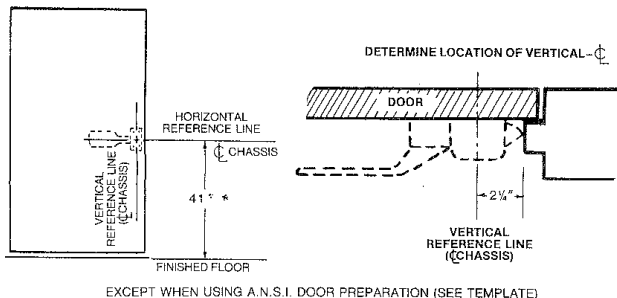


B PREPARE DOOR

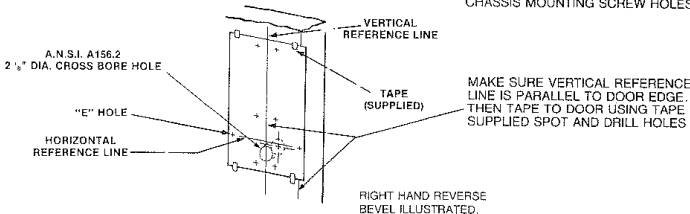

C APPLY HARDWARE

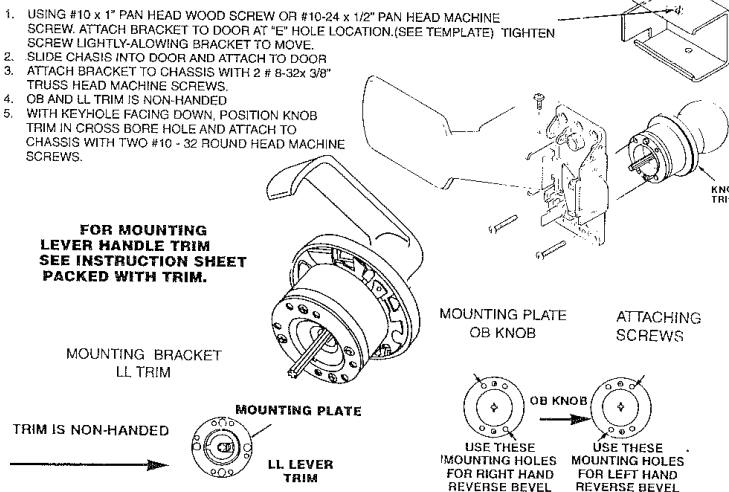

D ASSEMBLE CYLINDER

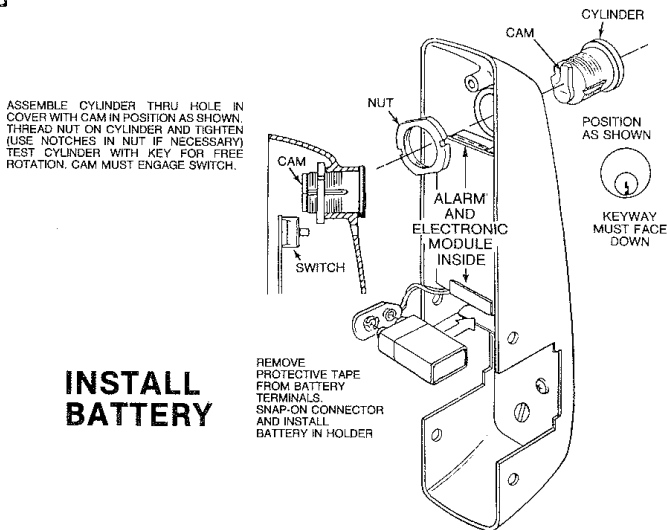

E MOUNT COVER AND STRIKE*

