


INSTALLATION INSTRUCTIONS FOR USING THE SARGENT #6013 PADLOCK WEATHER SHIELD KIT

For installation assistance call SARGENT at 1-800-727-5477 • www.sargentlock.com

SARGENT®

ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

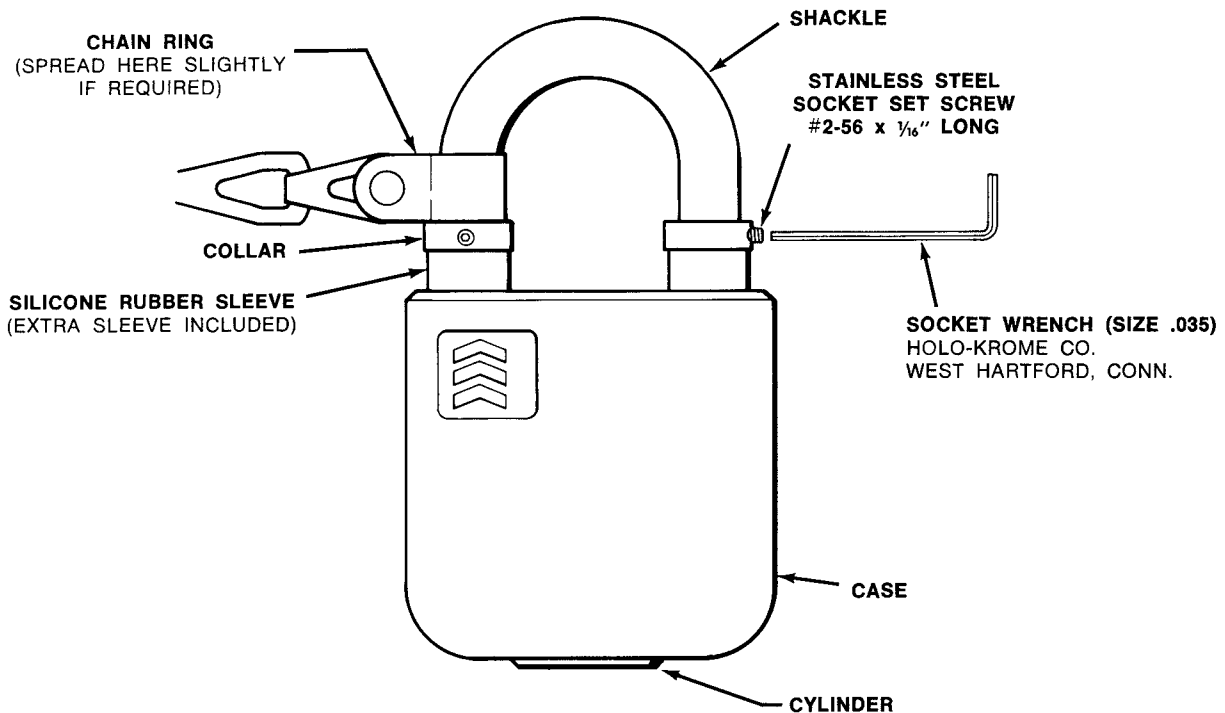

- A. OPEN PADLOCK AND REMOVE SHACKLE CHAIN, IF ANY. (IF CHAIN RING DOES NOT SLIDE OFF FREELY — SPREAD SLIGHTLY WITH A SMALL SCREW DRIVER). DO NOT REMOVE RIVET.
- B. SLIDE ONE SILICONE RUBBER SLEEVE THEN ONE COLLAR ONTO AND AROUND SHACKLE BEND. **LEAVE LOOSE.**
- C. REPLACE CHAIN AND SQUEEZE CHAIN RING TIGHT AGAIN.
- D. SLIDE SECOND COLLAR THEN SECOND RUBBER SLEEVE ONTO SHACKLE. **LEAVE LOOSE.**
- E. CLOSE SHACKLE AND PRESS DOWN ON COLLARS UNTIL RUBBER SLEEVES ARE **IN FULL CONTACT WITH CASE.** RETAIN THIS SETTING BY TIGHTENING SET SCREWS WITH WRENCH PROVIDED. OPEN AND CLOSE SHACKLE TO CHECK THAT RUBBER SLEEVES SEAL PROPERLY AND DO NOT INTERFERE WITH NORMAL CLOSING ACTION.

NOTE —

- SHACKLE SHIELDS WILL PASS THROUGH A 1/2" DIAM. HOLE.
- AFTER INSTALLING SHIELDS MAKE SURE PADLOCK IS AS DRY AS POSSIBLE INTERNALLY. IF COMPRESSED AIR IS AVAILABLE, BLOW OUT TRAPPED MOISTURE BY INSERTING HOSE INTO SHACKLE HOLE. FLOOD CYLINDER WITH LIQUID GRAPHITE TO DEMOISTURIZE.
- **PROTECTION IS PROVIDED WHEN SHACKLE IS CLOSED AND PADLOCK CASE HANGS DOWN. DO NOT LEAVE SHACKLE OPEN IN RAIN OR SNOW.**