

INSTALLATION INSTRUCTIONS
7893 & 8293 Dummy Trim (One Side)



FOR INSTALLATION ASSISTANCE CALL SARGENT AT 1-800-727-5477 • www.sargentlock.com

SARGENT®

ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

PARTS LIST DESCRIPTION	
1. Lever	7. Adapter & Plate Assy.
2. Setscrew	8. Outside Front Screw
3. Spring	9. Outside Front Plate
4. Spindle	10. Screws (2)
5. Rose	11. Inner Plate & Plug Assy.
6. Screws (2)	12. Rose Assy.

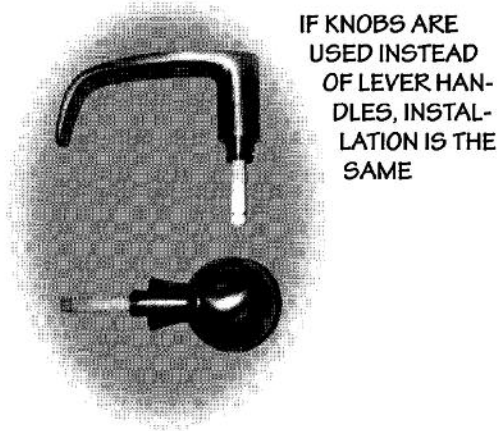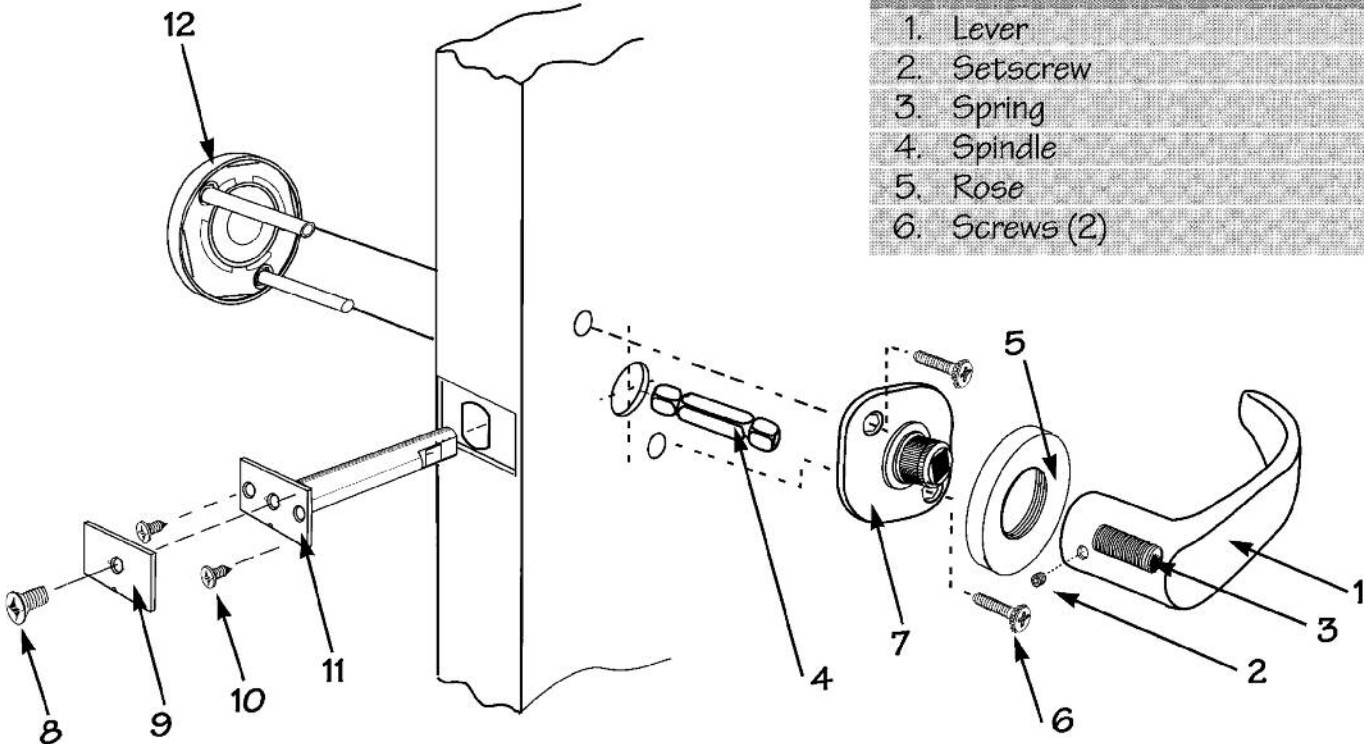

1
INSTALL INNER PLATE & PLUG

- A. INSTALL INNER PLATE AND PLUG ASSEMBLY INTO THE EDGE OF THE DOOR. INSTALL SCREWS INTO PLATE. **DO NOT TIGHTEN SCREWS AT THIS TIME.**
- B. INSERT SPINDLE INTO PLATE AND PLUG ASSEMBLY.

2
INSTALL ROSE ASSEMBLY


- A. INSTALL ROSE ASSEMBLY WITH MOUNTING POSTS ATTACHED INTO THE THRU-BOLT HOLES IN THE DOOR.
- B. INSTALL ADAPTER PLATE USING THE SCREWS WITH LOCKWASHERS ATTACHED TO THE ROSE ASSEMBLY.
- C. SCREW THE ROSE TO THE ADAPTER PLATE AND INSTALL LEVER USING 1/8" HEX WRENCH.

3
INSTALL OUTSIDE FRONT


- A. TIGHTEN SCREWS TO INNER PLUG & PLATE ASSEMBLY AND INSTALL OUTSIDE FRONT PLATE.

INSTALLATION INSTRUCTIONS
7894 & 8294 Dummy Trim (Both Sides)

PARTS LIST DESCRIPTION	
1. Lever	7. Adapter & Plate Assy.
2. Setscrew	8. Outside Front Screw
3. Spring	9. Outside Front Plate
4. Spindle	10. Screws (2)
5. Rose	11. Inner Plate & Plug Assy.
6. Screws (2)	12. Rose & Lever Assy.

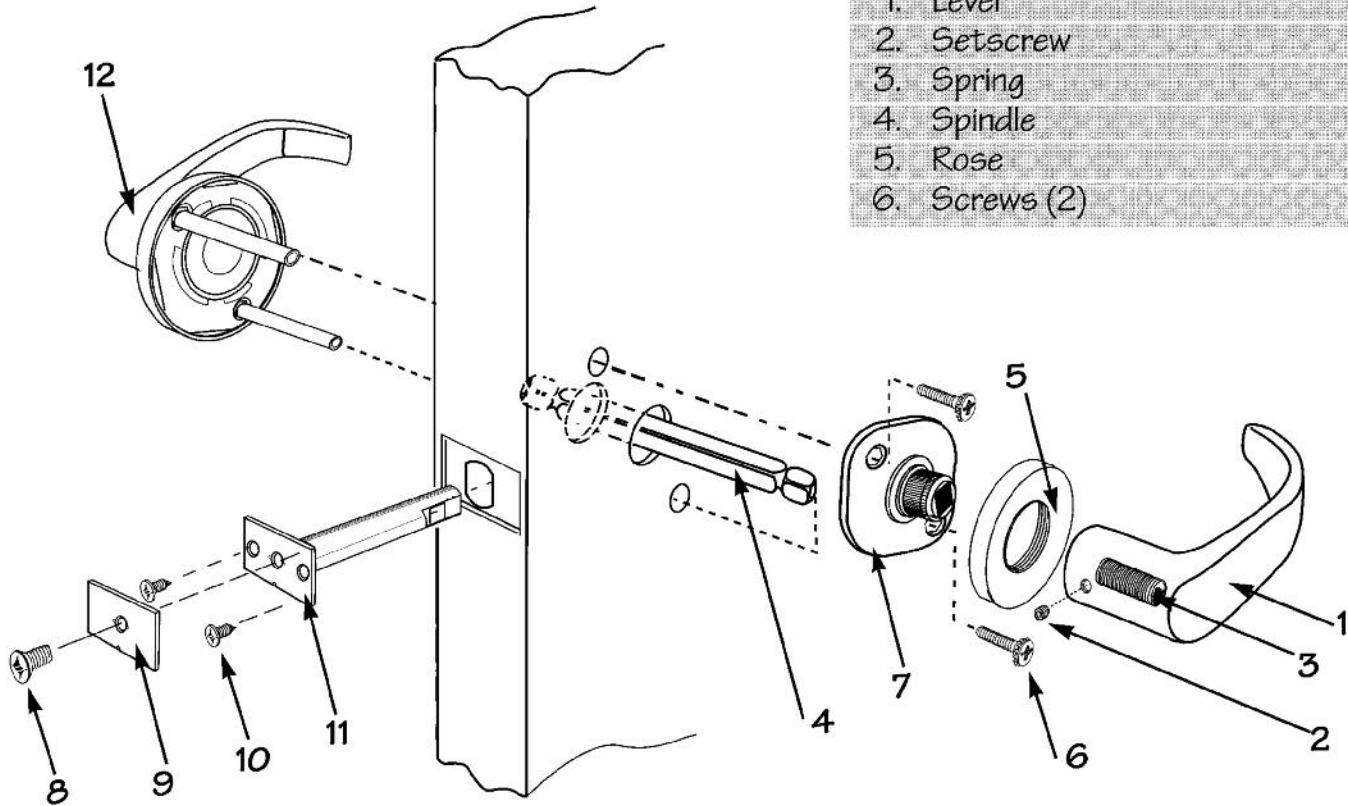

Inactive Door Preparation

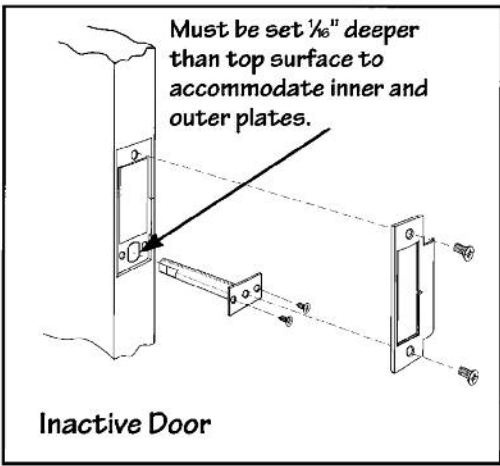

1
INSTALL INNER PLATE & PLUG

- A. INSTALL INNER PLATE AND PLUG ASSEMBLY INTO THE EDGE OF THE DOOR. INSTALL SCREWS INTO PLATE. **DO NOT TIGHTEN SCREWS AT THIS TIME.**
- B. INSERT SPINDLE INTO PLATE AND PLUG ASSEMBLY.

2
INSTALL ROSE & LEVER ASSEMBLY

- A. INSTALL ROSE & LEVER ASSEMBLY WITH MOUNTING POSTS ATTACHED INTO THE THRU-BOLT HOLES IN THE DOOR.
- B. INSTALL ADAPTER & PLATE ASSEMBLY USING THE SCREWS WITH LOCKWASHERS ATTACHED TO THE ROSE & LEVER ASSEMBLY.
- C. SCREW THE ROSE TO THE ADAPTER PLATE AND INSTALL LEVER USING 1/8" HEX WRENCH.

3
INSTALL OUTSIDE FRONT

- A. TIGHTEN SCREWS TO INNER PLATE & PLUG ASSEMBLY AND INSTALL OUTSIDE FRONT PLATE.