


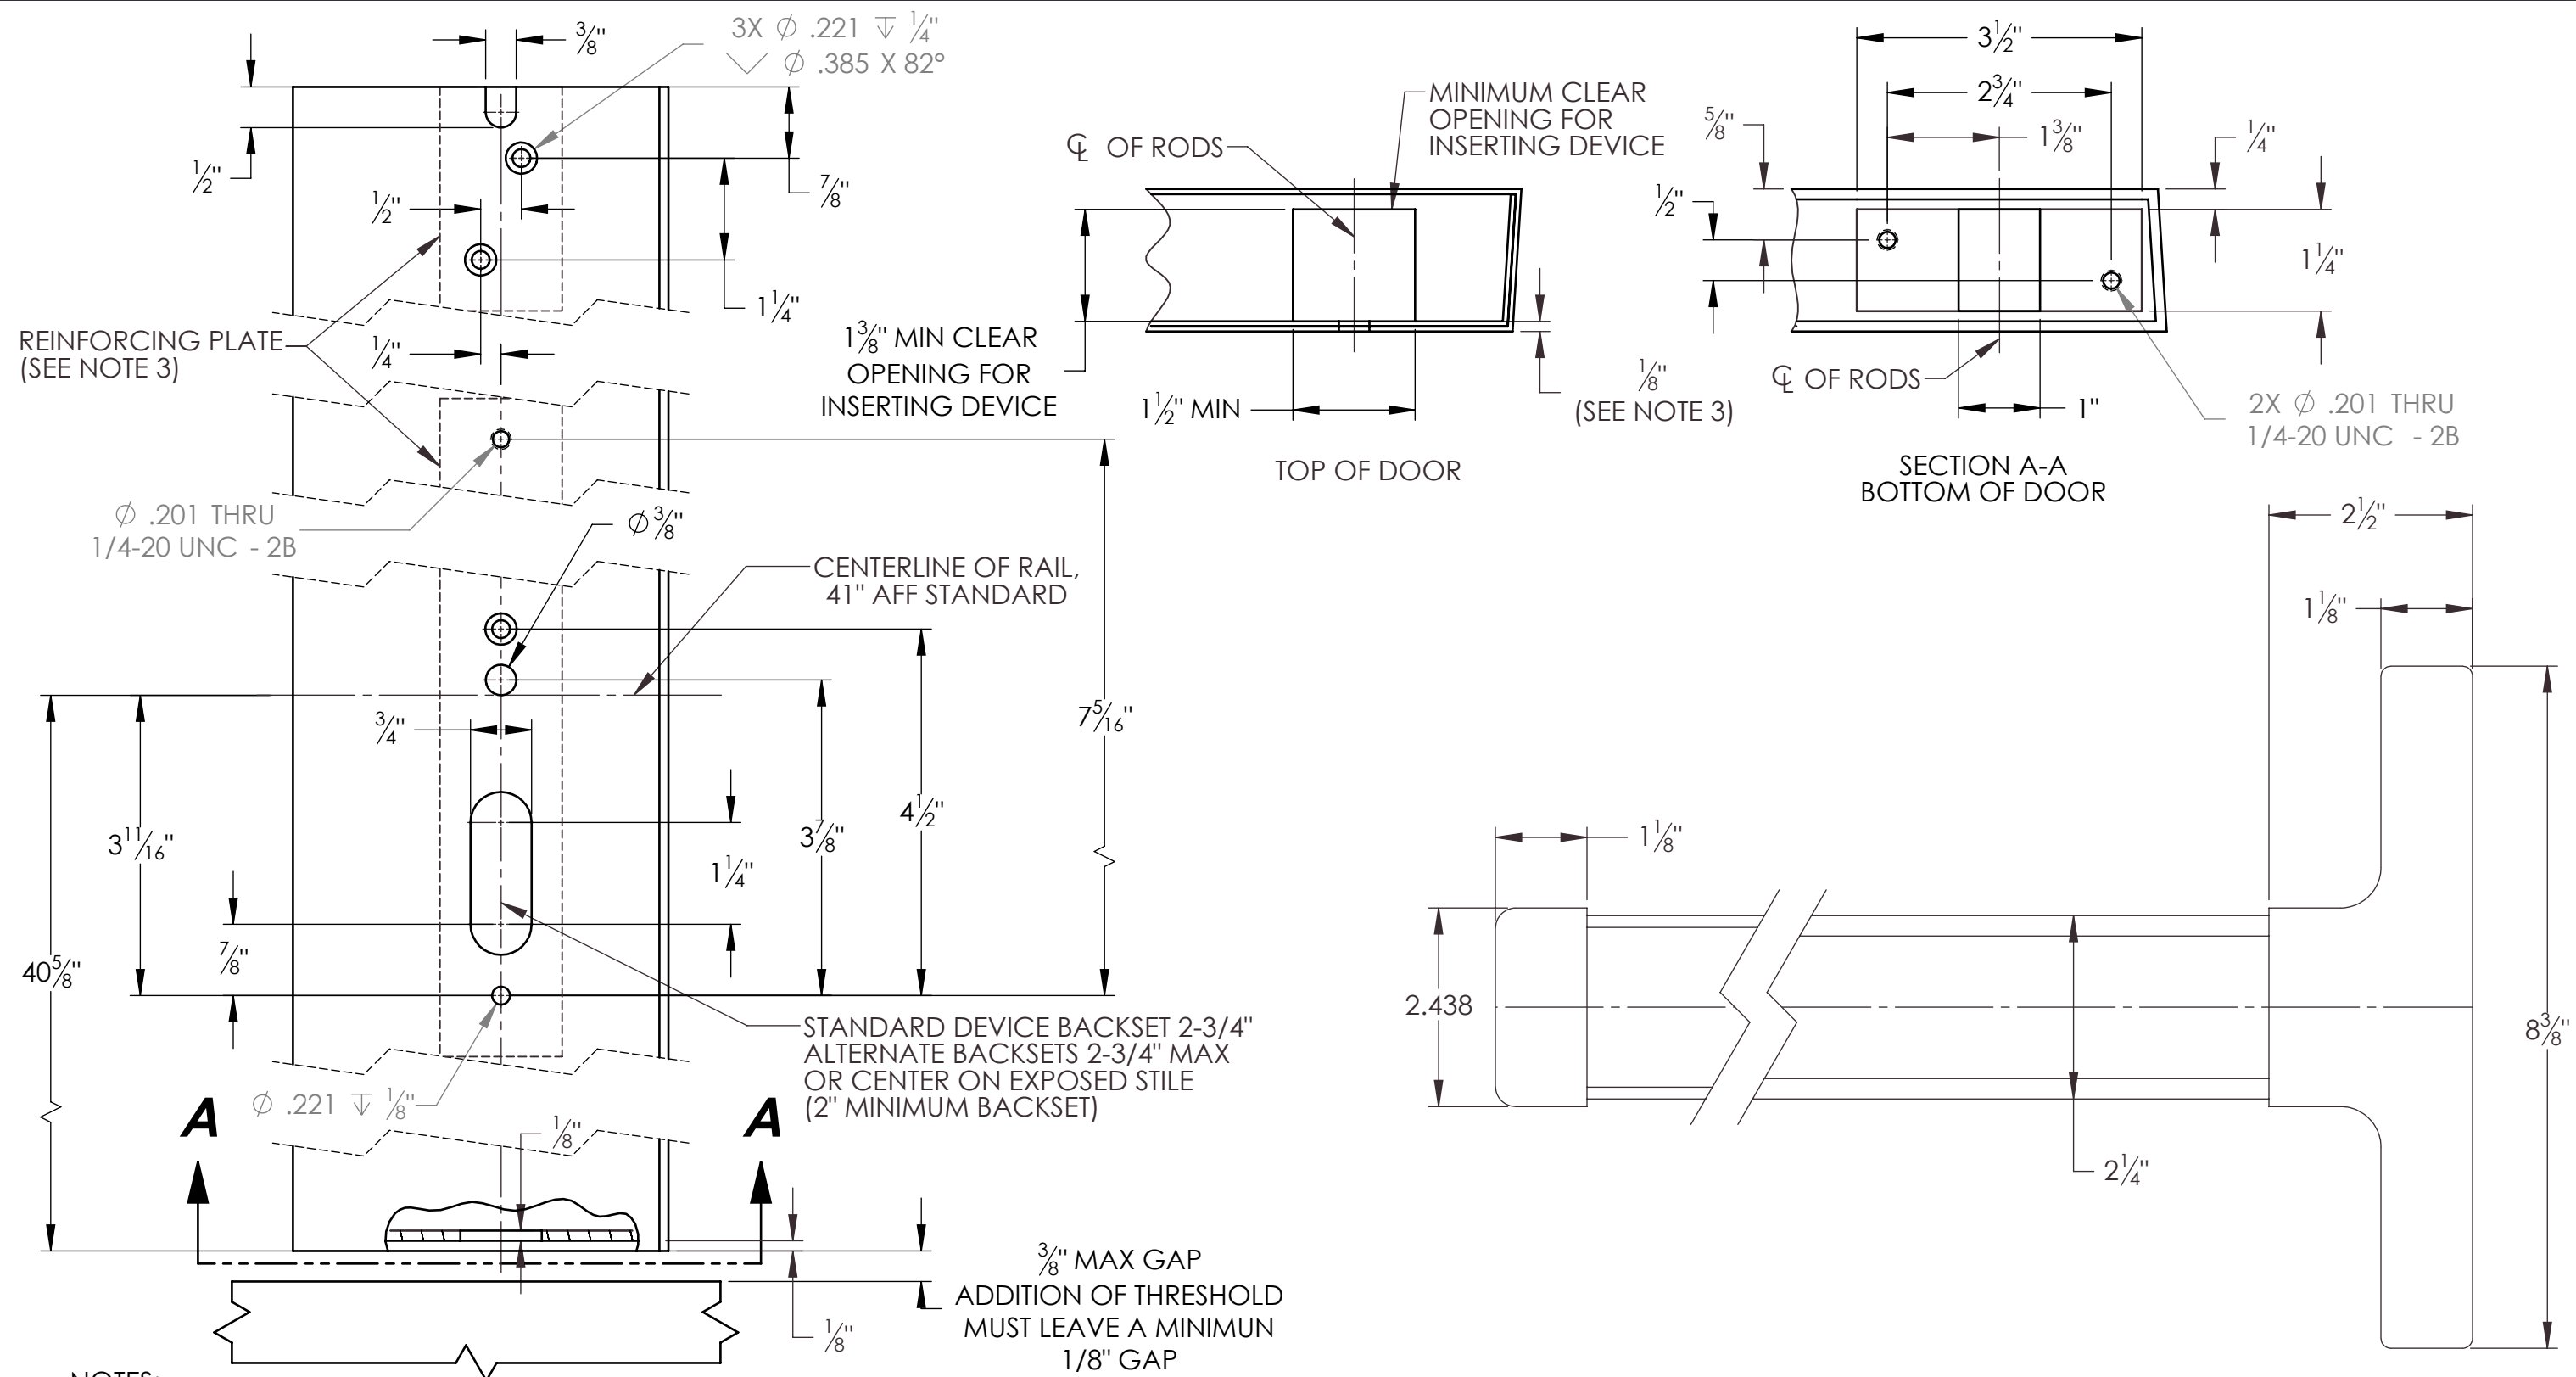

NOTES:

- DOOR PREPARATION SHOWN FOR INSIDE OF DOOR ONLY.
- IF OUTSIDE PULL AND/OR OUTSIDE CONTROL IS USED, SEE APPROPRIATE DOOR TEMPLATE FOR OUTSIDE DOOR PREP.
- REINFORCE HOLLOW METAL DOORS FOR TOP, BOTTOM AND INNER CHASSIS WHERE HARDWARE IS TO BE ATTACHED. DOOR SKIN AND REINFORCEMENT PLATE TO BE 1/8" COMBINED THICKNESS.
- SURFACE OF DOOR WHERE EXIT DEVICE IS TO BE APPLIED, MUST BE FLUSH.
- TOLERANCE ON ALL FRACTIONAL DIMENSIONS $\pm 1/64$ "
- SEE TEMPLATE NO. 4568 FOR ELECTROLYNX DETAILS WHEN NEEDED.
- SEE STRIKE TEMPLATE NO. 4449 FOR STRIKES

SARGENT® Manufacturing Company
100 Sargent Drive New Haven, CT 06511

TEMPLATE: MD-8400, 12-MD-8400
CONCEALED VERTICAL ROD EXIT
DEVICE FOR METAL DOORS
(INSIDE FACE ONLY)

RELEASE DATE
JUNE 8, 2009
TEMPLATE NO.
4447 J